



Dimension mm(inches)

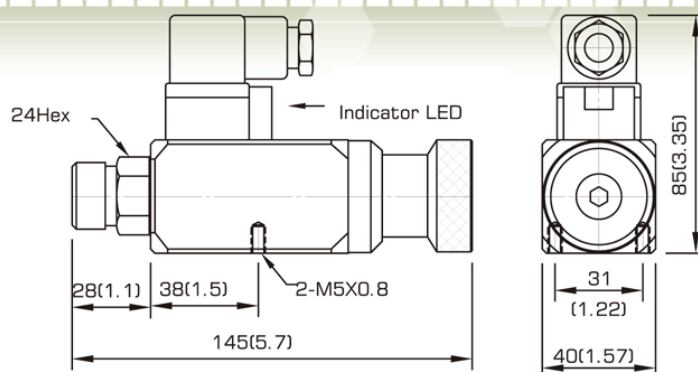

### Ordering Code

**DNA-250K-22B**



1 Model


Direct Pressure Read-out, Standard type

2 Pressure Adj. Range


Model	Press Adj. Range bar	Surge Pres. bar	Set Pres. bar	kg Weight DNA
030K	4~30	80	14	1.0
040K	8~40	150	20	1.0
070K	10~70	150	38	1.0
100K	15~100	250	50	1.0
150K	20~150	250	70	1.0
250K	40~250	400	100	1.0
360K	50~360	400	200	1.0

3 22B: Without indicator LED  
06i: With indicator LED


### Performance Curves




DNA-030K  
DNA-040K



DNA-070K  
DNA-100K




DNA-150K  
DNA-250K




DNA-360K

### Schematic Cross-Section



1	Housing (Casting-Iron)	5	Piston
2	1/4 BSP	6	Microswitch
3	Pressure Adj. knob	7	Electrical connection
4	Spring	8	Indicator LED



N.O.=Normally open  
N.C.=Normally close

Switching capacity

22B:250VAC:3A 30VDC:2A  
06i:24~250V(DC/AC)≤0.6A