




**M+S HYDRAULIC**

# **HYDRAULIC BRAKES MOTOR-BRAKES & VALVE BLOCKS**

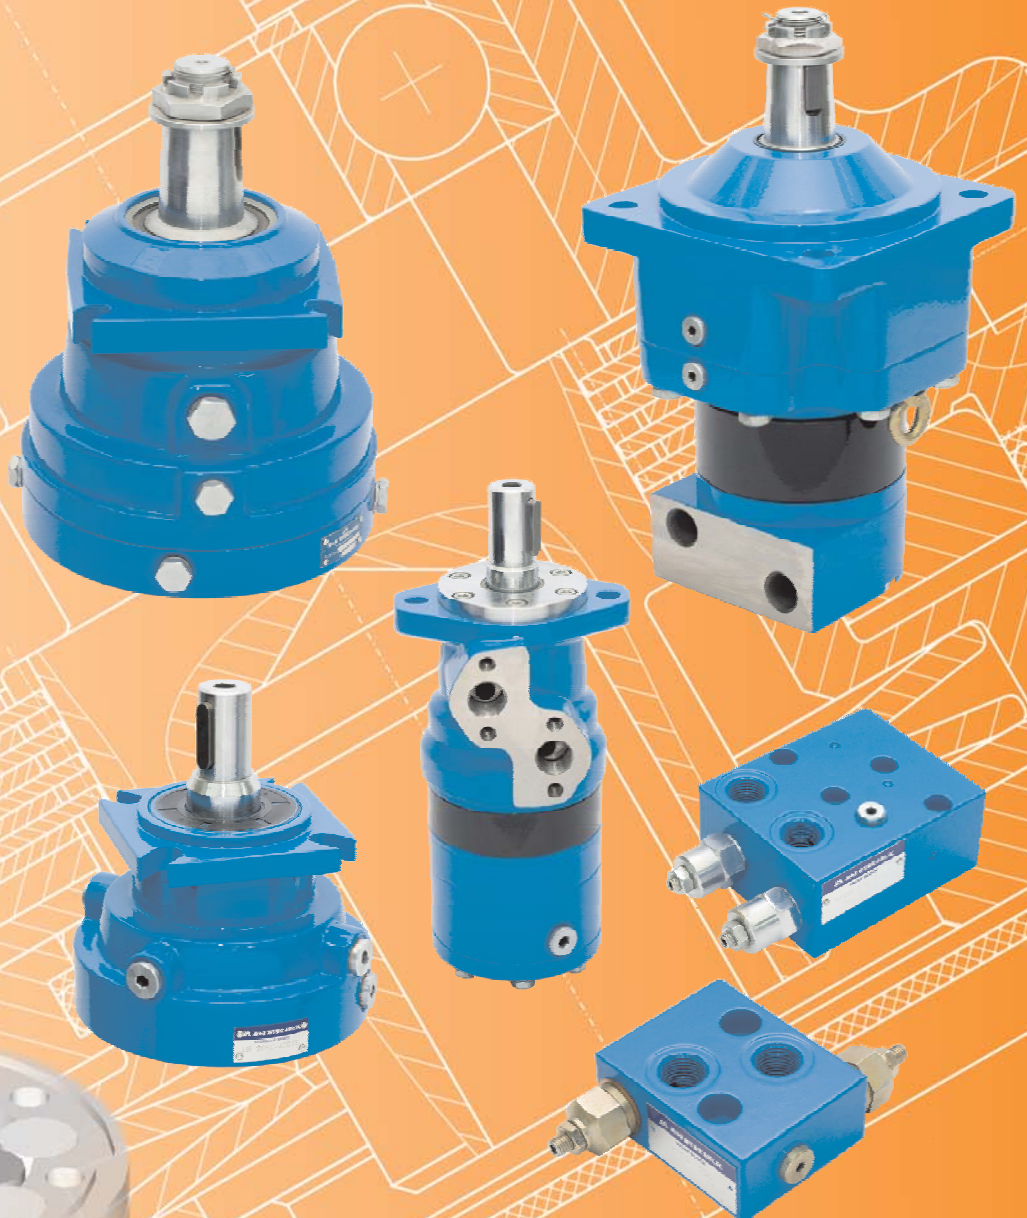

# ACCESSORIES and MOTOR-BRAKES

## CONTENTS

	Page
● Hydraulic Disc Brake for MP, MR and MS type LB/288 .....	3
● Hydraulic Disc Brake for MSS type LBS/289(290) and MSV type LBV/289(290) .....	6
● Hydraulic Disc Brake for MTS type LBS/314(315) and MTV type LBV/314(315) .....	10
● Hydraulic Disc Brake for MVS type LBS/313 and type LBS/316 .....	14
● Hydraulic Disc Brake type B...R .....	18
● Hydraulic Disc Brake type B...T .....	19
● Hydraulic Disc Brake type B-130K.....	20
● Hydraulic Motor-brakes type B/MR .....	21
● Hydraulic Motor-Brakes type MT/B .....	27
● Hydraulic Motor-brakes type MTM/B .....	31
● Hydraulic Motor-brakes type SW .....	36
● Hydraulic Motor-brakes type TW .....	39
● Overcenter Valves with Brake Control .....	42
● Switch Valves .....	48
● Crossover Relief Valves .....	50
● Motor-Brakes Special Features .....	59
● Application Calculation .....	60

"M+S HYDRAULIC" can accept no responsibility for possible errors in catalogues, brochures and other printed material.

"M+S HYDRAULIC" reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.

# HYDRAULIC DISC BRAKES LB, LBS, LBV- Wet



## APPLICATION

- » Heavy Duty machinery
- » Wheel drives
- » Material handling
- » Mining
- » Agriculture
- » Conveyors
- » Door openers and swing drives etc.




## GENERAL

<b>Fluid type</b>	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range, °C [°F]</b>	-40÷140 [-40÷284]
<b>Viscosity range, mm²/s</b>	20÷75 [98÷347]
<b>Filtration</b>	ISO code 20/16 (nominal filtration of 25 micron)
<b>Maintenance</b>	Changed after the first 50-100 h, then after every 500-1500 h.


## CONTENTS

Hydraulic Disc Brake for MP, MR and MS Motors type LB/288 .....	4÷5
Hydraulic Disc Brake for MSS and MSV type LBS(V)/289 .....	6
Hydraulic Disc Brake for MSS and MSV type LBS(V)/290 .....	7
Output Shafts for LBS(LBV)/289, 290 .....	8
Specification data for LBS(LBV)/289, 290 .....	8
Load curve for LBS(LBV)/289, 290 .....	8
Internal Spline data for .../289,290 and .../314,315.....	9
Order code for LB/288,LBS(LBV)/289, 290 .....	9
Hydraulic Disc Brake for MTS and MTV type LBS(LBV)/314 .....	10
Hydraulic Disc Brake for MTS and MTV type LBS(LBV)/315 .....	11
Specification data for LBS(LBV)/314, 315 .....	12
Load curve for LBS(LBV)/314, 315 .....	12
Output Shafts for LBS(LBV)/314, 315 .....	13
Order code for LBS(LBV)/314, 315 .....	13
Hydraulic Disc Brake for MVS type LBS/313 .....	14
Load curve for LBS/313 .....	14
Hydraulic Disc Brake for MVS type LBS/316 .....	15
Load curve for LBS/316 .....	15
Specification data for LBS/313, 316.....	16
Output Shafts for LBS/313, 316 .....	16
Internal Spline data for LBS/313, 316 .....	17
Order code for LBS/313, 316 .....	17

### LB, LBS




### LBV

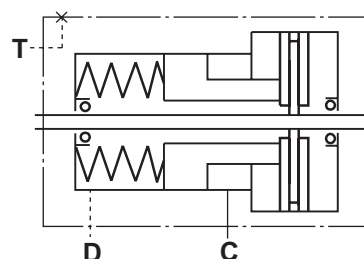


## HYDRAULIC DISC BRAKE FOR FLANGE ATTACHMENT TO MP, MR AND MS HYDRAULIC MOTORS

### TYPE LB/288

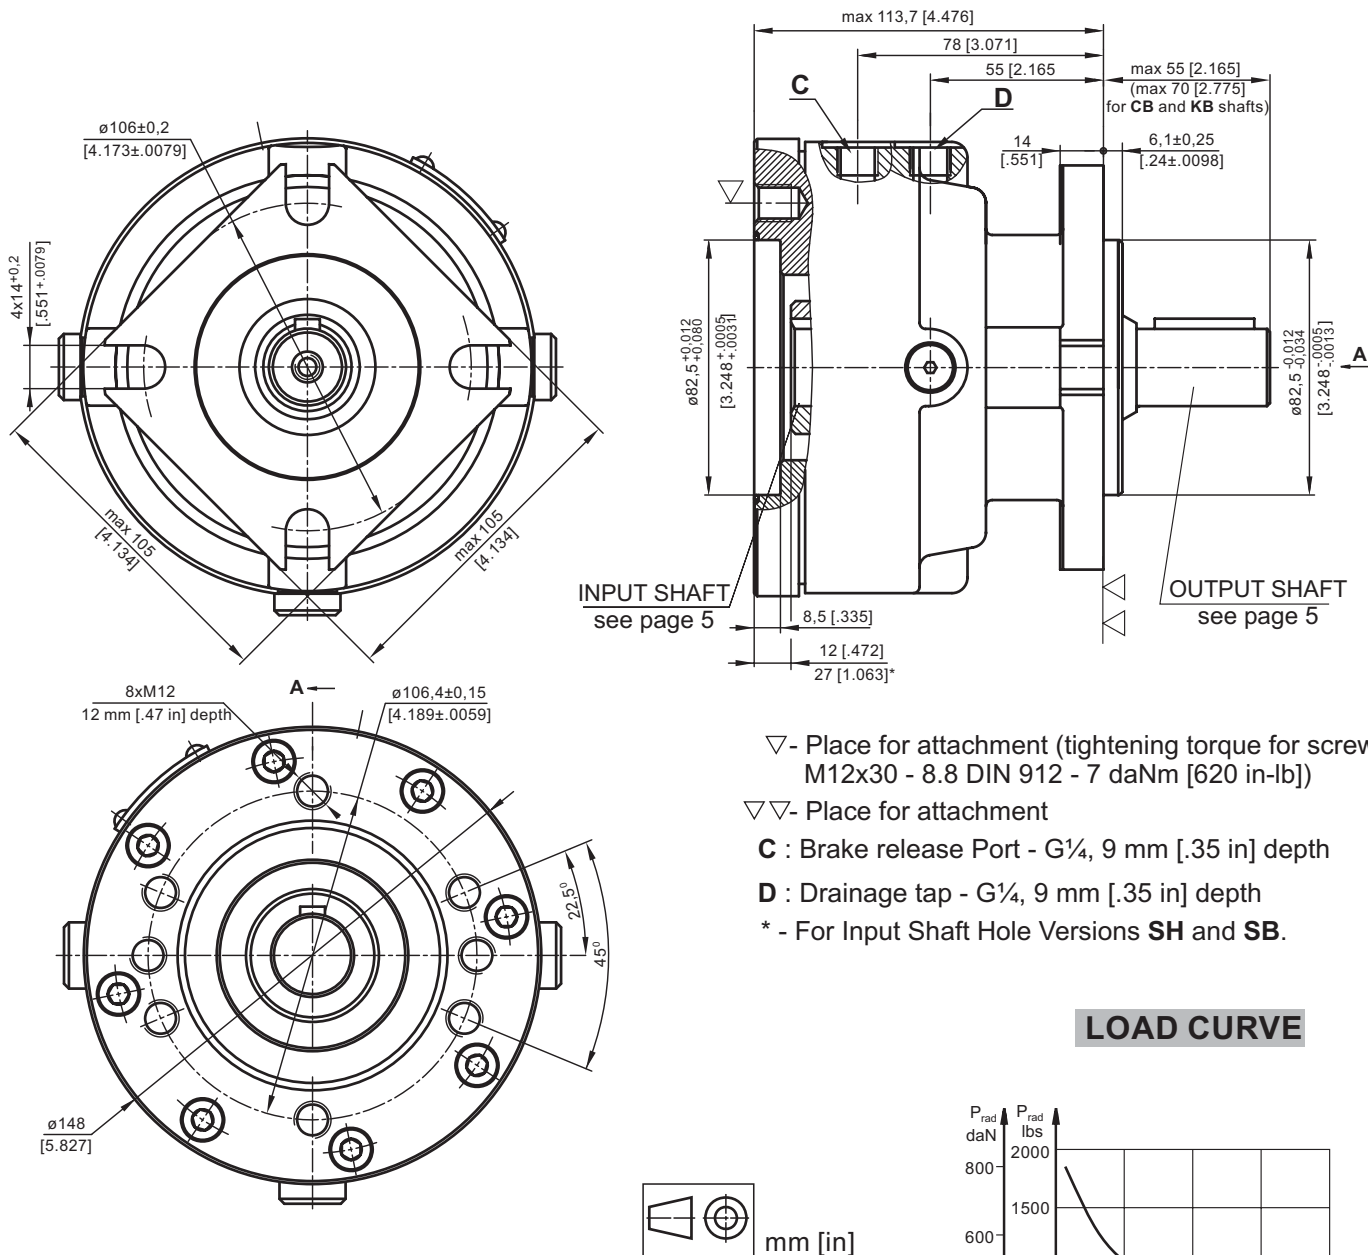

### LOAD CURVE

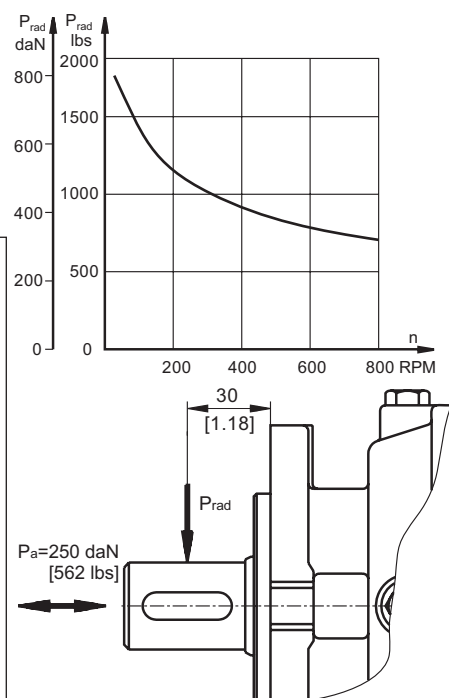

### SPECIFICATION DATA


Description LB/288...	7	14	21	32	43	63
*Min. Static Torque, daNm [lb-in]	6-8 [531-708]	13-15 [1150-1327]	20-22 [1770-1947]	31-34 [2743-3009]	41-45 [3628-3982]	61-64 [5399-5665]
Opening Pressure min bar [PSI]	4-8 [58-116]	9-16 [130-232]	17-23 [247-334]			
max	300 [4350]					
Min. oil quantity for brake releasing cm³ [in³]	7 - 8 [.427 - .488]					
Oil volume cm³ [in³]	50 - 120 [3.5 - 7.35]					
Max. Pressure in drain space bar [PSI]	0,5 [7.25]					
Weight kg [lb]	9 [19.8]					

\*Static torque is obtained at working pressure - 0 bar [0 PSI].




## INPUT SHAFT HOLES


**C**

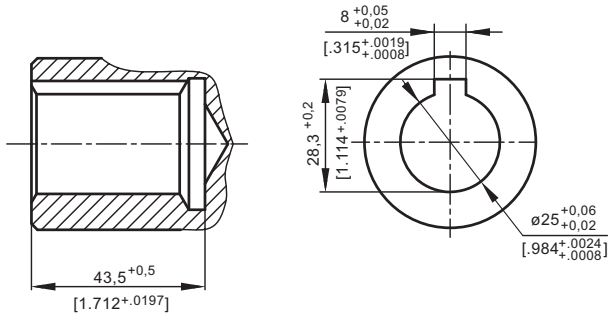


**CO**

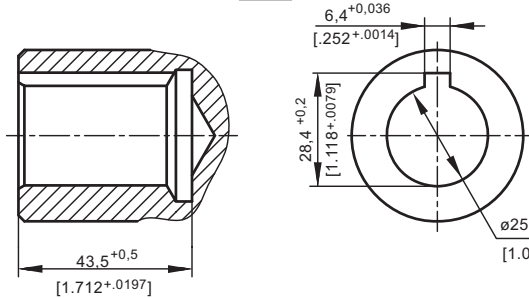


**SH**

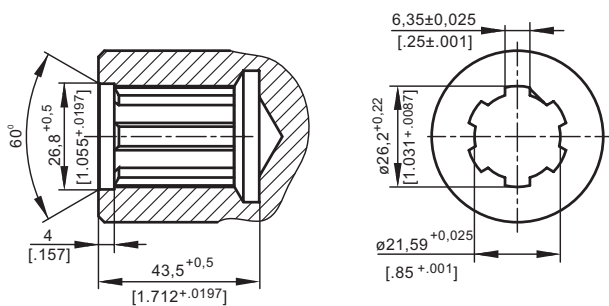

**SB**

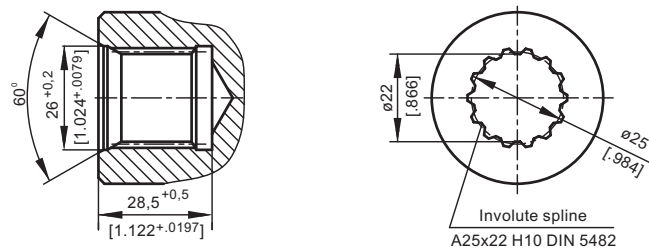


**CB**

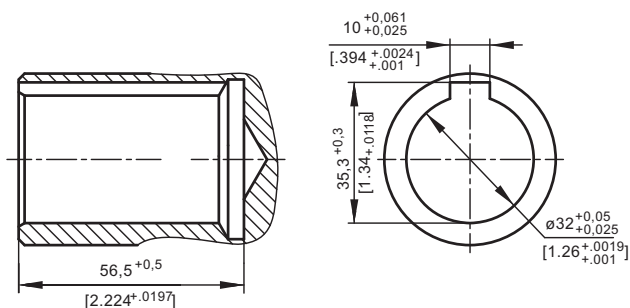


## OUTPUT SHAFT EXTENSIONS


**C** -  $\varnothing 25$  straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 34 daNm [3010 lb-in]

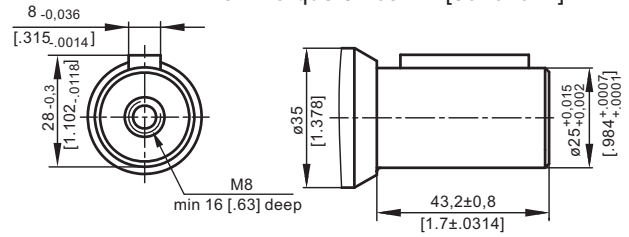


**CO** -  $\varnothing 1"$  straight, Parallel key  $\frac{1}{4} \times \frac{1}{4} \times \frac{1}{4}$  BS46  
Max. Torque 34 daNm [3010 lb-in]

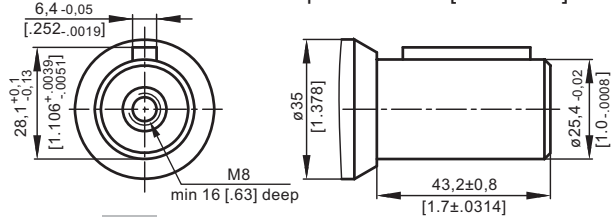


**SH** - splined, BS 2059 (SAE 6B)  
Max. Torque 40 daNm [3540 lb-in]

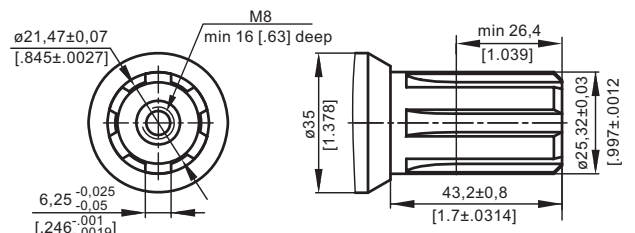


**SA** - splined, B25x22h9 DIN 5482  
Max. Torque 40 daNm [3540 lb-in]

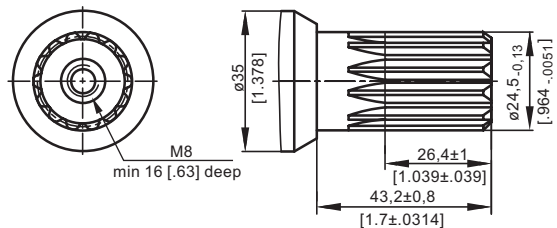

**CB** -  $\varnothing 32$  straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 77 daNm [6815 lb-in]

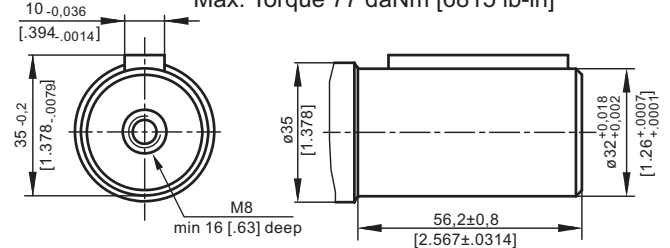


**KB** - tapered 1:10, Parallel key B6x6x20 DIN 6885  
Max. Torque 95 daNm [8400 lb-in]

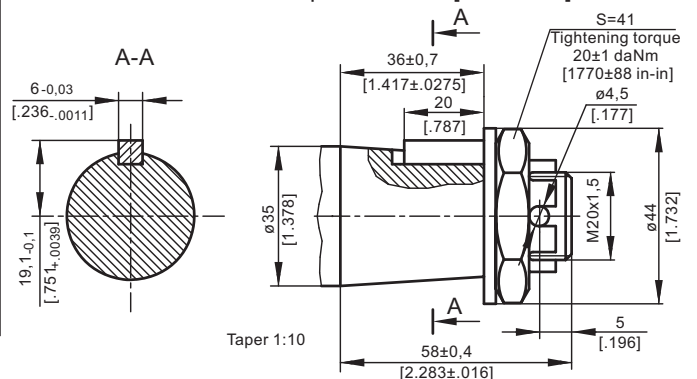

Taper 1:10

# HYDRAULIC DISC BRAKE FOR FLANGE ATTACHMENT TO MSS AND MSV HYDRAULIC MOTORS

## TYPE LBS/289

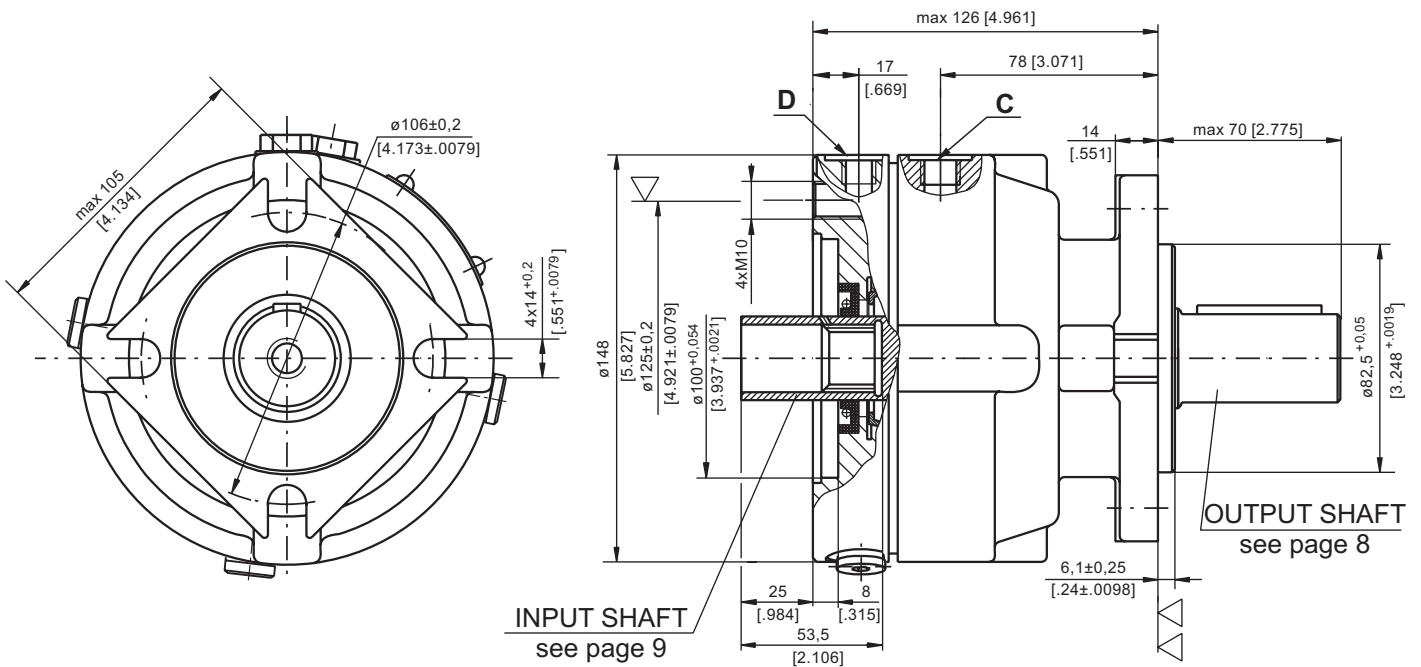


▽ - Place for attachment  
(tightening torque for screw M10x35 - 8.8 DIN 912 - 5 daNm [440 lb-in])

▽▽ - Place for attachment



## TYPE LBV/289

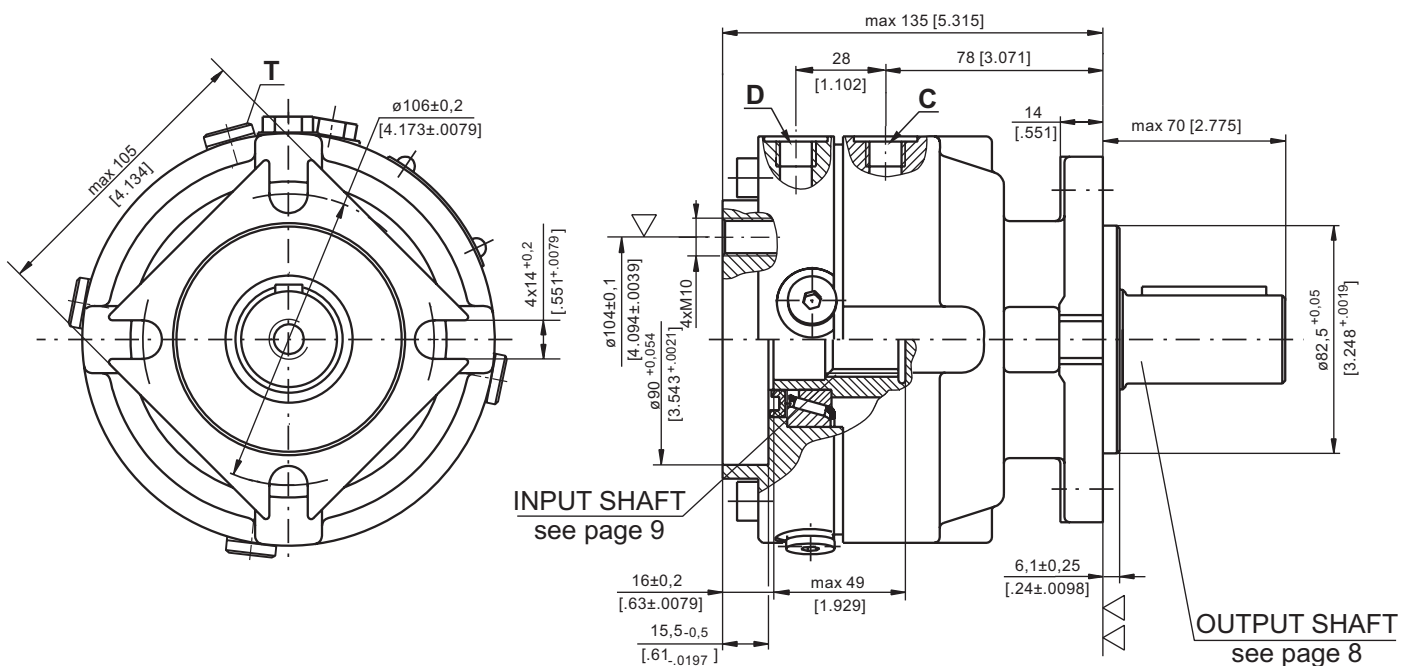

▽ - Place for attachment  
(tightening torque for screw M10 - 8.8 DIN 912 - 5 daNm [440 lb-in])


▽▽ - Place for attachment

**C** : Brake release Port - G $\frac{1}{4}$ , 9 mm [.35 in] depth

**D, T**: Drainage tap - G $\frac{1}{4}$ , 9 mm [.35 in] depth

## HYDRAULIC DISC BRAKE FOR FLANGE ATTACHMENT TO MSS AND MSV HYDRAULIC MOTORS

### TYPE LBS/290

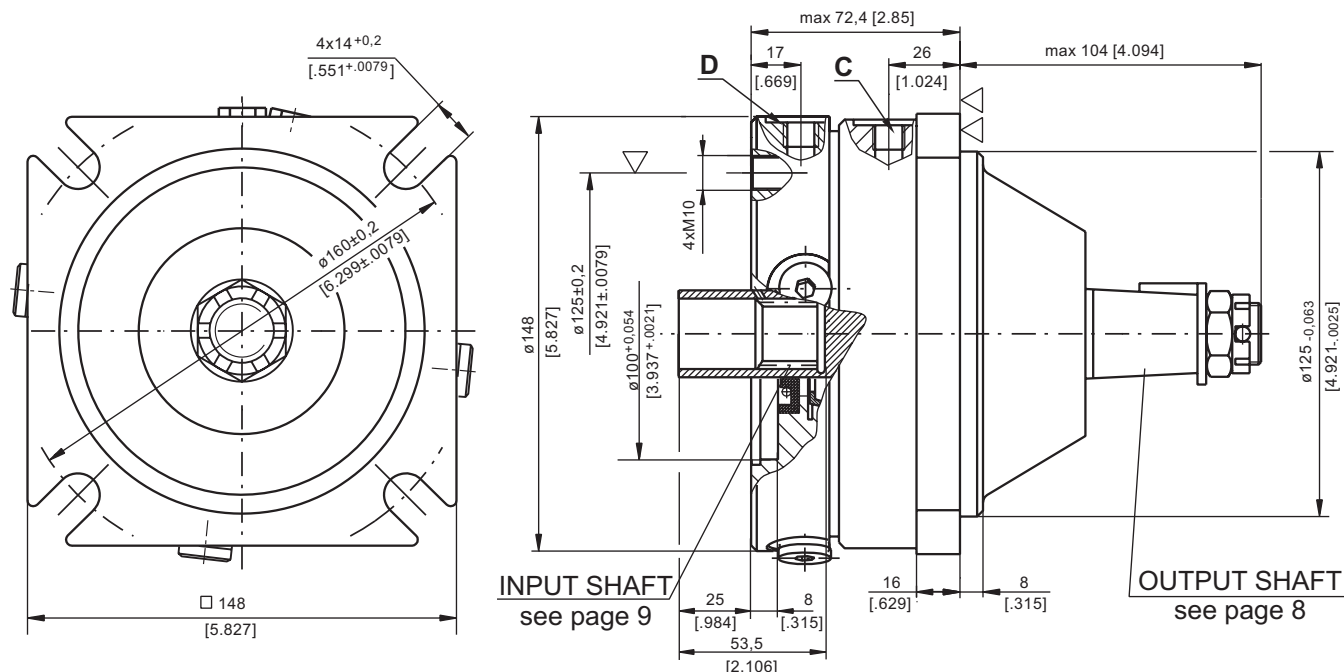


▽ - Place for attachment

(tightening torque for screw M10x35 - 8.8 DIN 912 - 5 daNm [440 lb-in])

▽▽ - Place for attachment

### TYPE LBV/290

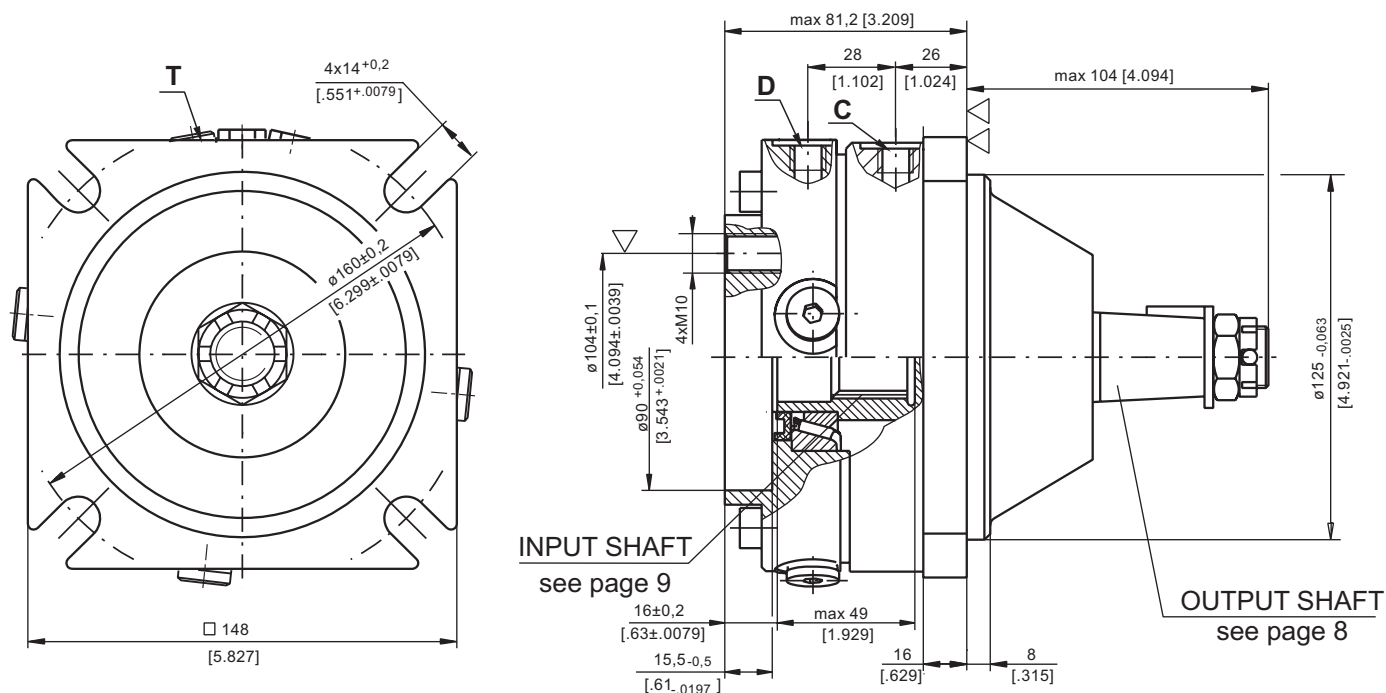

▽ - Place for attachment

(tightening torque for screw M10 - 8.8 DIN 912  
- 5 daNm [440 lb-in])


▽▽ - Place for attachment

C : Brake release Port - G $\frac{1}{4}$ , 9 mm [0.35 in] depth



D, T: Drainage tap - G $\frac{1}{4}$ , 9 mm [0.35 in] depth

## OUTPUT SHAFT EXTENSIONS

**CB** -  $\phi 32$  straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 77 daNm [6815 lb-in]

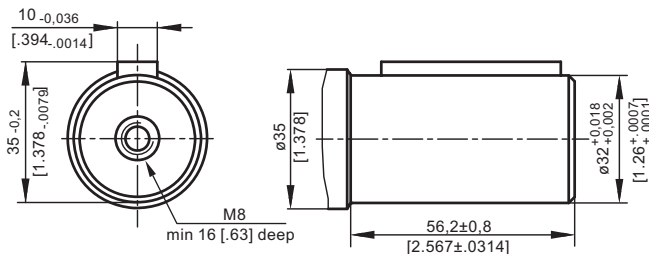

**KB** - tapered 1:10, Parallel key B6x6x20 DIN 6885  
Max. Torque 95 daNm [8400 lb-in]

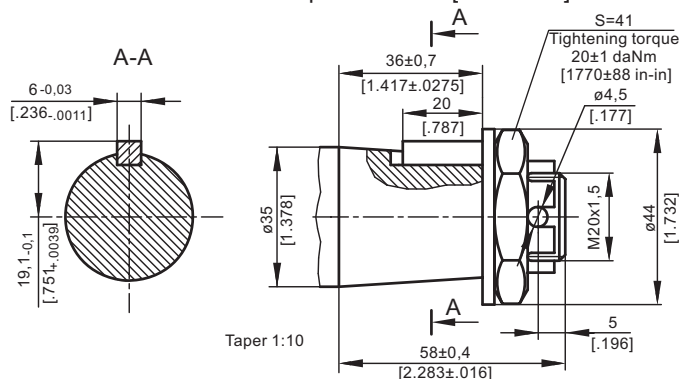

mm [in]

## SPECIFICATION DATA

Description	LBS/289(290) LBV/289(290)	21	32	43	63
*Min. Static Torque, daNm [lb-in]		20-22 [1770-1947]	31-34 [2743-3009]	41-45 [3628-3982]	61-64 [5399-5665]
Opening Pressure bar [PSI]	min	17-23 [247-334]			
	max	300 [4350]			
Min. oil quantity for brake releasing	cm <sup>3</sup> [in <sup>3</sup> ]	7 - 8 [0.427 - .488]			
Oil volume	cm <sup>3</sup> [in <sup>3</sup> ]	50 - 120 [3.05 - 7.35]			
Max. Pressure in drain space	bar [PSI]	5 [72]			
Weight	kg [lb]	9 [19.8]			

\*Static torque is obtained at working pressure - 0 bar [0 PSI].


## LOAD CURVE

The curve applies to a B10 bearing life of 3000 hours at 200 RPM.


1:  $P_a < 350$  daN [787 lbs]

2:  $P_a = 500$  daN [1125 lbs]

**LBS(V)/289**

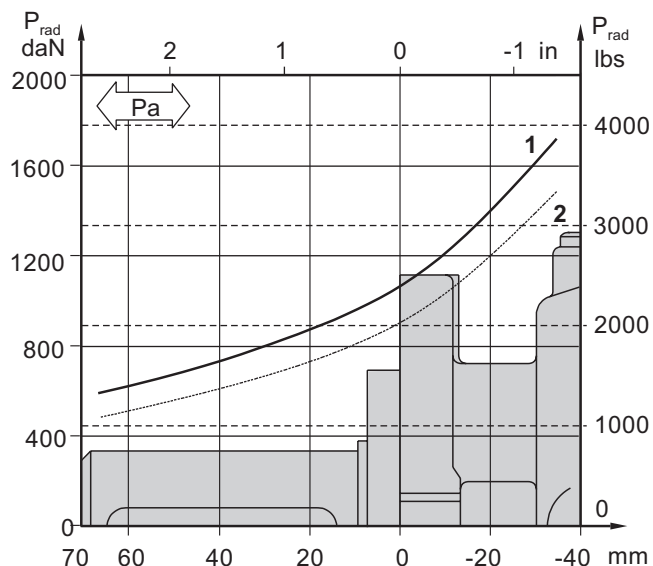

**LBS(V)/290**

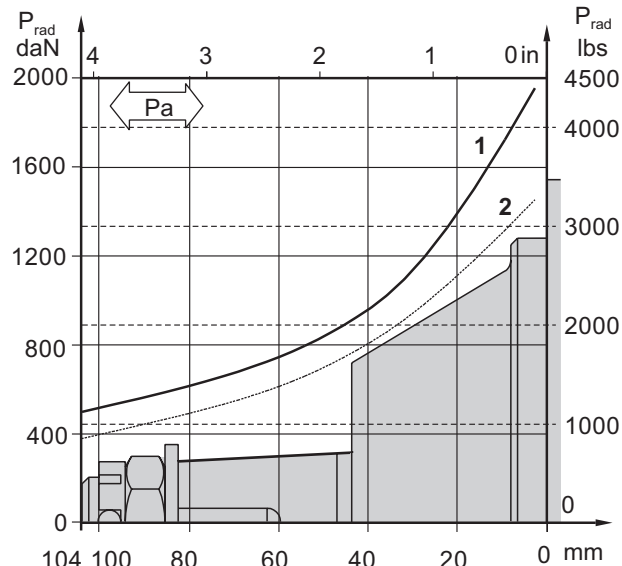




## INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANS B92.1-1970, class 5

[ $m=2.1166$ ]

Fillet Root Side Fit		LBS(V)/289 LBS(V)/290		LBS(V)/314 LBS(V)/315	
		mm	inch	mm	inch
Number of Teeth	z	12	12	16	16
Diametral Pitch	DP	12/24	12/24	12/24	12/24
Pressure Angle		30°	30°	30°	30°
Pitch Dia.	D	25,4	1	33,8656	1.3333
Major Dia.	D <sub>ri</sub>	28,0 <sub>-0,1</sub>	1.1 ± 1.098	38,4 <sub>+0,4</sub>	1.5118±1.5275
Minor Dia.	D <sub>i</sub>	23,0 <sub>+0,033</sub>	.907 ± .905	32,15 <sub>+0,06</sub>	1.2657±1.2673
Space Width [Circular]Lo		4,308±0,020	.1704 ± .1688	4,516±0,037	.1763±.1791
Fillet Radius	R	0,2	.008	0,5	.02
Max. Measurement between Pins	L	17,62 <sub>+0,15</sub>	.699 ± .694	26,9 <sub>+0,10</sub>	1.063±1.059
Pin Dia.	d	4,835±0,001	.19039±.19031	4,835±0,001	.19026±.19034
Corrected	x.m	+0,8	+.031	+1,0	+.039

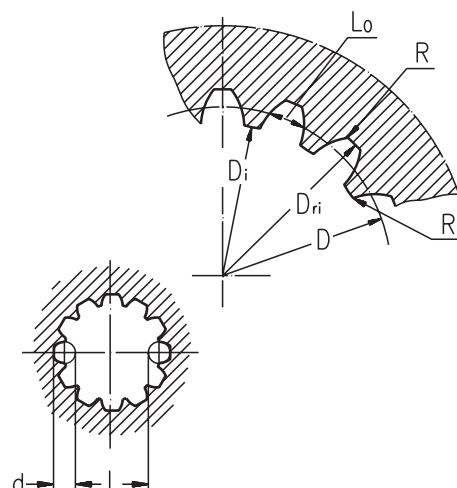

## ORDER CODE - LB/288

1	2	3	4	5
LB/288	-			

## Pos.1 - Input Shaft Hole

C, CO, SH, CB, SB

CB - ø32 straight, Parallel key A10x8x45 DIN 6885

KB - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885

## Pos.2 - Static Torque code (See Specification data)

7, 14, 21, 32, 43, 63

## Pos.4 - Option (Paint)\*\*

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

## Pos.3 - Output Shaft Extensions\*

C - ø25 straight, Parallel key A8x7x32 DIN 6885

CO - ø1" straight, Parallel key 1/4"x1/4"x1/4" BS46

SH - ø25,32 splined BS 2059 (SAE 6B)

SA - ø24,5 splined B25x22 DIN 5482

## Pos.5 - Design Series

omit - Factory specified

## ORDER CODE - LBS, LBV

1	2	3	4	5	6
LB	/	-			

## Pos.1 - Type

S - Disc Brake for short motor S- MSS

V - Disc Brake for very short motor V- MSV

## Pos.4 - Output Shaft Extensions\*

CB - ø32 straight, Parallel key A10x8x45 DIN 6885

KB - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885

## Pos.2 - Design code

289 - for MSS and MSV Motors

290 - for MSS and MSV Motors (Wheel Mount)

## Pos.5 - Option (Paint)\*\*

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

## Pos.3 - Static Torque code (See Specification data)

21, 32, 43, 63

## Pos.6 - Design Series

omit - Factory specified

## NOTES:

\* The permissible output torque for shafts must be not exceeded! For Max. Torque values see data on page 5 and 8.

\*\* The color is by customer's request.

The Disc Brakes are mangano-phosphatized as standard.

## ATTENTION:


1. Hydraulic brake is delivered without oil ( it is lubricated only).

2. In all brakes, friction discs and separators should be lubricated. Space is filled with 50 ÷ 120 cm<sup>3</sup> [3.05÷7.32 in<sup>3</sup>] mineral oil HLP (DIN 51524) or HM (ISO 6743/4). For LB/288 fill oil after hydraulic motor assembly.



# HYDRAULIC DISC BRAKES FOR FLANGE ATTACHMENT TO MTS AND MTV HYDRAULIC MOTORS

## TYPE LBS/315

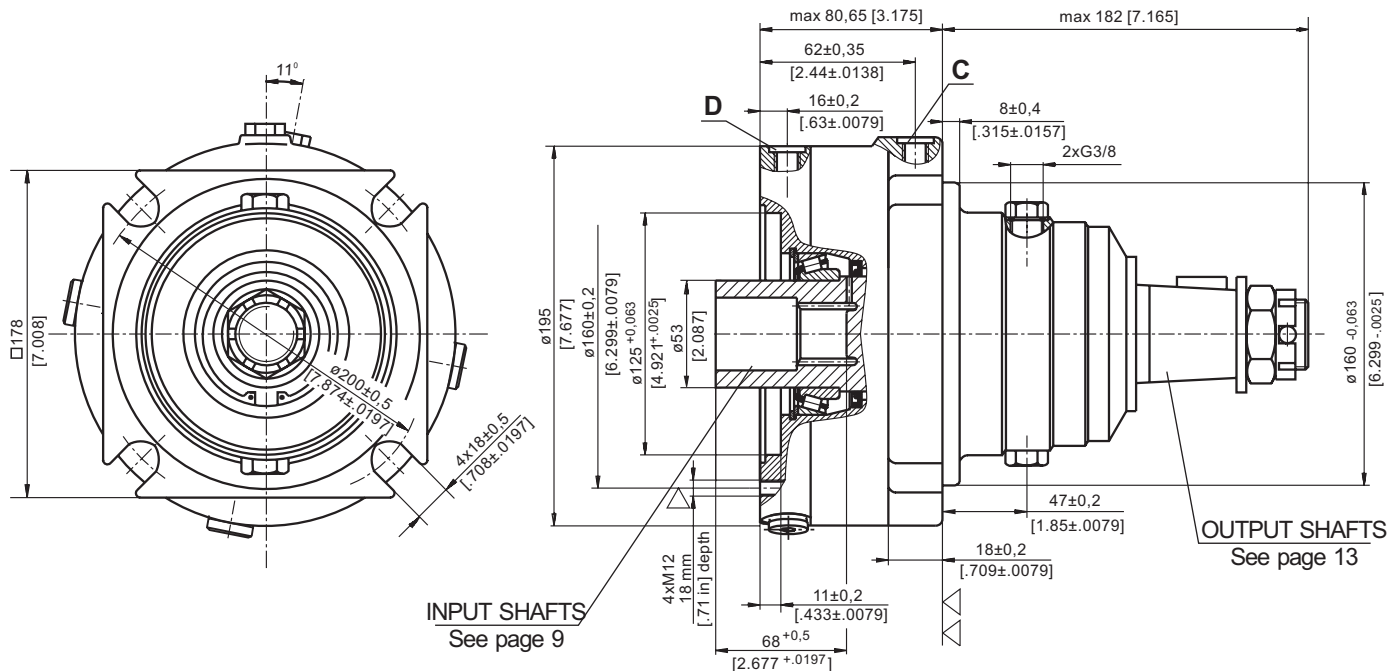

▽ - Place for attachment  
(tightening torque for screw M12x30- 8.8 DIN 912,  
7 daNm [620 lb-in])


▽▽ - Place for attachment

**C** : Brake release Port - G $\frac{1}{4}$ , 12 mm [.47 in] depth

**D** : Drainage tap - G $\frac{1}{4}$ , 12 mm [.47 in] depth



## TYPE LBV/315

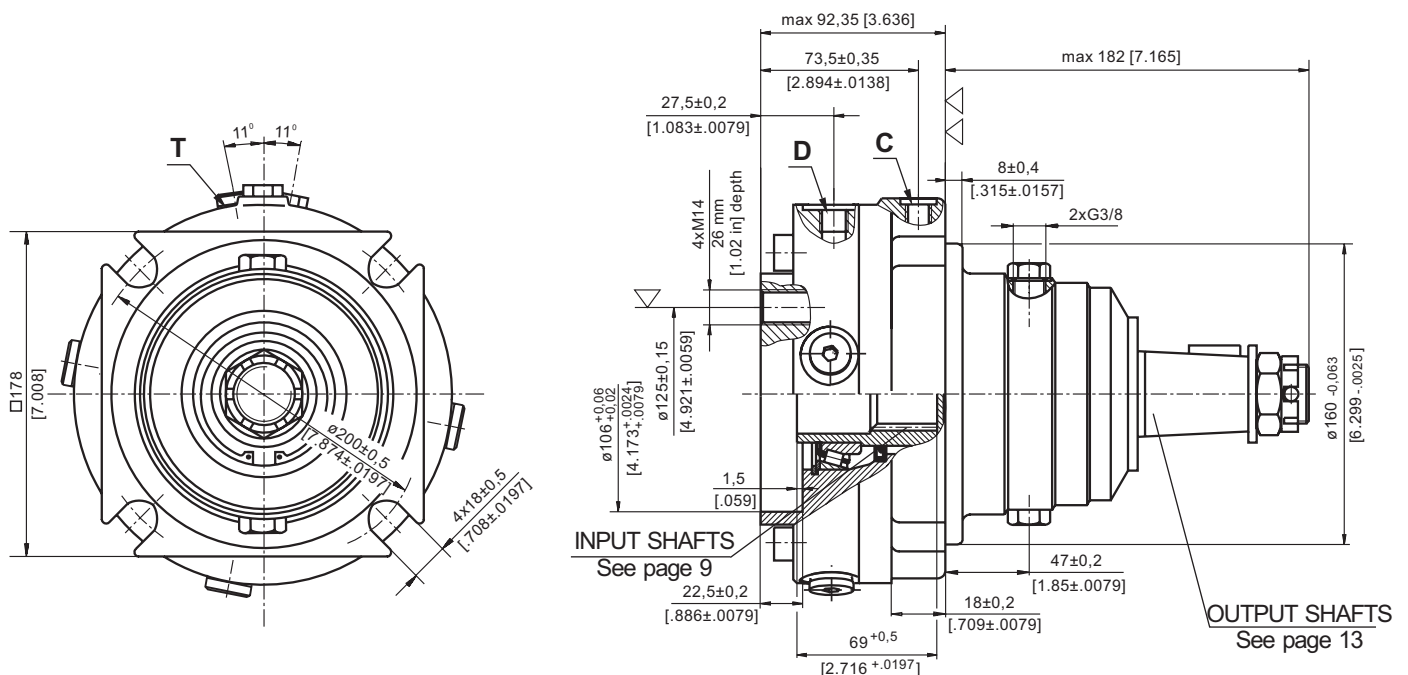

▽ - Place for attachment  
(tightening torque for screw M14 - 8.8 DIN 912,  
11,5 daNm [1020 lb-in])

▽▽ - Place for attachment

**C** : Brake release Port - G $\frac{1}{4}$ , 12 mm [.47 in] depth

**D,T** : Drainage tap - G $\frac{1}{4}$ , 12 mm [.47 in] depth



**SPECIFICATION DATA**

Description <b>LBS/315,315</b>	<b>21</b>	<b>29</b>	<b>43</b>	<b>65</b>	<b>85</b>	<b>110</b>	<b>130</b>
*Min. Static Torque, daNm [lb-in]	18-23 [1593-2036]	28-33 [2478-2921]	42-46 [3717-4071]	61-70 [5399-6196]	83-92 [7346-8143]	108-118 [9559-10444]	126-136 [11152-12037]
Opening Pressure min** bar [PSI]	4-5 [58-72]	6-7 [87-101]	9-10 [130-145]	13-15 [188-217]	18-20 [261-290]	23-25 [333-362]	27-29 [391-420]
	max 300 [4350]						
Min. oil quantity for brake releasing cm <sup>3</sup> [in <sup>3</sup> ]	8-9 [.488-.549]						
Oil volume cm <sup>3</sup> [in <sup>3</sup> ]	250						
Max. Pressure in drain space bar [PSI]	5 [72]						
Weight for .../314 kg [lb]	24 [52.9]						
	.../315 25 [55.1]						

\*Static torque is obtained at working pressure - 0 bar.


\*\*The indicated value is a difference between the inlet pressure for driving of the brake and the drain pressure.

Brakes must always have a drain line

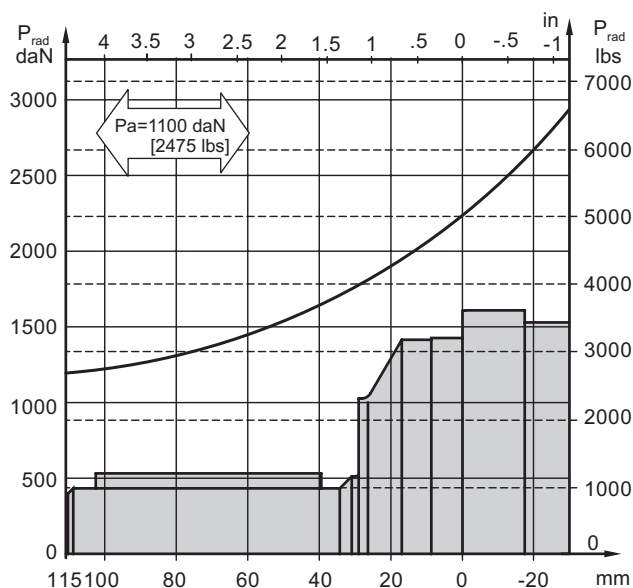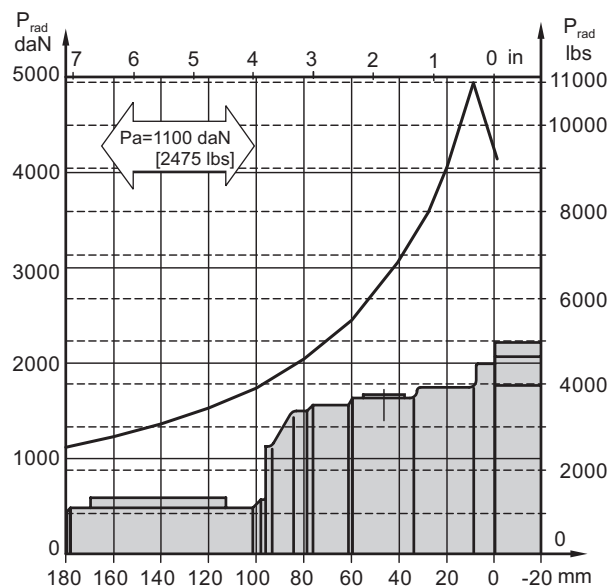
**LOAD CURVE**
**LBS(V) ... /314**

**LBS(V) ... /315**


## OUTPUT SHAFT EXTENSIONS

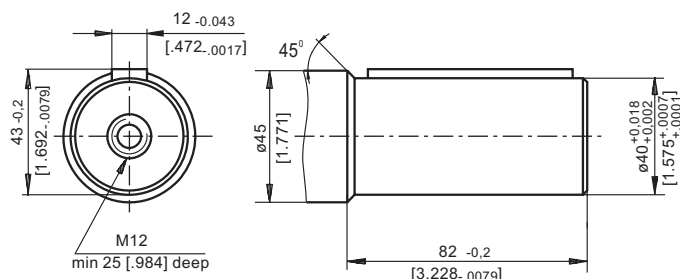
**C** - $\varnothing 40$  straight, Parallel key A12x8x70 DIN 6885  
Max. Torque 132,8 daNm [11755 In-in]

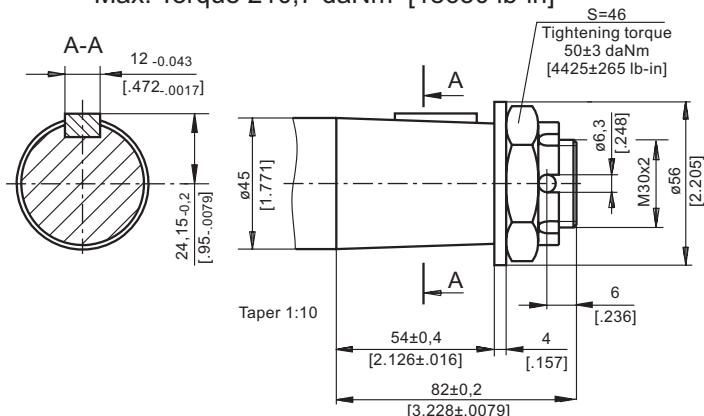


**K** -tapered 1:10, Parallel key B12x8x28 DIN 6885  
Max. Torque 210,7 daNm [18650 lb-in]



**CO** - $\varnothing 1\frac{1}{2}$ " straight, Parallel key  $\frac{3}{8}$ "x  $\frac{3}{8}$ "x  $2\frac{1}{4}$ " BS46  
Max. Torque 132,8 daNm [11755 In-in]

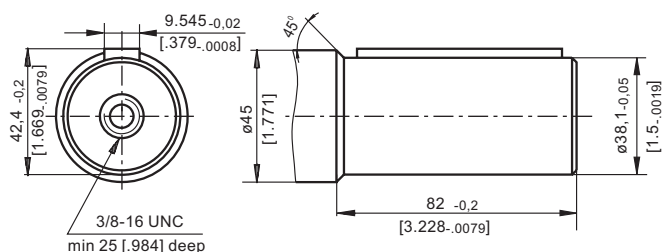

**SH** - $\varnothing 1\frac{1}{2}$ " splined 17T, DP 12/24 ANSI B92.1-1976  
Max. Torque 132,8 daNm [11755 In-in]

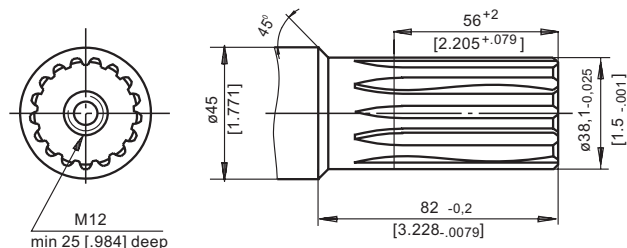

## ORDER CODE

1	2	3	4	5	6
LB	/	-			

## Pos.1 - Type

- S** - Disc Brake for short motor **S** - MTS  
**V** - Disc Brake for very short motor **V** - MTV

## Pos.2 - Design code

- 314** - for MTS and MTV Motors  
**315** - for MTS and MTV Motors (Wheel Mount)

## Pos.3 - Static Torque code (See Specification data)

**21, 29, 43, 65, 85, 110, 130**

## Pos. 4 - Output Shaft Extensions\*

- C** -  $\varnothing 40$  straight, Parallel key A12x8x70 DIN 6885  
**CO** -  $\varnothing 1\frac{1}{2}$ " straight, Parallel key  $\frac{3}{8}$ "x  $\frac{3}{8}$ "x  $2\frac{1}{4}$ " BS46  
**SH** -  $\varnothing 1\frac{1}{2}$ " splined 17T, ANSI B92.1-1976  
**K** -  $\varnothing 45$  tapered 1:10, Parallel key B12x8x28 DIN6885

## Pos. 5 - Option (Paint)\*\*

- omit - no Paint  
**P** - Painted  
**PC** - Corrosion Protected Paint

## Pos. 6 - Design Series

- omit - Factory specified

## NOTES:

\* The permissible output torque for shafts must be not exceeded!

\*\* The color is by customer's request.

The Disc Brakes are mangano-phosphatized as standard.


## ATTENTION:

- Hydraulic brake is delivered without oil ( it is lubricated only).
- In all brakes, friction discs and separators should be lubricated. Space is filled with 150÷300 cm<sup>3</sup> [9.15÷18.3 in<sup>3</sup>] mineral oil HLP (DIN 51524) or HM (ISO 6743/4).



## HYDRAULIC DISC BRAKES FOR FLANGE ATTACHMENT TO MVS HYDRAULIC MOTORS

### Type LBS/313

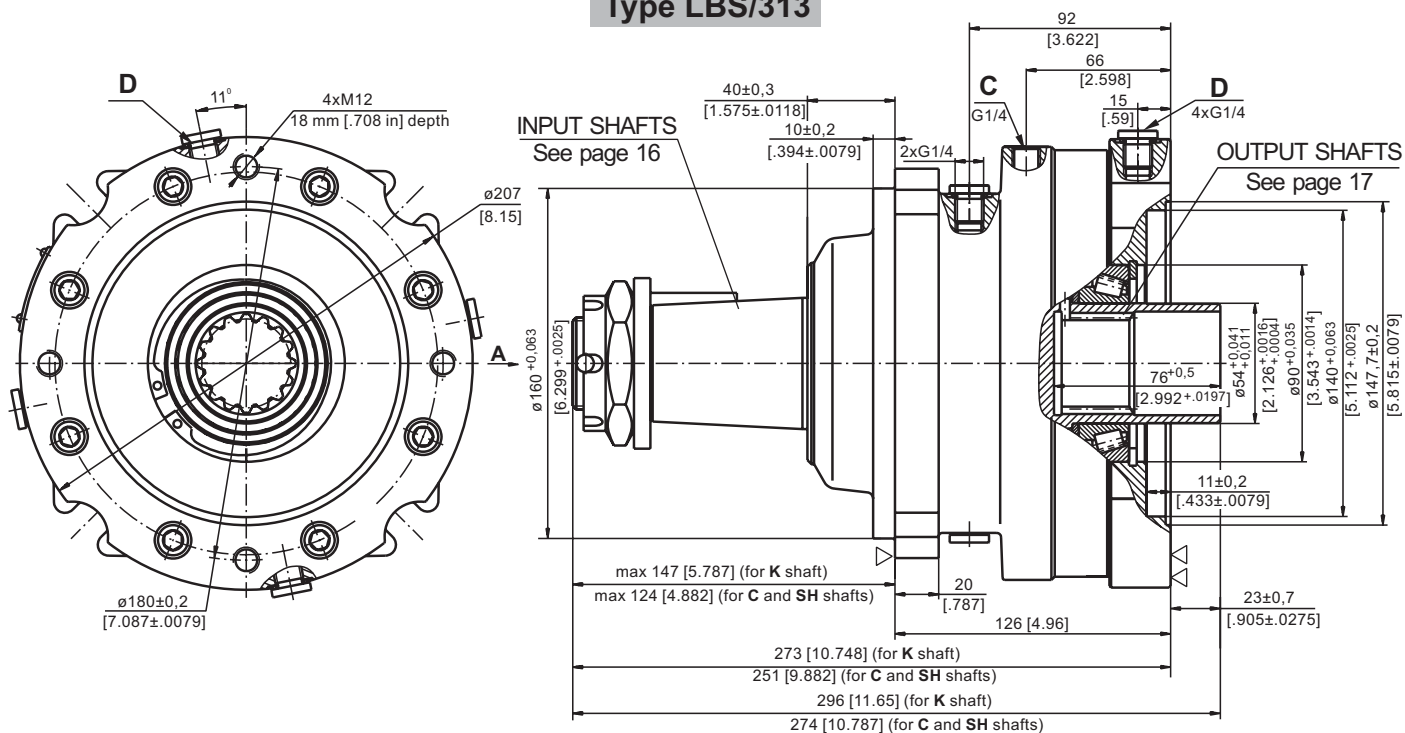


**C** : Brake release Port - G $\frac{1}{4}$ , 12 mm [.47 in] depth


**D** : Drainage tap - G $\frac{1}{4}$ , 12 mm [.47 in] depth

▽- Place for attachment


▽▽- Place for attachment  
(tightening torque for screw M12x35 - 8.8 DIN 912,  
7 daNm [620 lb-in])



mm [in]

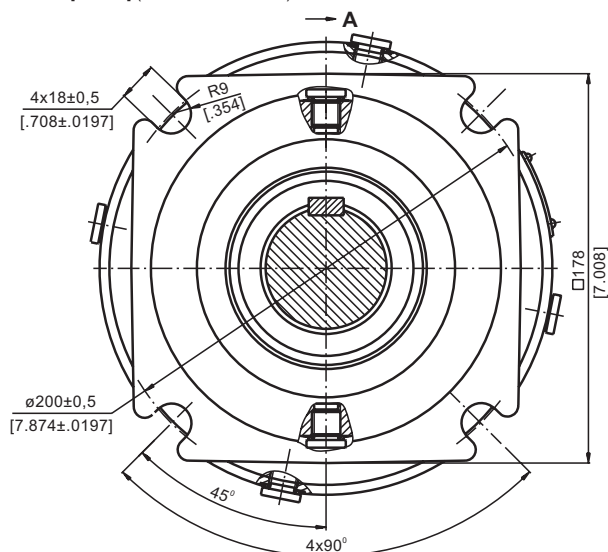


### PERMISSIBLE SHAFT LOADS

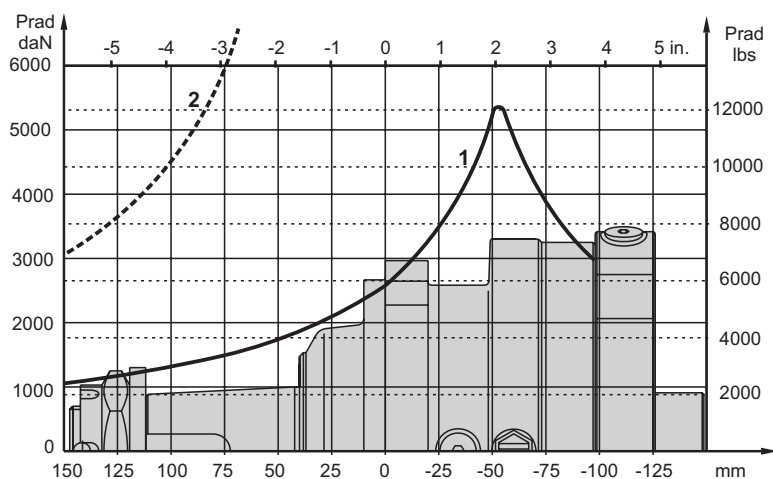

- 1 - Bearing curve:** The curve applies to a B10 bearing life of 3000 hours at 200 RPM.
- 2 - Shaft curve:** The curve represents Max. permissible radial shaft load with safety factor 3:1.

## HYDRAULIC DISC BRAKES FOR FLANGE ATTACHMENT TO MVS HYDRAULIC MOTORS

### Type LBS/316

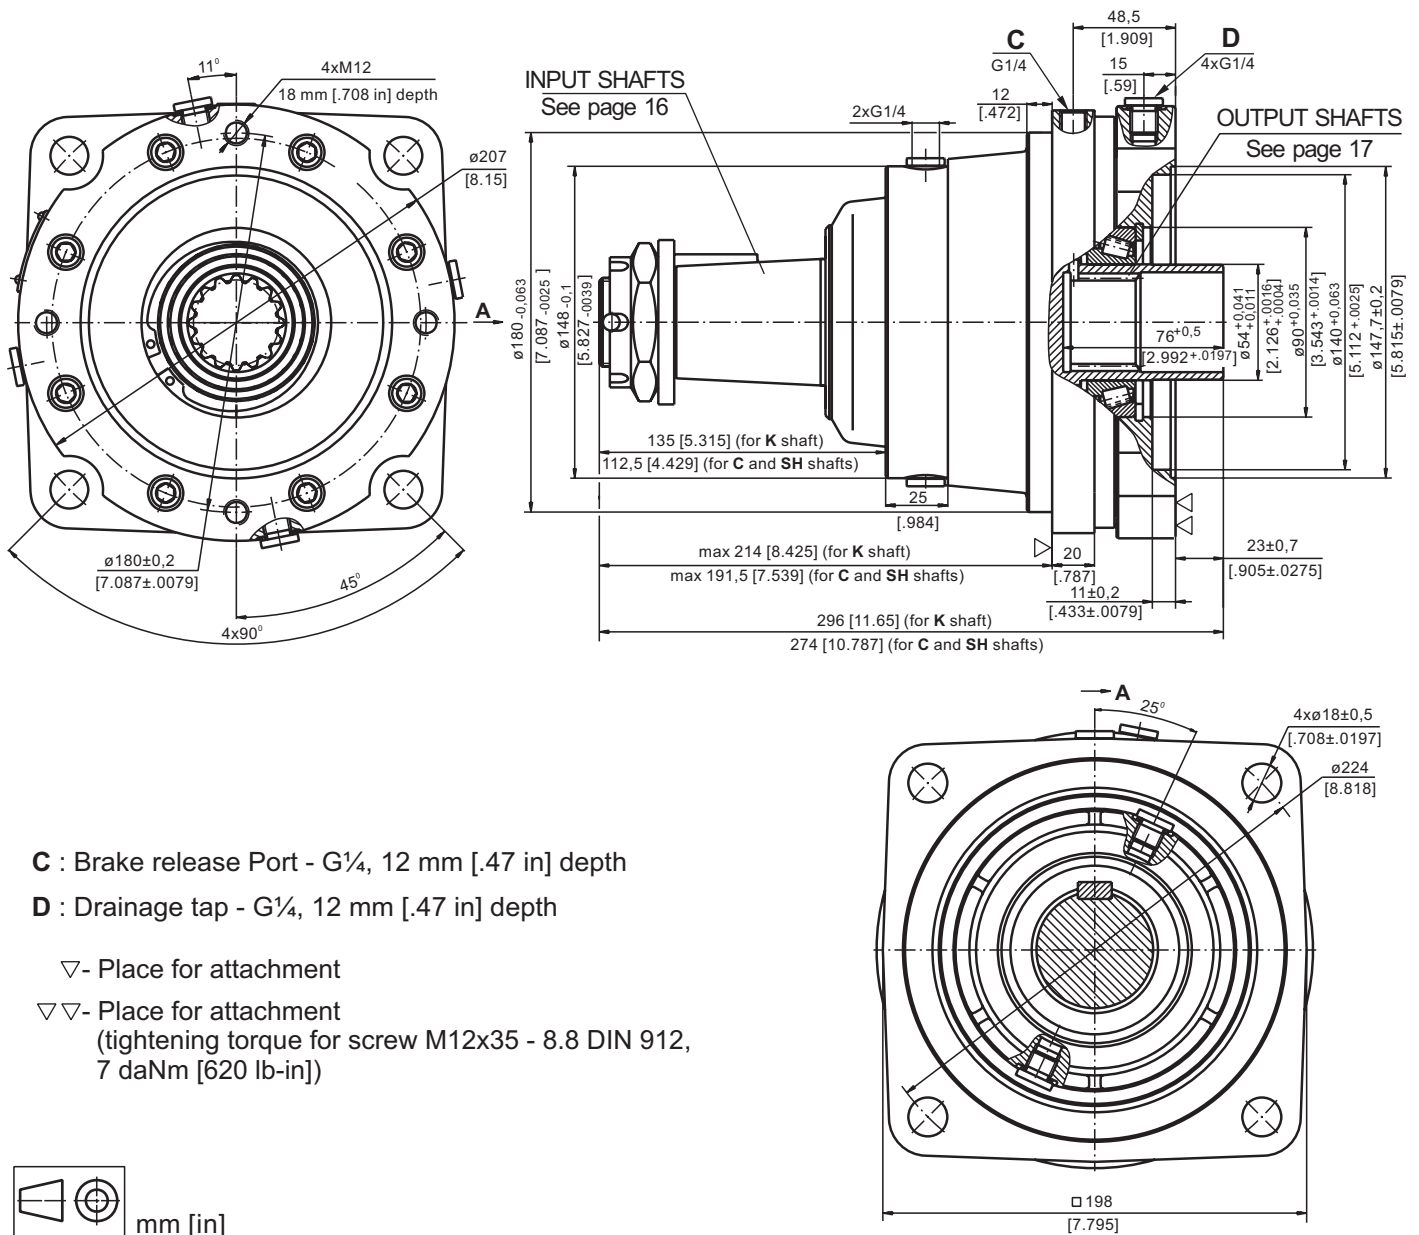

## SPECIFICATION DATA

Description LBS/313,316	21	29	43	65	85	110	130
*Min. Static Torque, daNm [lb-in]	18-23 [1593-2036]	28-33 [2478-2921]	42-47 [3717-4160]	61-71 [5399-6285]	83-94 [7346-8320]	108-118 [9559-10444]	127-137 [11240-12125]
Opening Pressure min** bar [PSI]	4-5 [58-72]	6-7 [87-101]	9-10 [130-145]	13-15 [188-217]	18-20 [261-290]	23-25 [333-362]	27-29 [391-420]
	max 300 [4350]						
Min. oil quantity for brake releasing cm <sup>3</sup> [in <sup>3</sup> ]	8 ÷ 9 [.488 ÷ .549]						
Oil volume cm <sup>3</sup> [in <sup>3</sup> ]	250 [15.25]						
Max. Pressure in drain space bar [PSI]	5 [72]						

\*Static torque is obtained at working pressure - 0 bar.



\*\*The indicated value is a difference between the inlet pressure for driving of the brake and the drain pressure.

Brakes must always have a drain line



## SHAFT EXTENSIONS

**C** - ø50 straight, Parallel key A14x9x70 DIN 6885

**SH** -ø2 1/8" splined, 16 DP 8/16 ANS B92.1-1976

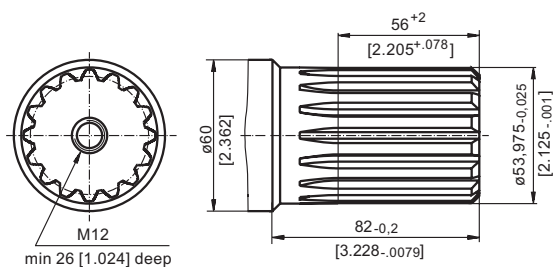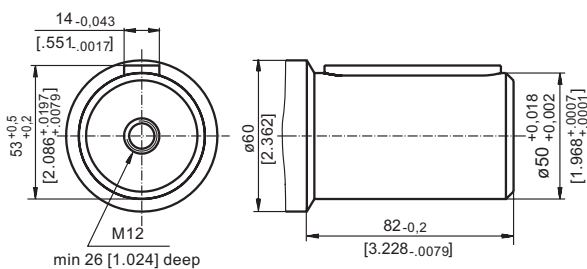

**K** -tapered 1:10, Parallel key B16x10x32 DIN 6885

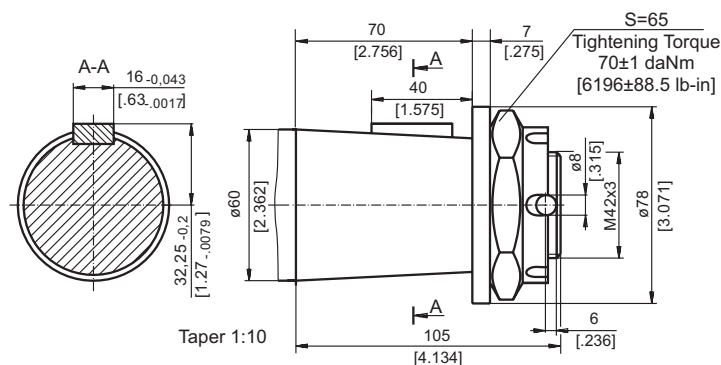


mm [in]

## INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANSI B92.1-1970, class 5  
[ $m=2.54$ ; corrected  $x.m=+1,0$ ]

Fillet Root Side Fit		mm	inch
Number of Teeth	z	16	16
Diametral Pitch	DP	10/20	10/20
Pressure Angle		30°	30°
Pitch Dia.	D	40,640	1.6
Major Dia.	D <sub>ri</sub>	45,2 <sup>+0,4</sup>	1.796÷1.780
Minor Dia.	D <sub>i</sub>	38,5 <sup>+0,039</sup>	1.5175÷1.516
Space Width [Circular]	Lo	5,18±0,037	.2055÷.2025
Fillet Radius	R	0,4	.015
Max. Measurement between Pins	L	32,47 <sup>+0,15</sup>	1.284÷1.278
Pin Dia.	d	5,6±0,001	.22051÷.22043

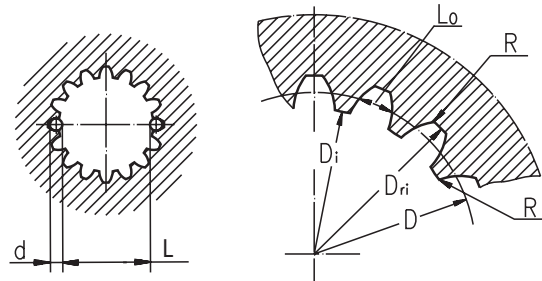

Hardening Specification:  
HV=750±50 on the surface.  
HV=560 at 0,7±0,2 mm [.035±.019in] case depth  
Material: 20 MoCr4 EN 10084 or better.

## ORDER CODE

	1		2	3	4	5
LBS/		-				

## Pos.1 - Designe code

- 313** - for MVS Motors  
**316** - for MVS Motors (Wheel mount)

## Pos.2 - Static Torque code (See Specification data)

21, 29, 43, 65, 85, 110, 130

## Pos.3 - Output Shaft Extensions\*

- C** - ø50 straight, Parallel key A14x9x70 DIN6885  
**SH** - ø2 1/8" splined, ANSI B92.1-1976  
**K** - ø60 tapered 1:10, Parallel key B16x10x32 DIN6885

## Pos.4 - Option (Paint)\*\*

- omit - no Paint  
**P** - Painted  
**PC** - Corrosion Protected Paint

## Pos.5 - Design Series

- omit - Factory specified

## NOTES:

- \* The permissible output torque for shafts must be not exceeded!  
\*\* The color is by customer's request.

The Disc Brakes are mangano-phosphatized as standard.


## ATTENTION:

- Hydraulic brake is delivered without oil ( it is lubricated only).
- In all brakes, friction discs and separators should be lubricated. Space is filled with 150 ÷ 300 cm<sup>3</sup> [9.15 ÷ 18.3 in<sup>3</sup>] mineral oil HLP (DIN 51524) or HM (ISO 6743/4).

# HYDRAULIC DISC BRAKES B...R- Wet

B...R brake is designed to be mounted to the wheels of low-speed agricultural and construction vehicles.

The advantage of these brakes is that despite the smallest possible dimensions they preserve long-term life of the bearings at high radial shaft load.



## SPECIFICATION DATA


Type	B35R	B55R
Static Torque of Brake, daNm [lb-in]*	35 [3100]	55 [4870]
Initial Release Pressure, bar [PSI]	16 [232]	16 [232]
Full Release Pressure, bar [PSI]	19 [275]	19 [275]
Max. Operating Pressure, bar [PSI]	240 [3480]	240 [3480]
Max. Speed, RPM	90	90
Cont. Radial Shaft Load daN [lbs]**	500 [1125]	500 [1125]
Max. Radial Shaft Load daN [lbs]***	700 [1575]	900 [2030]

\* At 0 bar [0 PSI] back pressure

\*\* At radial shaft load of 500 daN [1125 lbs], applied at center-line of the key and speed of rotation 90 RPM, the bearing life is 1000 hours.

\*\*\* The permissible values of radial shaft load may occur for max. 10% of every minute

## DIMENSIONS AND MOUNTING DATA

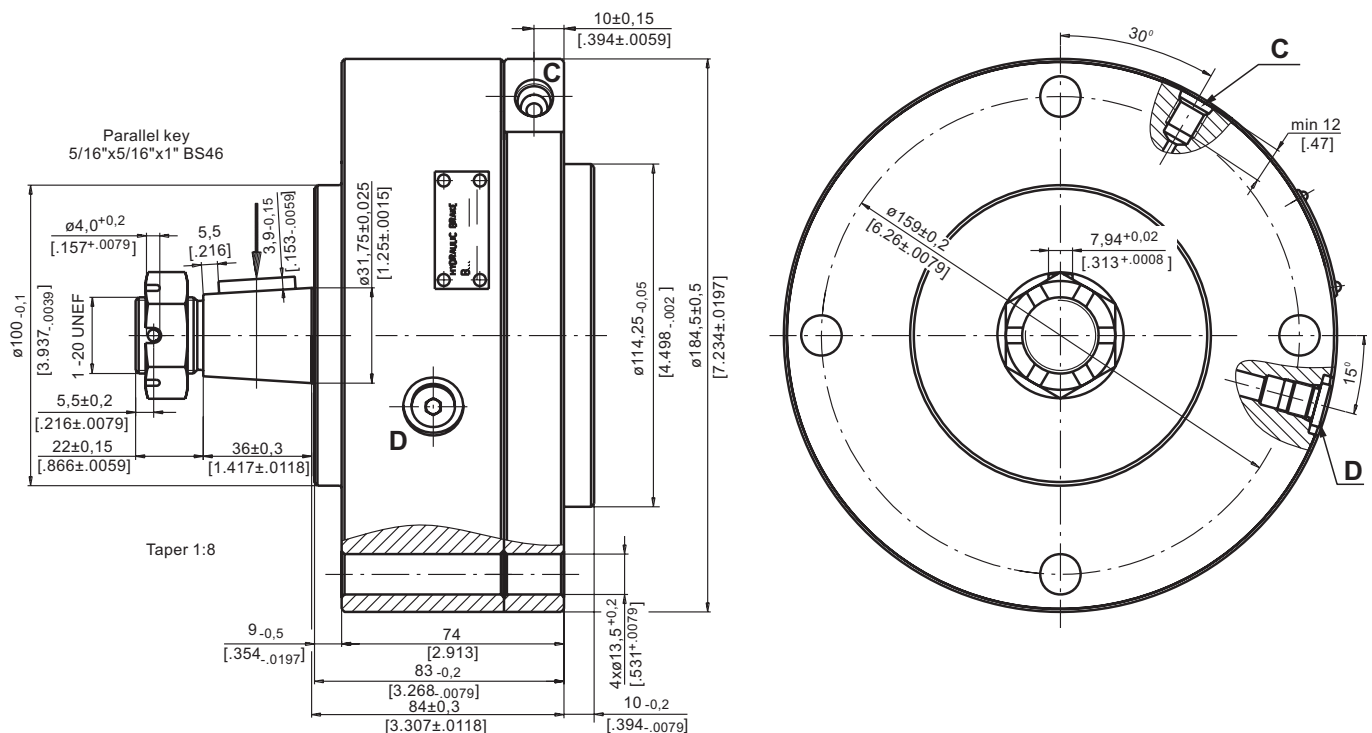

**C** : Brake Release Port -7/16-20 UNF  
SAE J1926-1/ISO 11926-1

**D** : Drainage Tap - 7/16-20 UNF




mm [in]



# HYDRAULIC DISC BRAKES B...T- Wet

B..T brake is designed to be mounted to the wheels of low-speed agricultural and construction vehicles.

The advantage of these brakes is that despite the smallest possible dimensions they preserve long-term life of the bearings at high radial shaft load.



## SPECIFICATION DATA


Type	B50T	B55T	B60T	B65T	B85T
Static Torque of Brake, daNm [lb-in]*	50 [4425]	55 [4870]	60 [5310]	65 [5750]	85 [7525]
Initial Release Pressure, bar [PSI]	16 [232]	16 [232]	16 [232]	17 [246]	18 [260]
Full Release Pressure, bar [PSI]	19 [275]	19 [275]	19 [275]	20 [290]	22 [320]
Max. Operating Pressure, bar [PSI]	240 [3480]	240 [3480]	240 [3480]	240 [3480]	240 [3480]
Max. Speed, RPM	60	60	60	60	60
Cont. Radial Shaft Load daN [lbs]**	1000 [2250]	1000 [2250]	1000 [2250]	1000 [2250]	1500 [3370]
Max. Radial Shaft Load daN [lbs]***	2150 [4830]	2150 [4830]	2150 [4830]	2150 [4830]	2250 [5060]

\* At 0 bar [0 PSI] back pressure

\*\* At radial shaft load of 1000 daN [2250 lbs], applied at center-line of the key and speed of rotation 60 RPM, the bearing life is 1000 hours.

\*\*\* The permissible values of radial shaft load may occur for max. 10% of every minute

## DIMENSIONS AND MOUNTING DATA

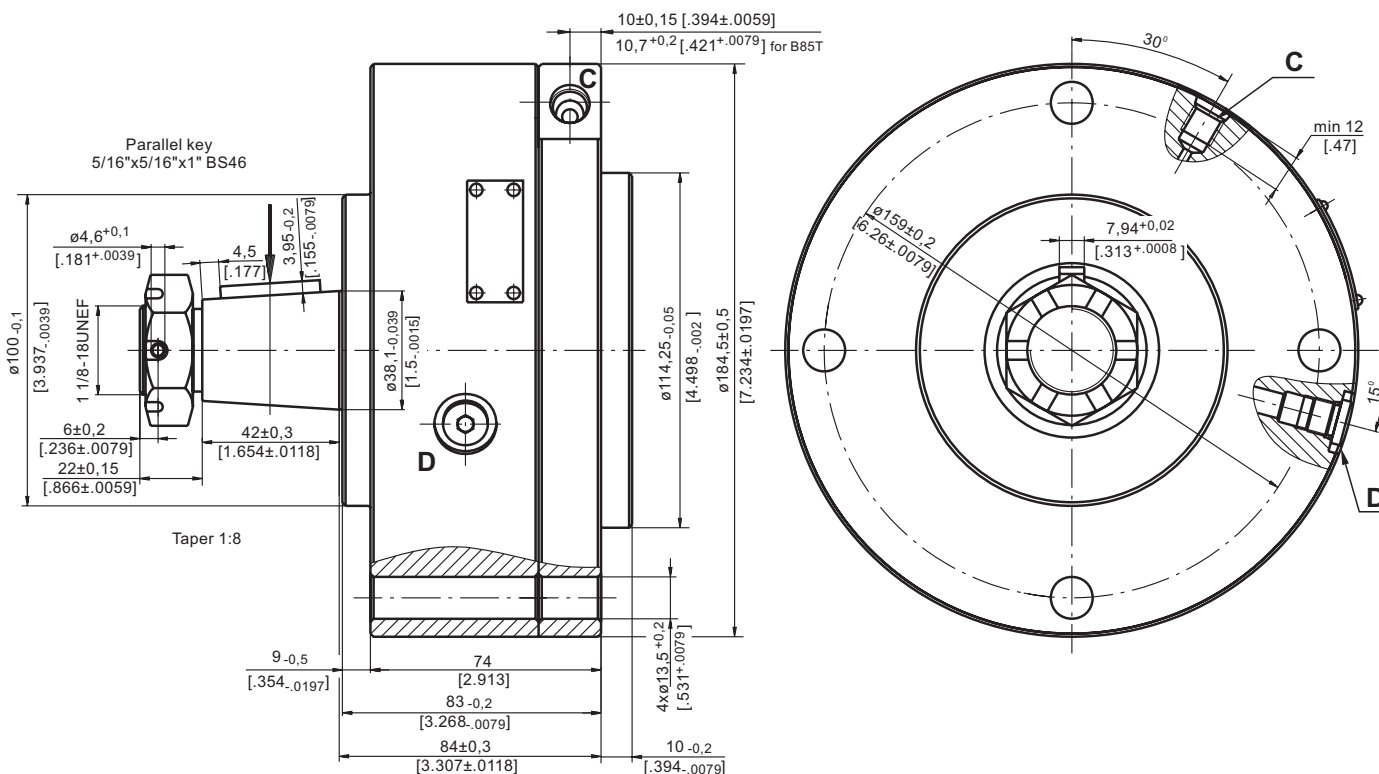

C : Brake Release Port - 7/16-20 UNF  
SAE J1926-1/ISO 11926-1

D : Drainage Tap - 7/16-20 UNF






# HYDRAULIC MOTOR-BRAKE B/MR




## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agriculture machines
- » Food industries
- » Mining machinery etc.



## CONTENTS

Specification data .....	22÷23
Dimensions and mounting ....	24÷25
Shaft extensions .....	25
Permissible shaft loads .....	26
Order code .....	26



## OPTIONS

- » Model- Spool valve, roll-gerotor;
- » Fully integrated friction disk brake;
- » Side port;
- » Shaft - straight;
- » BSPP ports.


## GENERAL

<b>Max. Displacement,</b> cm <sup>3</sup> /rev [in <sup>3</sup> /rev]	397 [24.4]
<b>Max. Speed,</b> [RPM]	600
<b>Max. Torque,</b> daNm [lb-in]	cont.: 61 [5400] int.: 57 [5045]
<b>Max. Output,</b> kW [HP]	14,5 [19.5]
<b>Max. Pressure Drop,</b> bar [PSI]	cont.: 175 [2540] int.: 200 [2900]
<b>Max. Oil Flow,</b> lpm [GPM]	75 [19.8]
<b>Min. Speed,</b> [RPM]	10
<b>Permissible Shaft Loads,</b> daN [lb-in]	P <sub>a</sub> =200 [450]
<b>Pressure fluid</b>	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °C [°F]	-40÷140 [-40÷284]
<b>Optimal Viscosity range,</b> mm <sup>2</sup> /s [SUS]	20÷75 [98÷347]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm <sup>2</sup> /s [SUS]	Oil flow in drain line lpm [GPM]
100 [1450]	20 [98]	2,5 [.660]
	35 [164]	1,8 [.476]
140 [2030]	20 [98]	3,5 [.925]
	35 [164]	2,8 [.740]

### Pressure Losses

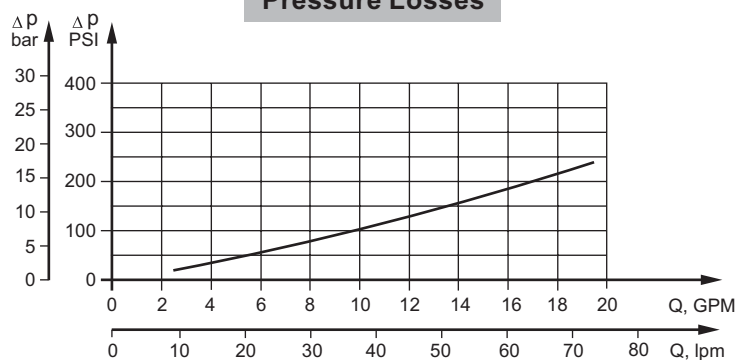

## SPECIFICATION DATA

Type		B/MR 80	B/MR 100	B/MR 125	B/MR 160	B/MR 160 CB	B/MR 200	B/MR 200 CB
Displacement, cm³/rev [in³/rev ]		80,3 [4.90]	99,8 [6.09]	125,7 [7.67]	159,6 [9.74]		199,8 [12.19]	
Max. Speed, [RPM]	Cont.	500	500	475	375		300	
	Int.*	600	600	600	470		375	
Max. Torque daNm [lb-in]	Cont.	19,5[1725]	24[2125]	30[2655]	30[2655]	39[3450]	30[2655]	45[3980]
	Int.*	22[1947]	28[2480]	34[3010]	39[3450]	43[3805]	39[3450]	50[4425]
	Peak**	27[2390]	32[2832]	37[3275]	46[4070]	46[4070]	56[4960]	56[4955]
Max. Output kW [HP ]	Cont.	8,4[11.2]	10,8[14.5]	12,5[16.8]	10 [13.5]	11,5[11.5]	7,8[10.5]	11[14.75]
	Int.*	9,6[12.9]	12[16.1]	14,5[19.5]	12,5[16.8]	14[18.8]	12,4[16.6]	13[17.4]
Max. Pressure Drop, bar [PSI]	Cont.	175[2540]	175[2540]	175[2540]	135[1960]	175[2540]	105[1523]	175[2540]
	Int.*	200[2900]	200[2900]	200[2900]	175[2540]	200[2900]	145[2103]	200[2900]
	Peak**	225[3263]	225[3263]	225[3263]	225[3263]	225[3263]	225[3263]	225[3263]
Max. Oil Flow l/min [GPM]	Cont.	40 [10.5]	50 [13.2]	60 [15.9]	60 [15.9]		60 [15.9]	
	Int.*	48 [12.7]	60 [15.9]	75 [19.8]	75 [19.8]		75 [19.8]	
Max. Inlet Pressure bar [PSI]	Cont.	175 [2540]						
	Int.*	200 [2900]						
	Peak**	225 [3260]						
Max. Starting Pressure bar [PSI]		10 [145]	10 [145]	9 [130]	7 [102]		5 [73]	
Min. Starting Torque, daNm [lb-in]	At max.press.drop Cont	15 [1330]	20 [1770]	25 [2215]	24 [2124]	32 [2832]	26 [2301]	41 [3628]
	At max.press.drop Int.*	17 [1505]	23 [2035]	28 [2480]	32 [2832]	37 [3275]	33 [2920]	46 [4071]
Min. Speed***, [RPM]		10	10	10	10	10	10	10
Static Torque of Brake, daNm [lb-in]		55 [4868]						
Min. Brake Release Pressure****, bar [PSI]		13 [190]						
Max.Opening Pressure, bar [PSI]		200 [2900]						
Weight, kg [lb]		11,0 [24.3]	11,2 [24.7]	11,4 [25.2]	11,6 [25.6]	11,7 [25.8]	12,2 [26.9]	12,3 [27.12]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\*\* Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.

- Intermittent speed and intermittent pressure must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM ( ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm<sup>2</sup>/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

### SPECIFICATION DATA (continued)

Type		B/MR 250	B/MR 250 CB	B/MR 315	B/MR 315 CB	B/MR 400	B/MR 400 CB
Displacement, cm <sup>3</sup> /rev [in <sup>3</sup> /rev ]		250,1 [15.26]		315,7 [19.26]		397 [24.4]	
Max. Speed, [RPM]	Cont.	240		190		150	
	Int.*	300		240		190	
Max. Torque daNm [lb-in]	Cont.	30 [2655]	54 [4780]	30 [2655]	55 [4868]	30 [2655]	55 [4868]
	Int.*	39 [3450]	57 [5045]	42 [3717]	57 [5045]	43 [3805]	57 [5045]
	Peak**	60 [5310]	71 [6285]	61 [5400]	71 [6285]	60 [5310]	70 [6195]
Max. Output kW [HP ]	Cont.	6,2 [8.3]	10 [13.4]	4,5 [6.1]	9 [12.1]	2,2 [2.9]	7 [9.4]
	Int.*	9,5 [12.7]	11 [14.7]	7,5 [10.1]	10 [13.4]	5,6 [7.5]	8,7 [11.7]
Max. Pressure Drop, bar [PSI]	Cont.	85 [1233]	175 [2538]	65 [942]	135 [1958]	45 [652]	105 [1523]
	Int.*	115 [1668]	185 [2683]	90 [1305]	145 [2103]	75 [1087]	115 [1668]
	Peak**	200 [2900]	225 [3263]	150 [2175]	180 [2610]	120 [1740]	140 [2030]
Max. Oil Flow l/min [GPM]	Cont.	60 [15.9]					
	Int.*	75 [19.8]					
Max. Inlet Pressure bar [PSI]	Cont.	175 [2540]					
	Int.*	200 [2900]					
	Peak**	225 [3260]					
Max. Starting Pressure bar [PSI]		5 [73]		5 [73]		5 [73]	
Min. Starting	At max.press.drop Cont	24 [2125]	50 [4425]	26 [2300]	50 [4425]	24 [2125]	44 [3895]
Torque, daNm [lb-in]	At max.press.drop Int.*	31 [2745]	51,5 [4560]	35 [3100]	51,8 [4585]	38 [3364]	50 [4425]
Min. Speed***, [RPM]		10	10	10	10	10	10
Static Torque of Brake, daNm [lb-in]		55 [4868]					
Min. Brake Release Pressure****, bar [PSI]		13 [190]					
Max.Opening Pressure, bar [PSI]		200 [2900]					
Weight, kg [lb]		12,6[27.8]	12,7 [28]	13,3[29.3]	13,4[29.5]	14 [30.9]	14,1[31.1]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.


\*\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\*\* Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.


- Intermittent speed and intermittent pressure must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM ( ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm<sup>2</sup>/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.




## DIMENSIONS AND MOUNTING DATA

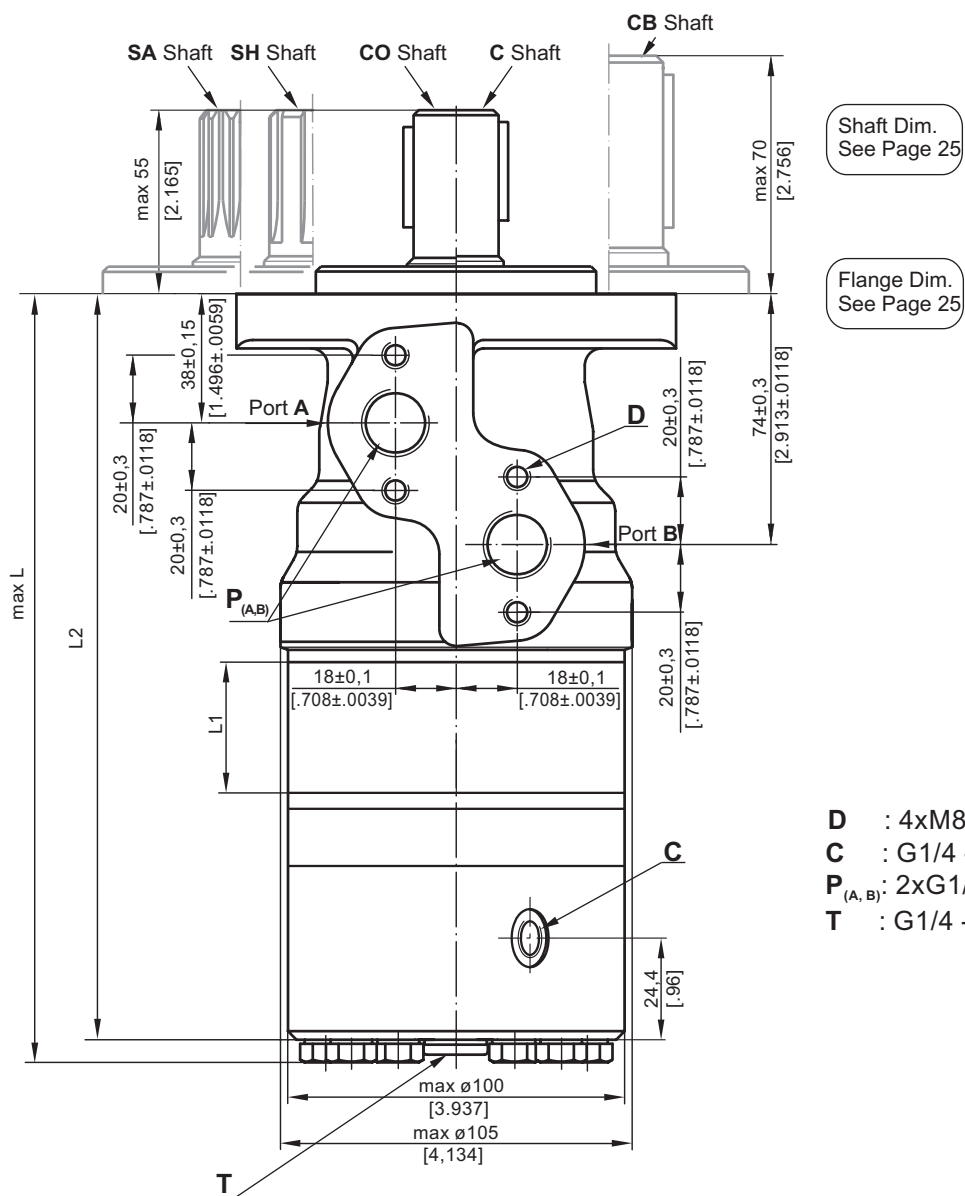

- D** : 4xM8 - 13 mm [.51 in] depth  
**C** : G1/4 - 12 [.47 in] mm depth  
**P<sub>(A,B)</sub>** : 2xG1/2 - 15 [.59 in] mm depth  
**T** : G1/4 - 10 mm [.393 in] depth

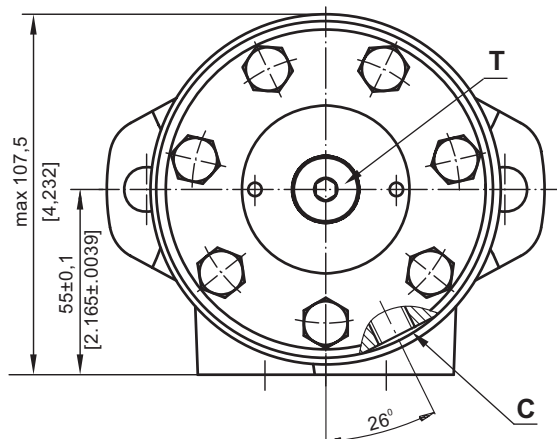

Type	L1, mm [in]	L2, mm [in]	L, mm [in]
B/MR 80	14,0 [.551]	205,5 [8.091]	213,5 [8.405]
B/MR 100	17,4 [.685]	209,0 [8.228]	217,0 [8.543]
B/MR 125	21,8 [.858]	213,5 [8.405]	221,5 [8.720]
B/MR 160	27,8 [1.095]	219,5 [8.642]	227,5 [8.957]
B/MR 200	34,8 [1.37]	226,5 [8.917]	234,5 [9.232]
B/MR 250	43,5 [1.713]	235,0 [9.252]	243,0 [9.567]
B/MR 315	54,8 [2.157]	246,5 [9.705]	254,5 [10.02]
B/MR 400	69,4 [2.732]	261,0 [10.275]	269,0 [10.59]




mm [in]

**Standard Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - **CW**  
 Port B Pressurized - **CCW**


**Reverse Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - **CCW**  
 Port B Pressurized - **CW**

## SHAFT EXTENSIONS


**C** -  $\varnothing 25$  straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 34 daNm [3010 lb-in]

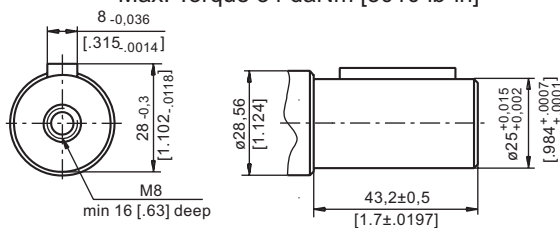


**CO** -  $\varnothing 1"$  straight, Parallel key  $\frac{1}{4}" \times \frac{1}{4}" \times 1\frac{1}{4}"$  BS46  
Max. Torque 34 daNm [3010 lb-in]

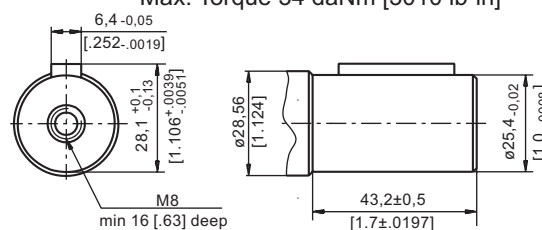


**SH** - splined, BS 2059 (SAE 6B)  
Max. Torque 40 daNm [3540 lb-in]

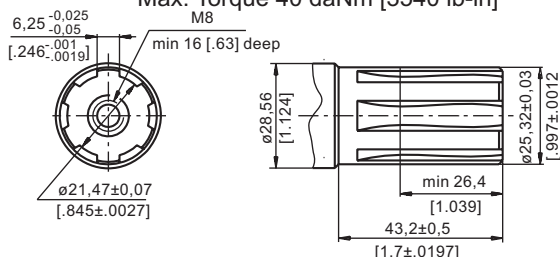

**SA** - splined, B25x22h9 DIN 5482  
Max. Torque 40 daNm [3540 lb-in]

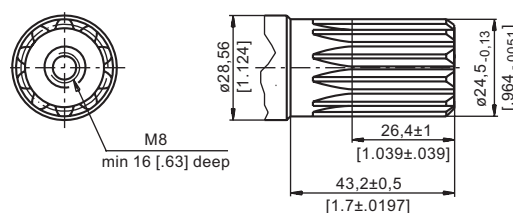


**CB** -  $\varnothing 32$  straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 77 daNm [6815 lb-in]


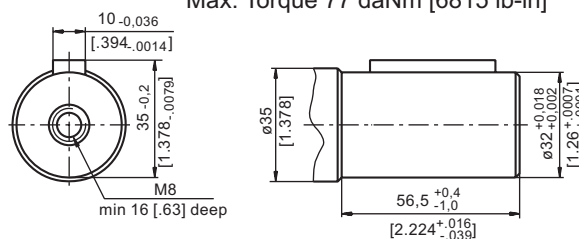


## MOUNTING

Oval Mount (2 Holes)

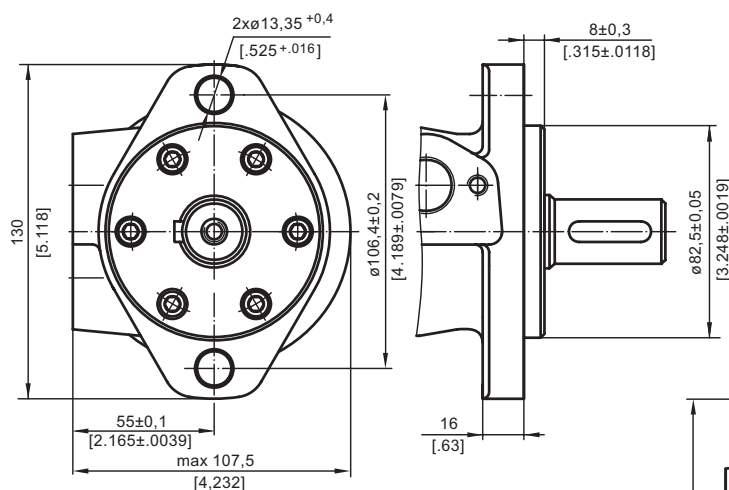



**F** - Oval Mount (4 Holes)

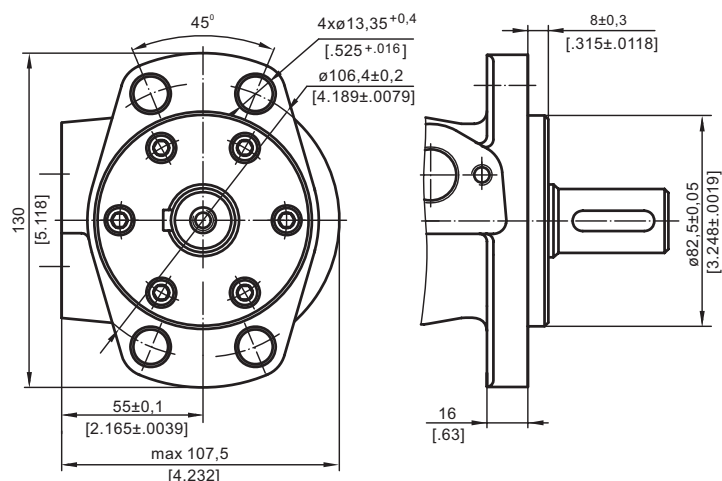

mm [in]

## PERMISSIBLE SHAFT LOADS



The permissible radial shaft load  $P_{rad}$  depends on the speed  $n$ , RPM, distance  $L$  from the point of load to the mounting flange and shaft version.

Mounting Flange		
Shaft Version	cylindrical - C, CO splined - SH, SA	cylindrical - CB
Radial Shaft Load $P_{rad}$ , in mm	$\frac{800}{n} \times \frac{25000}{95+L}$ , daN*	$\frac{800}{n} \times \frac{18750}{95+L}$ , daN*
Radial Shaft Load $P_{rad}$ , in inch	$\frac{800}{RPM} \times \frac{2215}{3.74+L}$ , lbs*	$\frac{800}{RPM} \times \frac{1660}{3.74+L}$ , lbs*

\*  $n \leq 200$  RPM; max  $P_{rad}$ =800 daN [1800 lbs]

$n \geq 200$  RPM;  $L < 55$  mm [2.2 in]

Radial Shaft Load  $P_{rad}$  for C, CO Shaft Extensions by  $L=30$  mm [1.18 in]

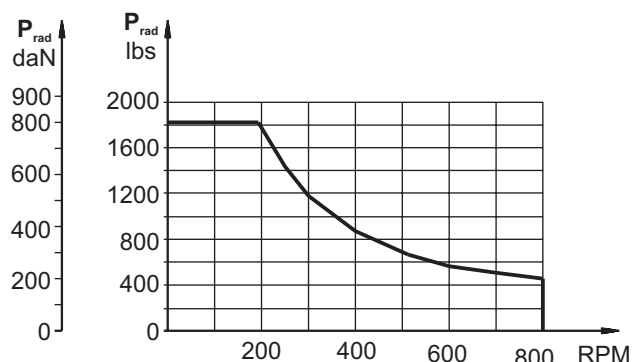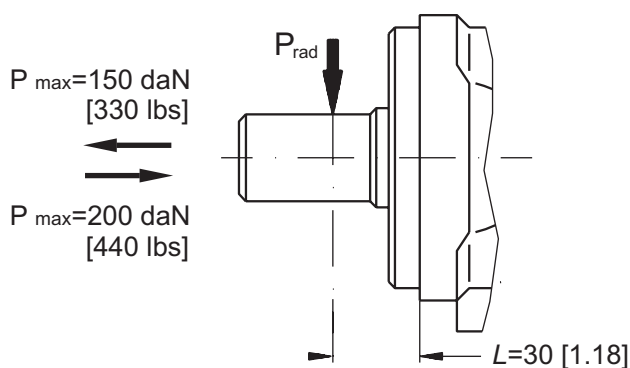

## ORDER CODE

	1	2	3	4	5
<b>B / M R</b>					

### Pos.1 - Mounting Flange

- omit - Oval mount, two holes  
**F** - Oval mount, four holes

### Pos.2 - Displacement code

<b>80</b>	- 80,3 cm <sup>3</sup> /rev [4.90 in <sup>3</sup> /rev]
<b>100</b>	- 99,8 cm <sup>3</sup> /rev [6.09 in <sup>3</sup> /rev]
<b>125</b>	- 125,7 cm <sup>3</sup> /rev [7.67 in <sup>3</sup> /rev]
<b>160</b>	- 159,6 cm <sup>3</sup> /rev [9.74 in <sup>3</sup> /rev]
<b>200</b>	- 199,8 cm <sup>3</sup> /rev [12.19 in <sup>3</sup> /rev]
<b>250</b>	- 250,1 cm <sup>3</sup> /rev [15.26 in <sup>3</sup> /rev]
<b>315</b>	- 315,7 cm <sup>3</sup> /rev [19.26 in <sup>3</sup> /rev]
<b>400</b>	- 397,0 cm <sup>3</sup> /rev [24.40 in <sup>3</sup> /rev]

### Pos.3 - Shaft Extensions\*

<b>C</b>	- ø25 straight, Parallel key A8x7x32 DIN6885
<b>CO</b>	- ø1" straight, Parallel key ¼"x¼"x1¼" BS46
<b>SH</b>	- ø25,32 splined BS 2059 (SAE 6B)
<b>SA</b>	- ø24,5 splined B 25x22 DIN 5482
<b>CB</b>	- ø32 straight, Parallel key A10x8x45 DIN 6885

### Pos.4 - Special Features (see page 59)

### Pos.5 - Design Series

- omit - Factory specified

## NOTES:


- \* The permissible output torque for shafts must be not exceeded!  
 The hydraulic motors are manganophosphatized as standard.

# HYDRAULIC MOTOR-BRAKE MT/B




## APPLICATION

- » Conveyors
- » Metal working machines
- » Agriculture machines
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles
- » Plastic and rubber machinery etc.



## CONTENTS

Specification data .....	28
Dimensions and mounting .....	29
Permissible shaft loads .....	29
Shaft extensions .....	30
Order code .....	30



## OPTIONS

- » Model- Disc valve, roll-gerotor;
- » Fully integrated friction disk brake;
- » Side ports;
- » Shafts- straight, splined and tapered;
- » BSPP ports
- » Other special features


## GENERAL

<b>Max. Displacement,</b> cm <sup>3</sup> /rev [in <sup>3</sup> /rev]	523,6 [31.95]
<b>Max. Speed,</b> [RPM]	780
<b>Max. Torque,</b> daNm [lb-in]	cont.: 122 [10780] int.: 137 [12125]
<b>Max. Output,</b> kW [HP]	40 [54]
<b>Max. Pressure Drop,</b> bar [PSI]	cont.: 200 [2900] int.: 240 [3450]
<b>Max. Oil Flow,</b> lpm [GPM]	150 [40]
<b>Min. Speed,</b> [RPM]	5
<b>Permissible Shaft Loads,</b> daN [lbs]	P <sub>a</sub> =1000 [2248]
<b>Pressure fluid</b>	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °C [°F]	-40÷140 [-40÷284]
<b>Optimal Viscosity range,</b> mm <sup>2</sup> /s [SUS]	20÷75 [98÷347]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm <sup>2</sup> /s [SUS]	Oil flow in drain line lpm [GPM]
140 [2030]	20 [98]	2,5 [.66]
	35 [164]	1,5 [.39]
210 [3045]	20 [98]	5 [1.32]
	35 [164]	3 [.79]

### Pressure Losses

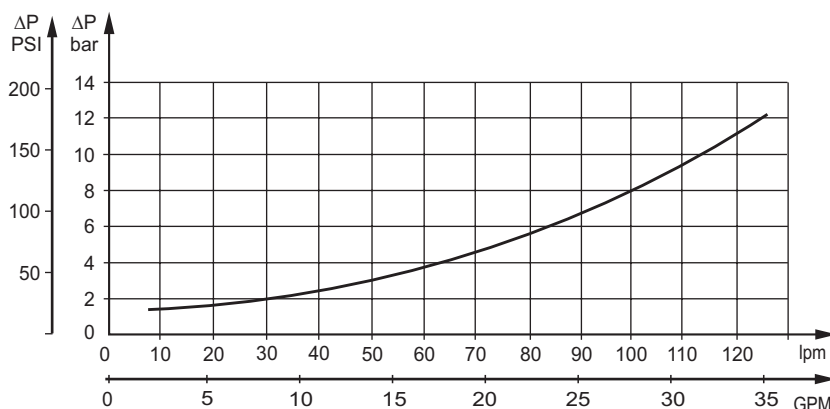

## SPECIFICATION DATA

Type		MT/B 160	MT/B 200	MT/B 250	MT/B 315	MT/B 400	MT/B 500
<b>Displacement, cm<sup>3</sup>/rev [in<sup>3</sup>/rev]</b>		161,1 [9.83]	201,4 [12.29]	251,8 [15.36]	326,3 [19.90]	410,9 [25.06]	523,6 [31.95]
<b>Max. Speed, [RPM]</b>	Cont.	625	625	500	380	305	240
	Int.*	780	750	600	460	365	285
<b>Max. Torque daNm [lb-in]</b>	Cont.	47 [4160]	59 [5220]	73 [6460]	95 [8410]	108 [9560]	122 [10800]
	Int.*	56 [4960]	71 [6285]	88 [7790]	114 [10090]	126 [11150]	137 [12125]
<b>Max. Output kW [HP]</b>	Cont.	26,5 [36]	33,5 [45]	33,5 [45]	33,5 [45]	30 [40]	26,5 [36]
	Int.*	32 [43]	40 [54]	40 [54]	40 [54]	35 [45]	30 [40]
<b>Max. Pressure Drop bar [PSI]</b>	Cont.	200 [2900]	200 [2900]	200 [2900]	200 [2900]	180 [2600]	160 [2300]
	Int.*	240 [3450]	240 [3450]	240 [3450]	240 [3450]	210 [3050]	180 [2600]
<b>Max. Oil Flow lpm [GPM]</b>	Cont.	100 [26.5]	125 [33]	125 [33]	125 [33]	125 [33]	125 [33]
	Int.*	125 [33]	150 [40]	150 [40]	150 [40]	150 [40]	150 [40]
<b>Max. Inlet Pressure bar [PSI]</b>	Cont.	210 [3050]	210 [3050]	210 [3050]	210 [3050]	210 [3050]	210 [3050]
	Int.*	250 [3600]	250 [3600]	250 [3600]	250 [3600]	250 [3600]	250 [3600]
<b>Max. Return Pressure with Drain Line, bar [PSI]</b>	Cont.	140 [2030]	140 [2030]	140 [2030]	140 [2030]	140 [2030]	140 [2030]
	Int.*	175 [2540]	175 [2540]	175 [2540]	175 [2540]	175 [2540]	175 [2540]
<b>Max. Starting Pressure with Unloaded Shaft, bar [PSI]</b>		10 [150]	10 [150]	10 [150]	10 [150]	10 [150]	10 [150]
<b>Min. Starting Torque daNm [lb-in]</b>	At max. press. drop Cont.	34 [3010]	43 [3800]	53 [4690]	74 [6550]	84 [7435]	95 [8410]
	At max. press. drop Int.*	41 [3630]	52 [4600]	63 [5580]	89 [7880]	97 [8585]	106 [9380]
<b>Min. Speed**, [RPM]</b>		10	9	8	7	6	5
<b>Static Torque of Brake, daNm [lb-in]</b>		143 [12657]	143 [12657]	143 [12657]	143 [12657]	143 [12657]	143 [12657]
<b>Min. Brake Release Pressure***, bar [PSI]</b>		32-35	32-35	32-35	32-35	32-35	32-35
		[2832-3098]	[2832-3098]	[2832-3098]	[2832-3098]	[2832-3098]	[2832-3098]
<b>Max. Opening Pressure, bar [PSI]</b>		280 [24782]	280 [24782]	280 [24782]	280 [24782]	280 [24782]	280 [24782]
<b>Max. Pressure in Drain Line, bar [PSI]</b>		5 [443]	5 [443]	5 [443]	5 [443]	5 [443]	5 [443]
<b>Weight, kg [lb]</b>		27,5 [60.6]	28 [61.7]	28,5 [62.8]	29,5 [65]	30,5 [67.2]	31,5 [69.4]




\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\* Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.


- Intermittent speed and intermittent pressure must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm<sup>2</sup>/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS AND MOUNTING DATA

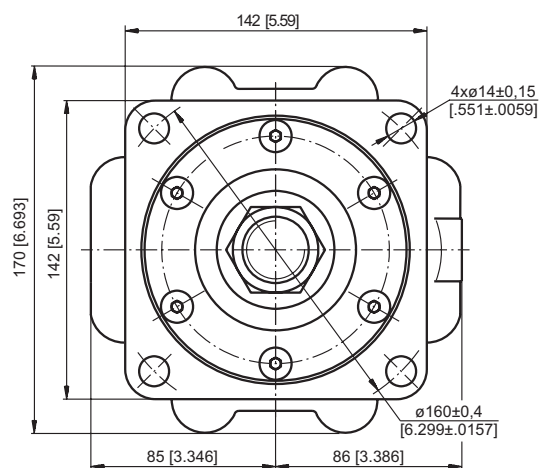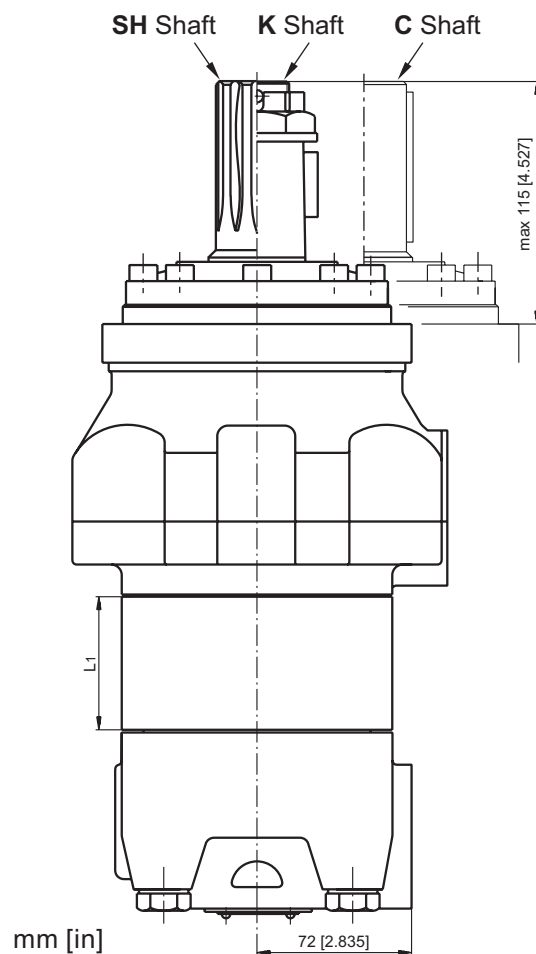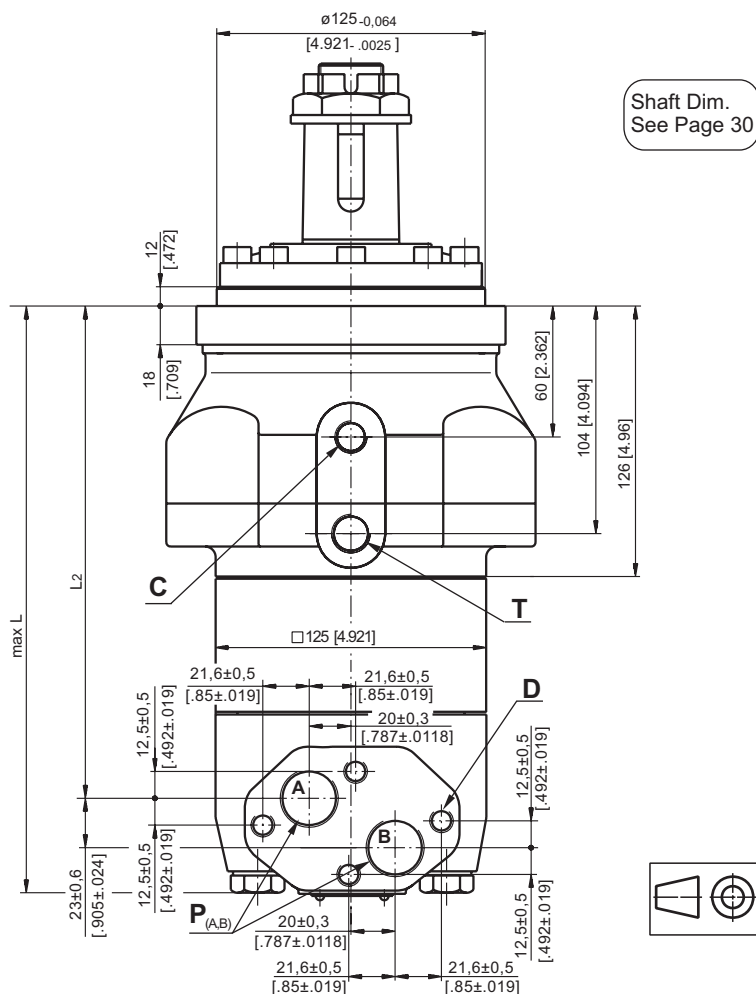

## PERMISSIBLE SHAFT LOADS

The curve applies to a B10 bearing life of 3000 hours at 200 RPM.

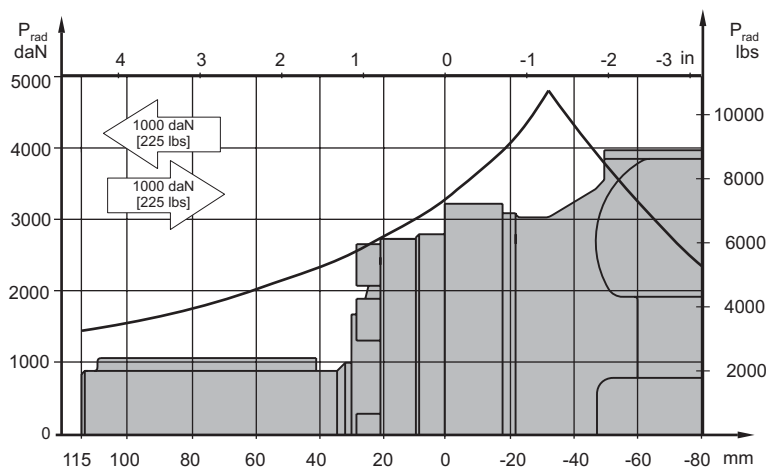

Warning: Drain line should always be used.

- P<sub>(A,B)</sub>** - 2xG3/4, 17 mm [.669] depth
- C** - Brake release port, G1/4, 12 mm [.472 in] depth
- T** - Drainage tap, G3/8, 13 mm [.512] depth
- D** - 2xM10, 10 mm [.394] depth


Type	*L1, mm [in]	L2, mm [in]	L, mm [in]
MT/B 160	16,5 [.65]	178 [7.01]	228 [8.98]
MT/B 200	21,5 [.85]	183 [7.21]	233 [9.17]
MT/B 250	27,8 [1.09]	189,3 [7.45]	239 [9.41]
MT/B 315	37,0 [1.46]	198,5 [7.81]	248 [9.76]
MT/B 400	47,5 [1.87]	209 [8.23]	259 [10.2]
MT/B 500	61,5 [2.42]	223 [8.78]	273 [10.8]

\* The width of the gerolator is 3,5 mm [.138 in] greater than L<sub>1</sub>.




## SHAFT EXTENSIONS


**C** -ø40 straight, Parallel key A12x8x70 DIN 6885  
Max. Torque 123 daNm [10886 lb-in]

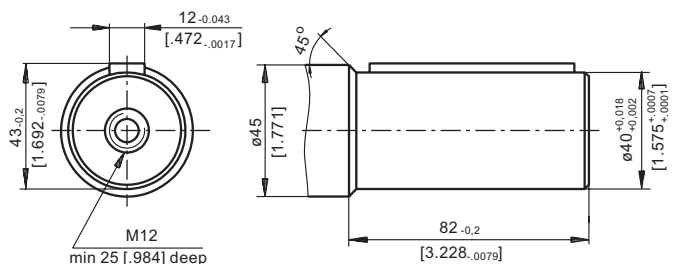

**SH** -ø1½" splined 17T, DP 12/24 ANSI B92.1-1976  
Max. Torque 123 daNm [10886 lb-in]

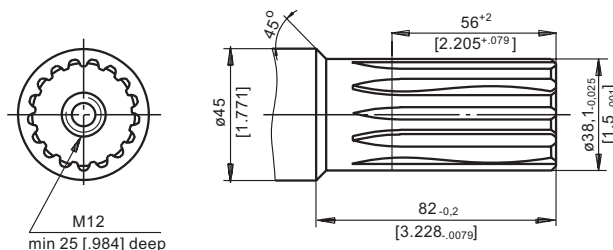

**K** -tapered 1:10, Parallel key B12x8x28 DIN 6885  
Max. Torque 210 daNm [18587 lb-in]

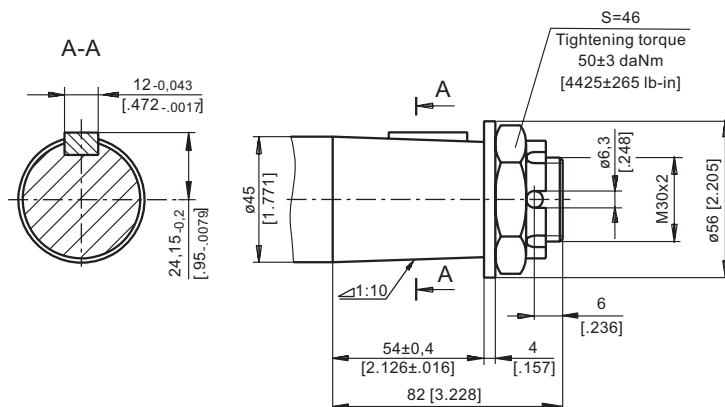**ORDER CODE**

	1	2	3	4
MT/B				

## Pos.1 - Displacement code

<b>160</b>	- 161,1 cm³/rev [9.83 in³/rev]
<b>200</b>	- 201,4 cm³/rev [12.29 in³/rev]
<b>250</b>	- 251,8 cm³/rev [15.36 in³/rev]
<b>315</b>	- 326,3 cm³/rev [19.9 in³/rev]
<b>400</b>	- 410,9 cm³/rev [25.06 in³/rev]
<b>500</b>	- 523,6 cm³/rev [31.95 in³/rev]

## Pos.2 - Shaft Extensions\*\*

<b>C</b>	- ø40 straight, Parallel key A12x8x70 DIN6885
<b>SH</b>	- ø1 ½" splined 17 DP12/24 ANS B922.1-76
<b>K</b>	- ø45 tapered 1:10, Parallel key B12x8x28 DIN 6885

Pos.3 - **Special Features** (see page 59)

## Pos.4 - Design Series

omit - Factory specified

**NOTES:**

\* The permissible output torque for shafts must be not exceeded!


The hydraulic motors are mangano phosphatized as standard.

# HYDRAULIC MOTOR-BRAKE MTM/B




## APPLICATION

- » Skid Steer Loaders
- » Metal working machines
- » Trenchers
- » Augers
- » Agriculture machines
- » Road building machines
- » Special vehicles
- » Mine machines
- » Woodworking and sawmill machinery
- » Conveyors etc.



## CONTENTS

Specification data .....	32
Dimensions and mounting .....	33
Shaft extensions .....	34
Permissible shaft loads .....	35
Order code .....	35



## OPTIONS

- » Model- Disc valve, roll-gerotor;
- » Fully integrated friction disk brake;
- » Side ports;
- » Shafts- straight, splined and tapered;
- » BSPP ports
- » Other special features


## GENERAL

<b>Max. Displacement,</b> cm <sup>3</sup> /rev [in <sup>3</sup> /rev]	724,3 [44.2]
<b>Max. Speed,</b> [RPM]	750
<b>Max. Torque,</b> daNm [in-lb]	cont.: 175 [15490] int.: 215 [16030]
<b>Max. Output,</b> kW [HP]	70 [94]
<b>Max. Pressure Drop,</b> bar [PSI]	cont.: 250 [3600] int.: 350 [5080]
<b>Max. Oil Flow,</b> lpm [GPM]	150 [40]
<b>Permissible Shaft Loads</b> daN [lbs]	P <sub>a</sub> =1000 [2250]
<b>Pressure fluid</b>	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °C [°F]	-40÷140 [-40÷284]
<b>Optimal Viscosity range,</b> mm <sup>2</sup> /s [SUS]	20÷75 [98÷347]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm <sup>2</sup> /s [SUS]	Oil flow in drain line lpm [GPM]
200 [2900]	20 [98]	2,5 [.660]
	35 [164]	1,5 [.400]
275 [3990]	20 [98]	4 [1.057]
	35 [164]	2,5 [.660]

### Pressure Losses

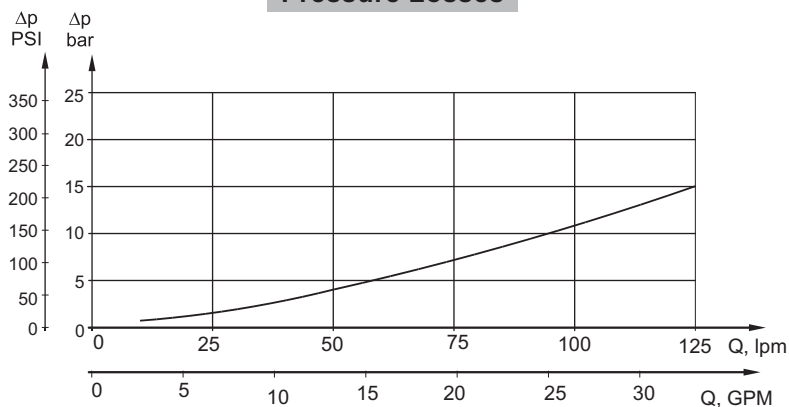

## SPECIFICATION DATA

Type		MTM/B 200	MTM/B 250	MTM/B 315	MTM/B 400	MTM/B 470	MTM/B 500	MTM/B 630	MTM 725
Displacement, cm <sup>3</sup> /rev [in <sup>3</sup> /rev]		201,4 [12.29]	251,8 [15.36]	326,3 [19.9]	410,9 [25.06]	475 [28.97]	494,9 [30.17]	631,2 [38.5]	724 [44.2]
Max. Speed, [RPM]	Cont.	625	500	380	305	260	250	196	170
	Int.*	750	600	460	365	315	300	235	215
Max. Torque, daNm [lb-in]	Cont.	72 [6375]	90 [7965]	116 [10265]	147 [13010]	171 [15135]	172 [15225]	175 [15490]	160 [14160]
	Int.*	102 [9030]	128 [11330]	163 [14425]	206 [18232]	215 [16030]	215 [16030]	215 [16030]	192 [17000]
	Peak**	115 [10180]	144 [12745]	186 [16460]	235 [20800]	240 [21240]	240 [21240]	255 [22570]	240 [21240]
Max. Output, kW [HP]	Cont.	41 [55]	41 [55]	41 [55]	41 [55]	41 [55]	37,5 [50]	29 [39]	26 [35]
	Int.*	65 [87]	70 [94]	70 [94]	70 [94]	55 [74]	51 [68]	45 [60]	40 [54]
Max. Pressure Drop, bar [PSI]	Cont.	250 [3600]	250 [3600]	250 [3600]	250 [3600]	250 [3600]	230 [3340]	185 [2680]	160 [2320]
	Int.*	350 [5080]	350 [5080]	350 [5080]	350 [5080]	315 [4570]	280 [4060]	225 [3260]	210 [3045]
	Peak**	400 [5800]	400 [5800]	400 [5800]	400 [5800]	350 [5080]	320 [4640]	270 [3985]	260 [3770]
Max. Oil Flow, lpm [GPM]	Cont.	125 [33]	125 [33]	125 [33]	125 [33]	125 [33]	125 [33]	125 [33]	125 [33]
	Int.*	150 [40]	150 [40]	150 [40]	150 [40]	150 [40]	150 [40]	150 [40]	150 [40]
Max. Starting Pressure with Unloaded Shaft, bar [PSI]		6 [87]	6 [87]	6 [87]	6 [87]	6 [87]	6 [87]	6 [87]	6 [87]
Min. Starting Torque, daNm [lb-in]		60 [5310]	75 [6640]	97 [8585]	122 [10800]	142 [12570]	143 [12655]	144 [12745]	148 [13100]
Static Torque of Brake, daNm [lb-in]		200 [17700]							
Min. Brake Release Pressure***, bar [PSI]		14 [203]							
Max. Opening Pressure, bar [PSI]		40 [580]							
Weight, kg [lb]		37,5 [82.7]	37,9 [83.6]	39,1 [86.2]	41,3 [91.1]	44,1 [97.2]	46,0 [101.4]	49,1 [108.2]	52,0 [114.6]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.


\*\*\*\* For speeds lower than given, consult factory or your regional manager.

- Intermittent speed and intermittent pressure drop must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
- Recommended maximum system operating temperature is 180°F [82°C].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS AND MOUNTING DATA

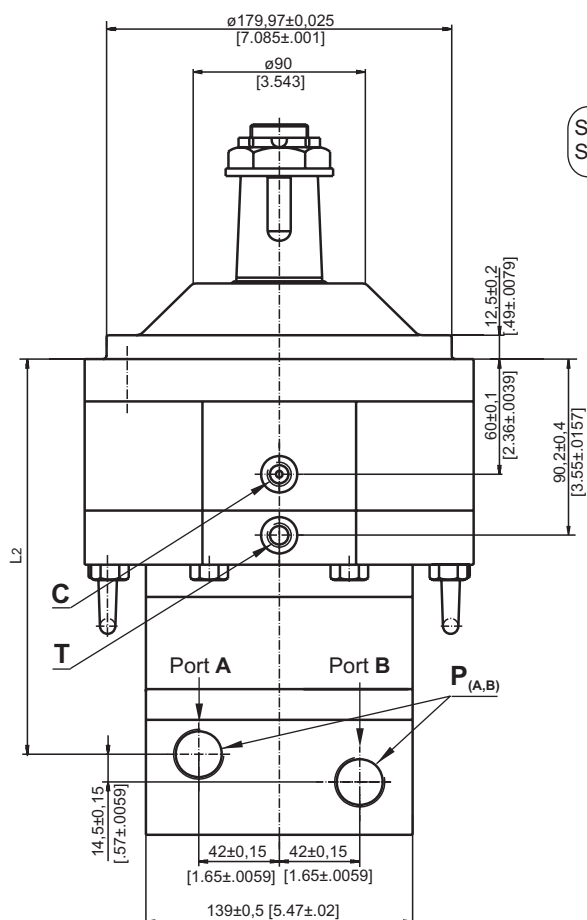

Shaft Dim.  
See Page 34

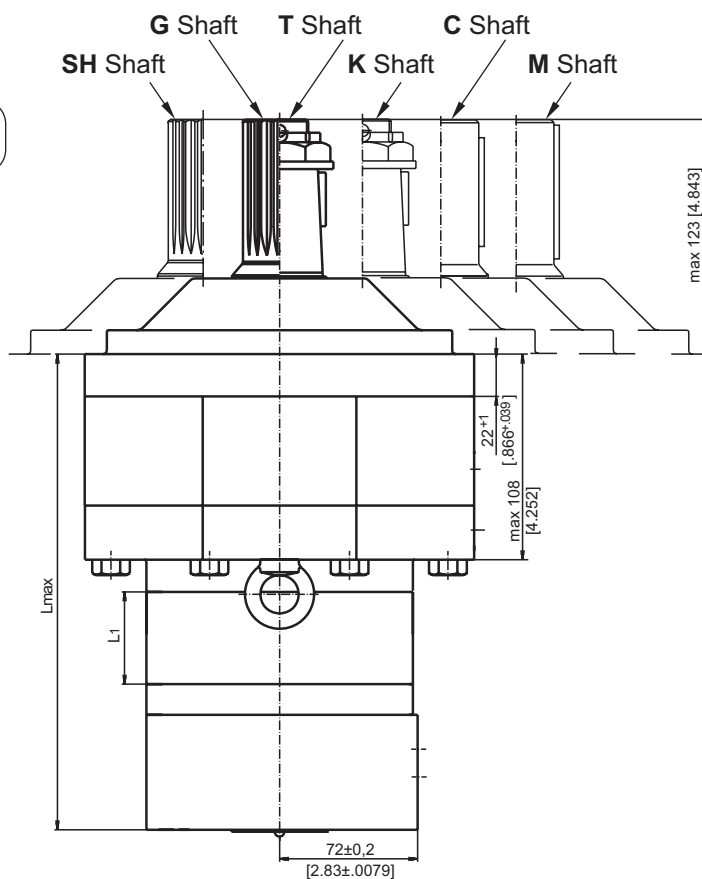


### Standard Rotation

Viewed from Shaft End  
Port A Pressurized - **CW**  
Port B Pressurized - **CCW**

### Reverse Rotation

Viewed from Shaft End  
Port A Pressurized - **CCW**  
Port B Pressurized - **CW**

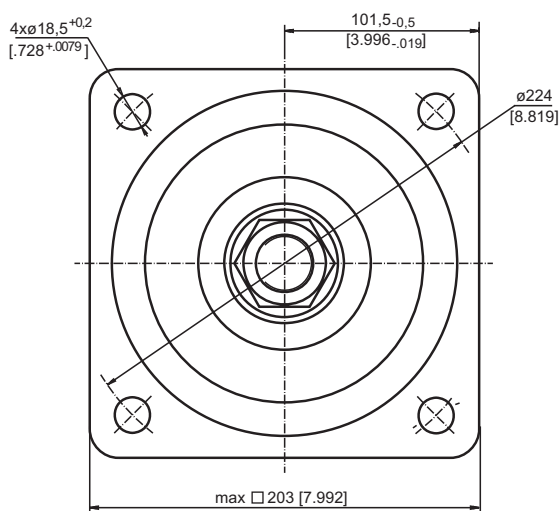


Type	L, mm [in]	L2, mm [in]	L1, mm [in]
MTM/B 200	226 [8.90]	184 [7.24]	25 [.98]
MTM/B 250	232,5 [9.15]	190 [7.48]	31,3 [1.23]
MTM/B 315	241,5 [9.51]	199,5 [7.85]	40,5 [1.59]
MTM/B 400	252 [9.92]	210 [8.27]	51 [2.01]
MTM/B 470	260 [10.24]	218 [8.58]	59 [2.32]
MTM/B 500	249 [9.80]	207 [8.15]	48 [1.89]
MTM/B 630	262 [10.32]	220 [8.66]	61 [2.40]
MTM/B 725	271 [10.67]	229 [9.02]	70 [2.76]

	Versions	
	2	4
P (A,B)	2xG $\frac{3}{4}$	2x1 $\frac{1}{16}$ -12UN
T	G $\frac{1}{4}$	$\frac{9}{16}$ -18 UNF
C	G $\frac{1}{4}$	$\frac{7}{16}$ -20 UNF

## SHAFT EXTENSIONS


**C**

1½" [38,1] straight, Parallel key ¾" x ¾" x 2¼" BS46  
Max. Torque 133 daNm [11750 lb-in]

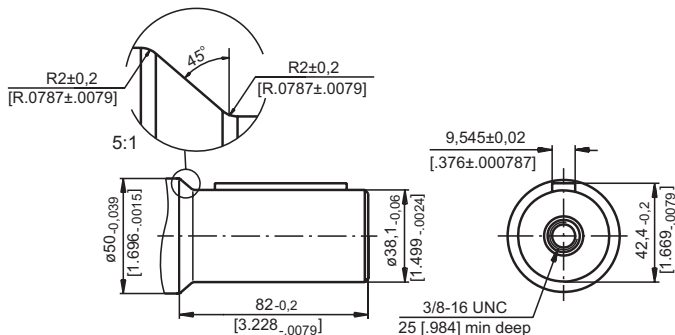


**M**

ø40 straight, Parallel key A12x8x70  
Max. Torque 133 daNm [11750 lb-in]

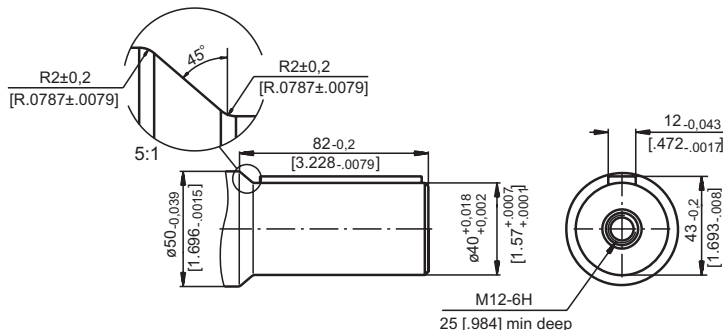


**G**

17T Splined, 1½" [38,1] ANS B92.1-1976  
Max. Torque 133 daNm [11750 lb-in]

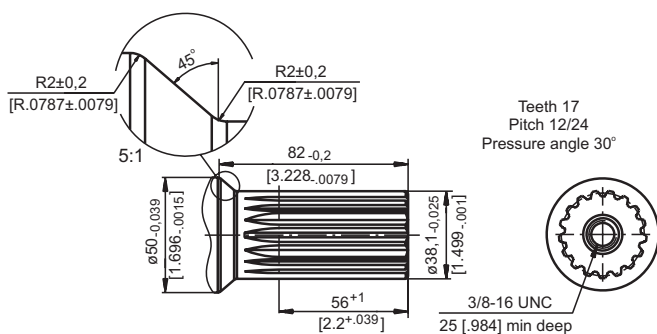


**T**

1 3/4" [44,5] SAE J501 Tapered 1:8  
Parallel key 7/16" x 7/16" x 1¼" BS46  
Max. Torque 210 daNm [18650 lb-in]

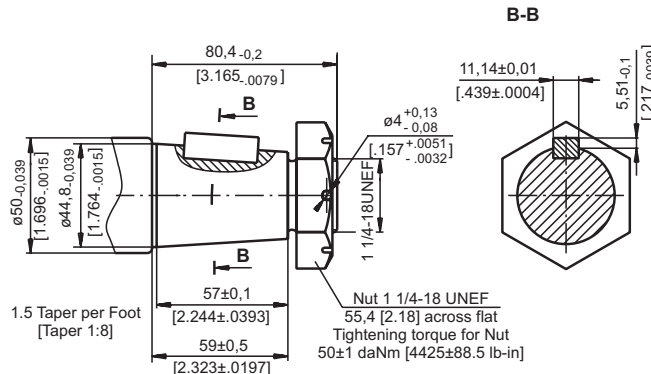


**SH**

17T Splined, 1½" [38,1] ANS B92.1-1976  
Max. Torque 133 daNm [11750 lb-in]

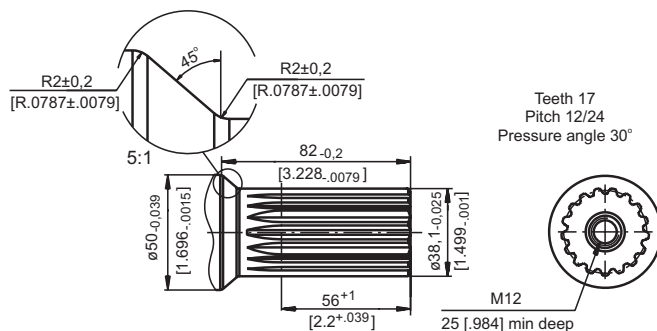


**K**

ø45 Tapered 1:10  
Parallel key 12x8x28 DIN 6885  
Max. Torque 211 daNm [18675 lb-in]

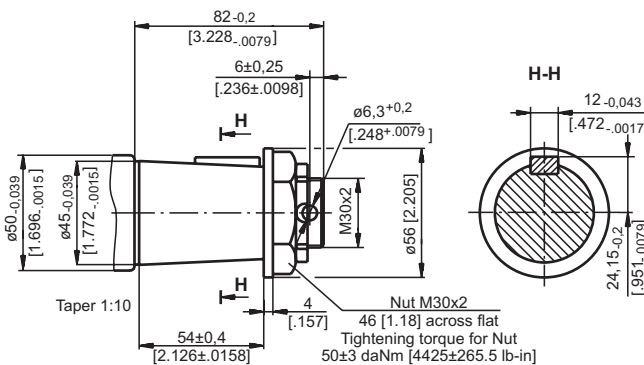

## PERMISSIBLE RADIAL SHAFT LOADS

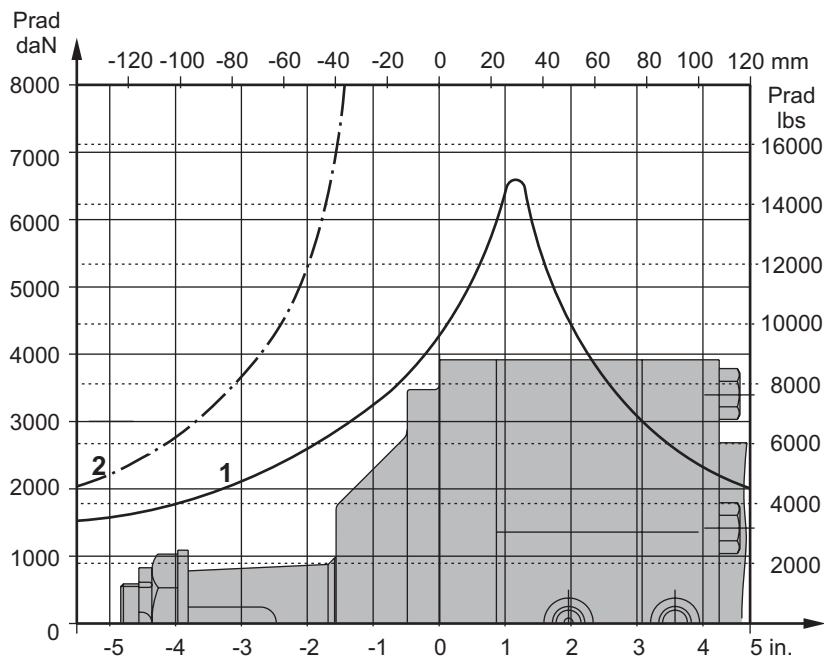

1 - Bearing curve: The curve applies to a B10 bearing life of 2000 hours at 100 RPM.

2 - Shaft curve: The curve represents Max. permissible radial shaft load with safety factor 2:1.

## ORDER CODE

	1	2	3	4	5
<b>MTM/B</b>					

### Pos.1 - Displacement code

<b>200</b>	- 201,4 cm <sup>3</sup> /rev [12.29 in <sup>3</sup> /rev]
<b>250</b>	- 251,8 cm <sup>3</sup> /rev [15.36 in <sup>3</sup> /rev]
<b>315</b>	- 326,3 cm <sup>3</sup> /rev [19.90 in <sup>3</sup> /rev]
<b>400</b>	- 410,9 cm <sup>3</sup> /rev [25.06 in <sup>3</sup> /rev]
<b>470</b>	- 475,0 cm <sup>3</sup> /rev [28.97 in <sup>3</sup> /rev]
<b>500</b>	- 523,6 cm <sup>3</sup> /rev [31.95 in <sup>3</sup> /rev]
<b>630</b>	- 631,2 cm <sup>3</sup> /rev [38.52 in <sup>3</sup> /rev]
<b>725</b>	- 724,3 cm <sup>3</sup> /rev [44.20 in <sup>3</sup> /rev]

### Pos. 3 - Ports

<b>2</b>	- side ports, 2xG 3/4, G1/4, BSP thread, ISO 228
<b>4</b>	- side ports, 2x 1 1/16-12 UN, O-ring, 9/16-18 UNF, 7/16-20UNF

### Pos. 4 - Special Features [\(see page 59\)](#)

### Pos. 5 - Design Series

omit - Factory specified

### Pos.2 - Shaft Extensions\*

<b>C</b>	- 1½" [38,1] straight, Parallel key 3/8x3/8x2 1/4"
<b>G</b>	- 1½" [38,1] 17T Splined (3/8-16 UNC)
<b>M</b>	- 40 mm straight, Parallel key 12x8x70
<b>T</b>	- 1:8 Tapered, Parallel key 7/16x7/16x1 1/4"
<b>SH</b>	- 1½" [38,1] 17T Splined (M12)
<b>K</b>	- 1:10 Tapered, Parallel key 12x8x28

**Notes:** \* The permissible output torque for shafts must be not exceeded!

\*\* Color at customer's request.

The hydraulic motors are mangano phosphatized as standard.




# HYDRAULIC MOTOR-BRAKES SW500B350V




## APPLICATION

- » Wheel drives
- » Conveyors
- » Rotators
- » Positioners
- » Winches
- » Swing drives
- » Door openers



## CONTENTS

Specification data .....	36
Dimensions and mounting .....	37
Permissible shaft loads .....	37
Function diagrams .....	38

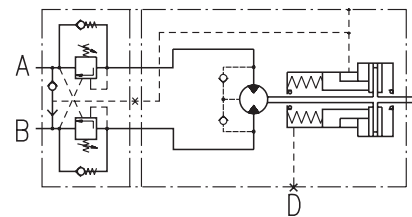

## SPECIFICATION DATA



Type		SW500B350V
Displacement, cm <sup>3</sup> /rev [in <sup>3</sup> /rev]		475,3 [29]
Max. Speed, RPM	Cont.	16
	Int.*	25
Max. Torque, daNm [in-lb]	Cont.	82 [7260]
	Int.*	95 [8420]
Max. Output, kW [HP]	Cont.	0,9 [1.3]
	Int.*	2,4 [3.3]
Max. Pressure Drop, bar [PSI]	Cont.	125 [1800]
	Int.*	145 [2100]
Max. Oil Flow, lpm [GPM]	Cont.	8 [2]
	Int.*	12 [3]
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, bar [PSI]		100 [1450]
Min. Starting Torque, daNm [in-lb]	At max. press. drop Cont.	72 [6400]
	At max. press. drop Int.*	75 [6650]
Min. Speed**, RPM		5
Static Torque for the Brake***, daNm [in-lb]		164 [14 515]
Release Pressure ±10%, bar [PSI]	initial	25...28 [363...406]
	full	31 [449.6]
Max. Steering Pressure, bar [PSI]		245 [3553]
Max. Pressure in Drain Space for the Brake, bar [PSI]		0,5 [7]
Pilot Ratio for the Valve		4,25:1

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.

\*\*\* Static torque is obtained at working pressure - 0 PSI [0 bar].

## DIMENSIONS AND MOUNTING

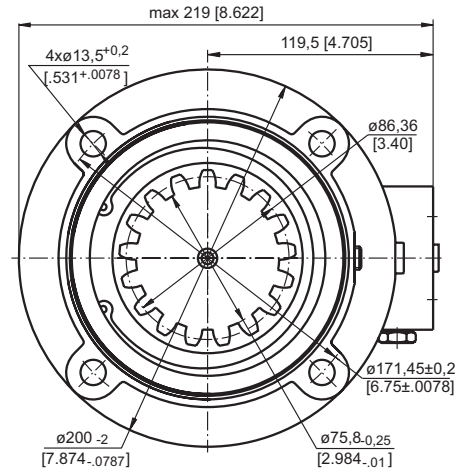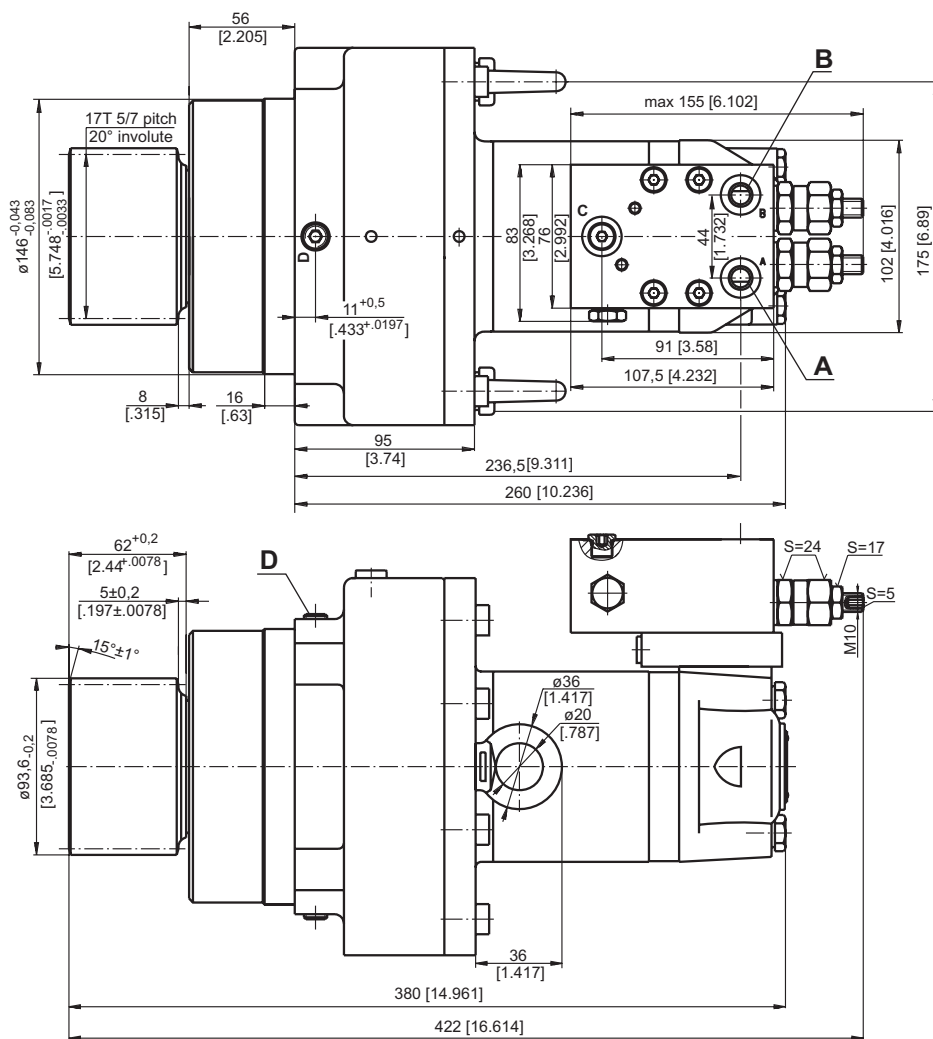


**A,B: 7/16-20 UNF**  
**D : 1/4-18 NPTF**

**Note:** For different port's thread contact with "M+S Hydraulic".




## PERMISSIBLE SHAFT LOADS

The curve applies to a B10 bearing life of 3000 hours at 40 RPM.

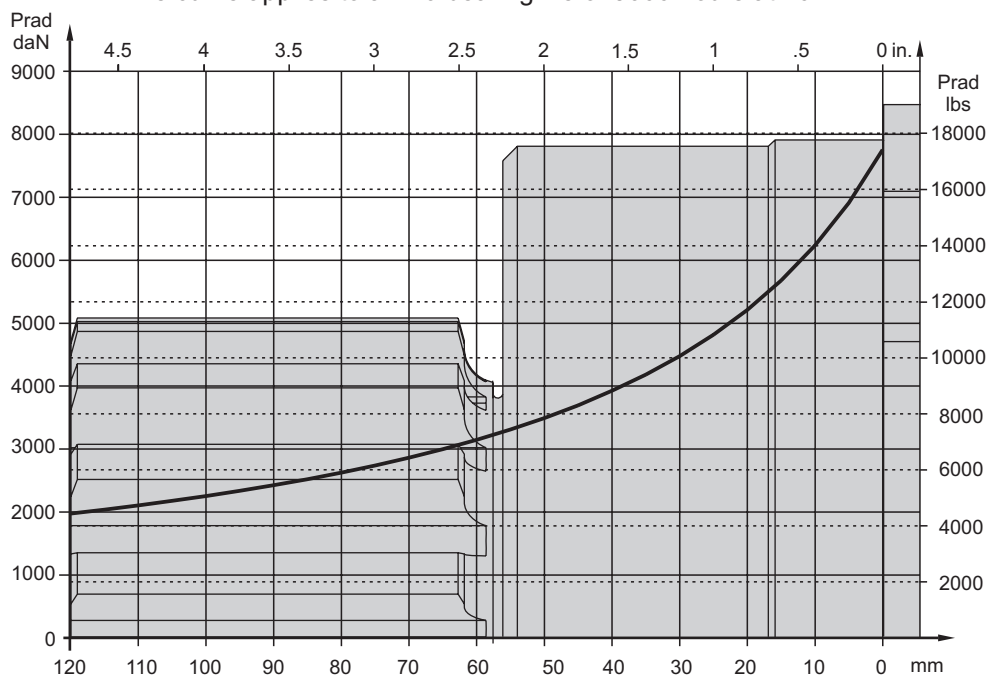


## FUNCTION DIAGRAMS

### SW 500

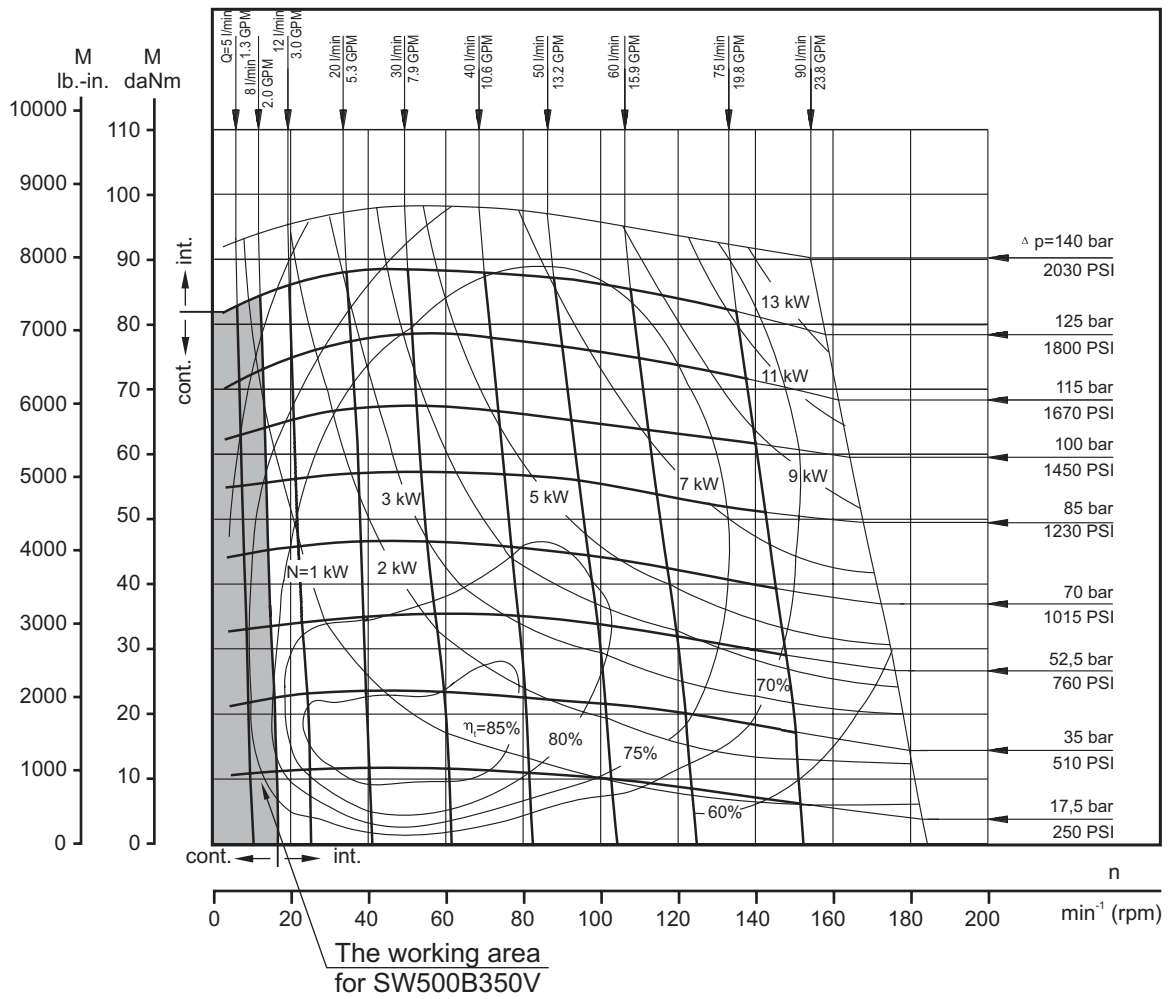


# HYDRAULIC MOTOR-BRAKES TW500B350...V



## APPLICATION


- » Wheel drives
- » Conveyors
- » Rotators
- » Positioners
- » Winches
- » Swing drives
- » Door openers




## CONTENTS

Specification data .....	39
Dimensions and mounting .....	40
Function diagrams .....	40
Order code .....	41

Motor-Brake  
Type TW500B350V

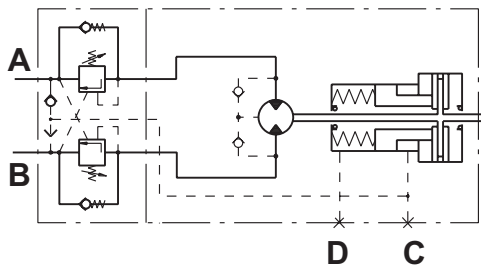

Motor-Brake  
Type TW500B350CV

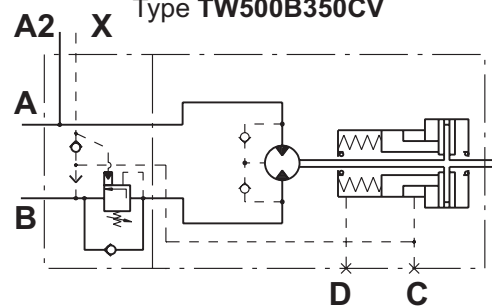

## SPECIFICATION DATA


Type	TW500B350...V
Displacement, cm <sup>3</sup> /rev [in <sup>3</sup> /rev]	475 [29]
Max. Speed, Cont.	40
RPM Int.*	60
Max. Torque, Cont.	114 [10 000]
daNm [in-lb] Int.*	135 [12 000]
Max. Output, Cont.	4,1 [5.4]
kW [HP] Int.*	7,0 [9.39]
Max. Pressure Drop, Cont.	170 [2500]
bar [PSI] Int.*	200 [2900]
Max. Oil Flow, Cont.	20 [5.3]
lpm [GPM] Int.*	35 [9.2]
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, bar [PSI]	75 [1088]
Min. Starting Torque, At max. press. drop Cont.	95 [8400]
daNm [in-lb] At max. press. drop Int.*	112 [9940]
Min. Speed**, RPM	5
Static Torque for the Brake***, daNm [in-lb]	164 [14515]
Release Pressure ±10%, initial	22,5...27,5 [326...400]
bar [PSI] full	28...34 [406...493]
Max. Steering Pressure, bar [PSI]	245 [3553]
Max. Pressure in Drain Space for the Brake, bar [PSI]	0,5 [7]
Pilot Ratio for the Valve	4,25:1

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.

\*\*\* Static torque is obtained at working pressure - 0 bar [0 PSI].




## DIMENSIONS AND MOUNTING

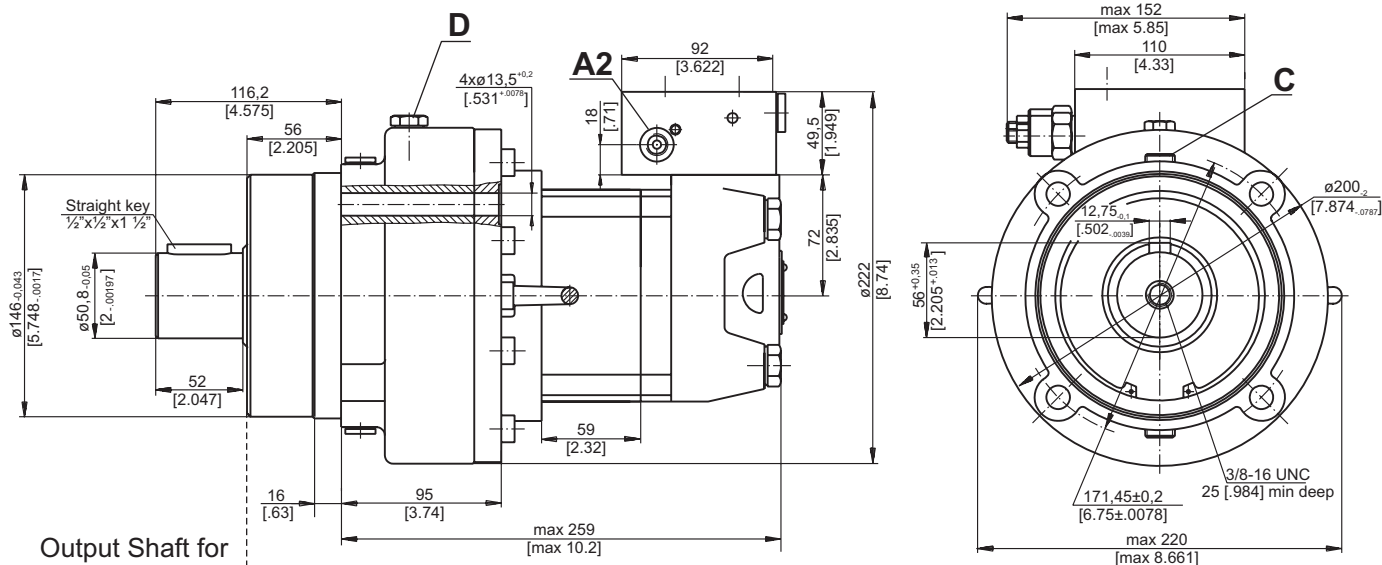

Output Shaft for  
TW500B350V


Valve Block for  
TW500B350V

Valve Block for  
TW500B350CV

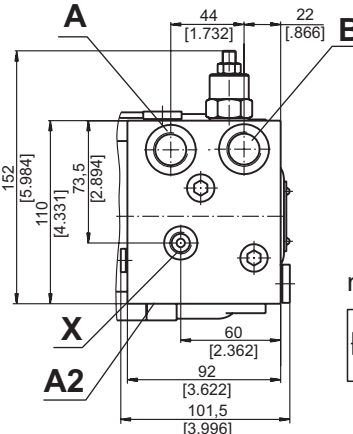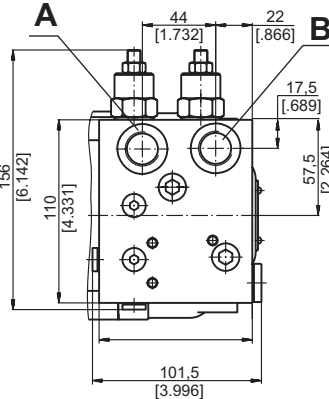

- A,B** : 2x7/8-14 UNF, .65 [17,5] deep  
**D** : 7/16-20 UNF  
**C** : G1/4  
**A2, X** : 7/16-18 UNF, .475 [12] deep


mm [in]



**Note:** For different port's thread contact with "M+S Hydraulic".


## PERMISSIBLE SHAFT LOADS

The curve applies to a B10 bearing life of 3000 hours at 40 RPM.

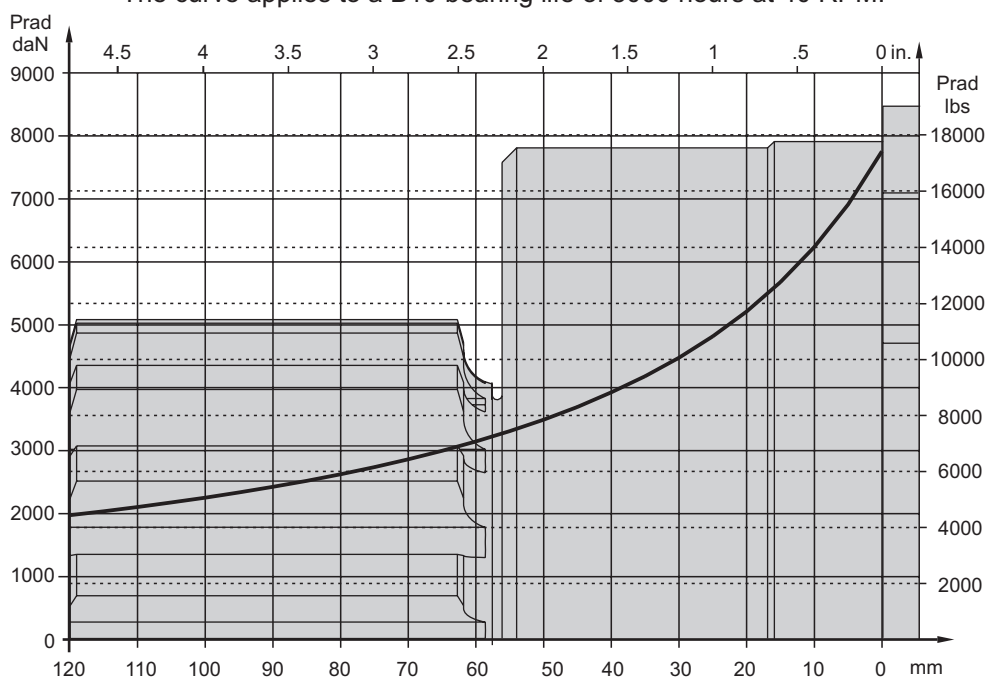

## FUNCTION DIAGRAMS

### TW 500

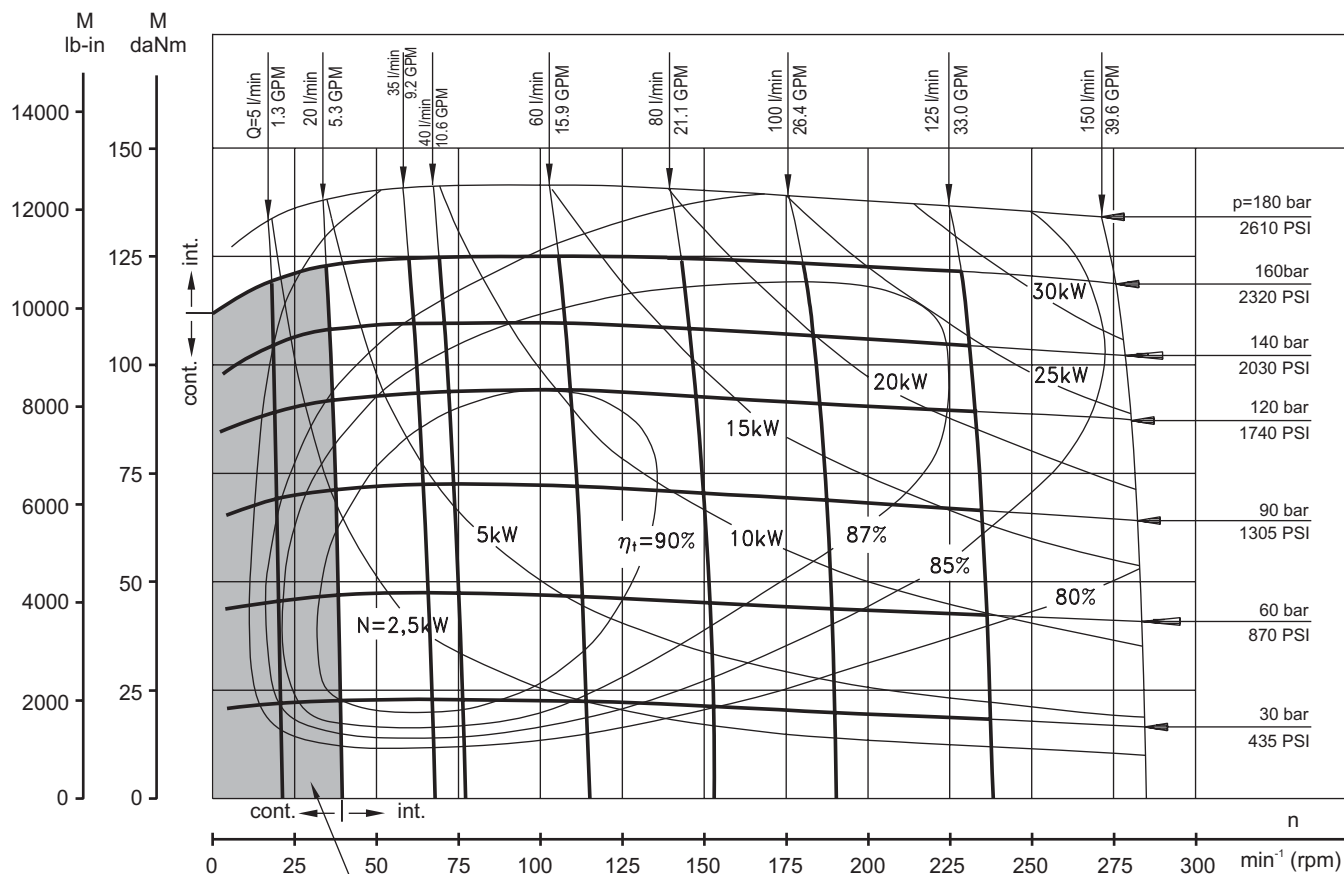

The working area  
for TW500B350V

## ORDER CODE

				1		2
TW	500	B	350		V	

**Pos.1 - Shaft Extension\***

omit - 17T 5/7 pitch 20° involute

**C** - Straight key 1/2"x1/2"x1 1/2"

**Pos.2 - Design Series**


omit - Factory specified

The hydraulic motor-brakes are manganophosphatized as standard.




# VALVES FOR HYDRAULIC MOTORS


## OVERCENTER VALVES WITH BRAKE CONTROL



Single Overcenter Valves  
with Brake Control  
type KPBR ... AE



Single Overcenter Valves  
with Brake Control  
type KPBR ... BE



Dual Overcenter Valves  
with Brake Control  
type KPBR ... D

## CONTENTS

Valves for MP, MR and MH type KPBR ...	43
Valves for MS type KPBS .....	44
Valves for RW and HW type KPBW .....	45
Valves for MT type KPBT .....	46
Valves for MV type KPBV .....	47
Switch valves type KPWR and KPWS ....	48
Switch valves type KPWT and KPWW .....	49

Crossover Relief Valves .....	50
Valves for MP, MR and MH type KP...R ...	50
Valves for MS type KP...S .....	51
Valves for RW and HW type KP...W .....	52
Valves for MT type KP...T .....	54
Valves for MV type KP...V .....	56
Order Code .....	58


## SPECIFICATION DATA

Parameters	Type									
	KPBR...E	KPBS...E	KPBW...E	KPBR...D	KPBS...D	KPBW...D	KPBT...E	KPBT...D	KPBV...E	KPBV...D
Flow Rate , l/min [GPM]	60 [15.85]						100 [26.4]		200 [52.8]	
Rated Pressure*, bar [PSI]	60÷280 [870÷4060]						70÷250 [1015÷3625]			
Pilot Ratio	4,25:1									
Weight , kg	3,020	2,900	3,350	3,060	2,920	3,400	5,400	5,800	9,200	9,750
[lb]	[6.658]	[6.393]	[7.385]	[6.746]	[6.437]	[7.496]	[11.905]	[12.787]	[20.283]	[21.495]


\*Pressure Settings are at flow rate of 5 lpm [1.3 GPM] and viscosity 32 mm<sup>2</sup>/s [150 SUS] at 50 °C [122° F].

## PRESSURE LOSSES


### KPBR..., KPBS... and KPBW...

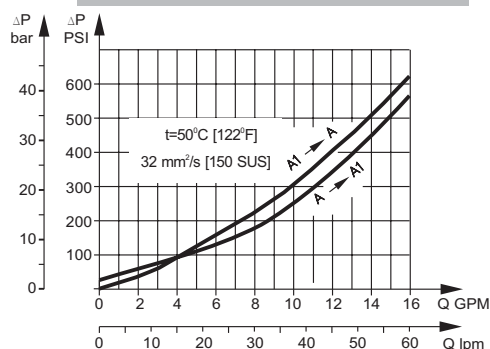

### KPBT..


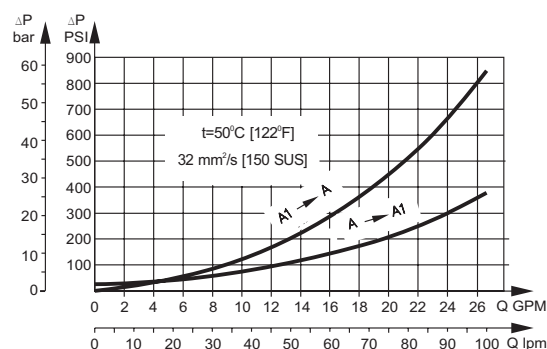


### KPBV..


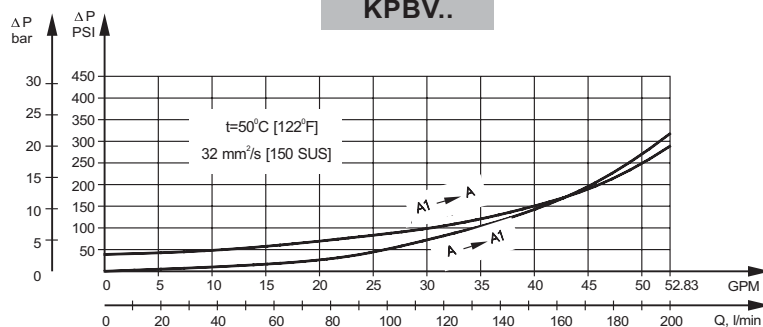


## VALVES FOR MP, MR, MH HYDRAULIC MOTORS

### SINGLE VALVE KPBR-250/1/E...

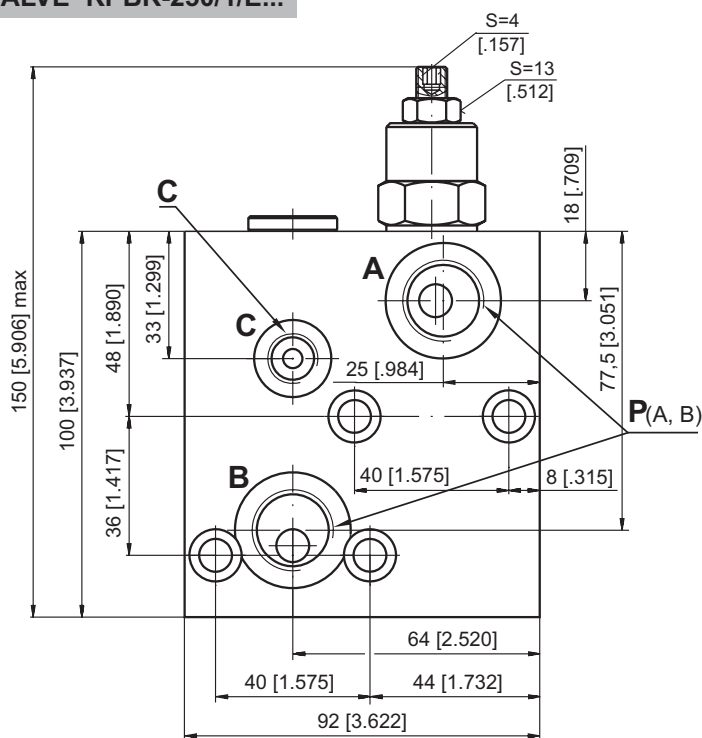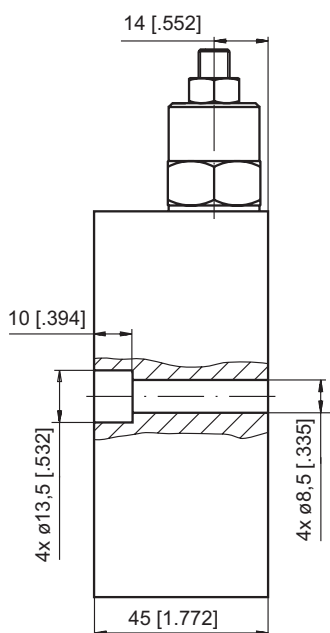

### DUAL VALVE KPBR-250/1/D...

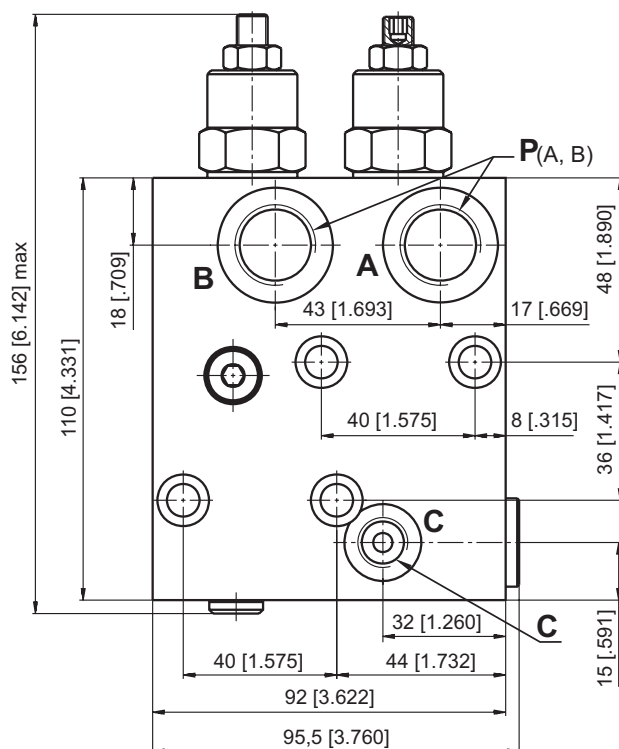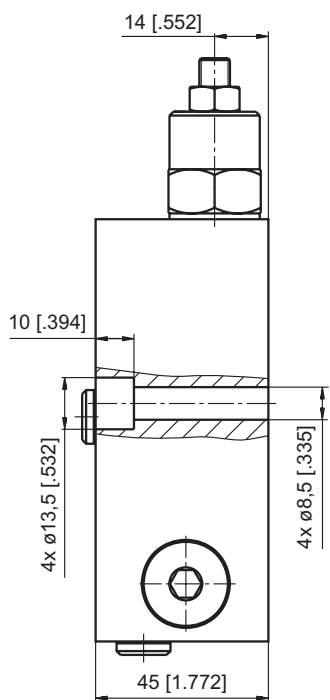



mm [in]

	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C
-	G1/2 16 [.63] depth	G1/4 12 [.47] depth
M	M22x1,5 16 [.63] depth	M14x1,5 12 [.47] depth
A	7/8 - 14 UNF O-ring 16 [.63] depth	7/16 - 20 UNF O-ring 12,7 [.50] depth



**Note :** KPBR Blocks are installed directly on MP, MR and MH Motors with four screws M8x45 - 8.8 DIN 912 or 5/16-18 UNC, 1.75 long ANSI B 18.3 . Tightening torque 1,8 daNm [160 lb-in].

## VALVES FOR MS HYDRAULIC MOTORS

**SINGLE VALVE KPBS-250/1/E...**

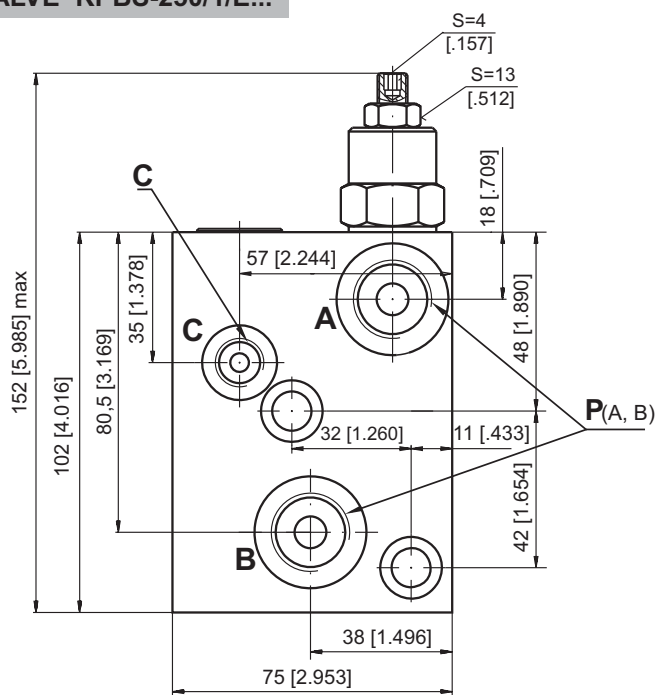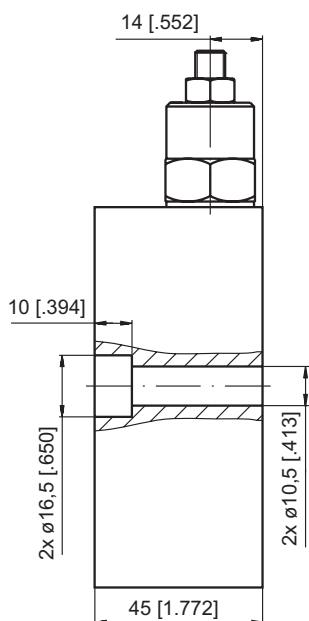

**DUAL VALVE KPBS-250/1/D...**

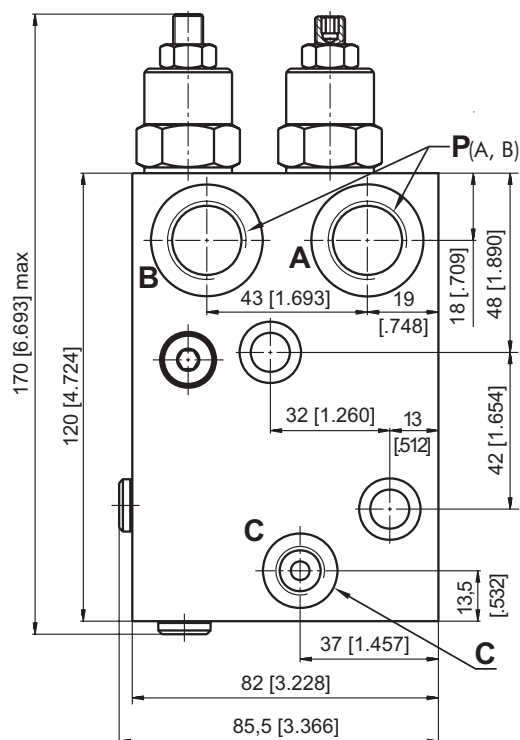
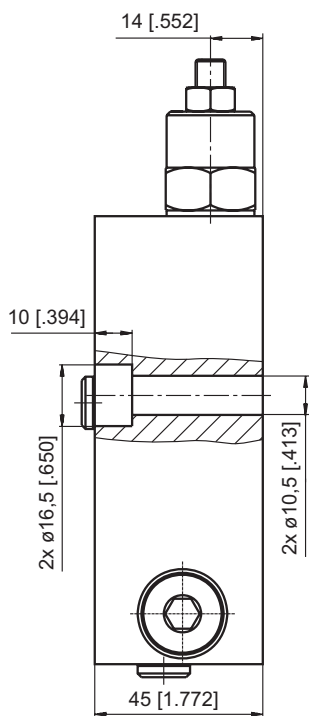


	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C
-	G1/2 16 [.63 ] depth	G1/4 12 [.47] depth
M	M22x1,5 16 [.63 ] depth	M14x1,5 12 [.47] depth
A	7/8 - 14 UNF O-ring 16 [.63 ] depth	7/16 - 20 UNF O-ring 12,7 [.50] depth


**Note :** **KPBS** Blocks are installed directly on MS Motors with two screws M10x45 - 8.8 DIN 912 or 3/8-16UNC, 1.75 long ANSI B 18.3 . Tightening torque 3,5 daNm [310 lb-in].

## VALVES FOR RW and HW HYDRAULIC MOTORS


### DUAL VALVE KPBW-250/1/D...

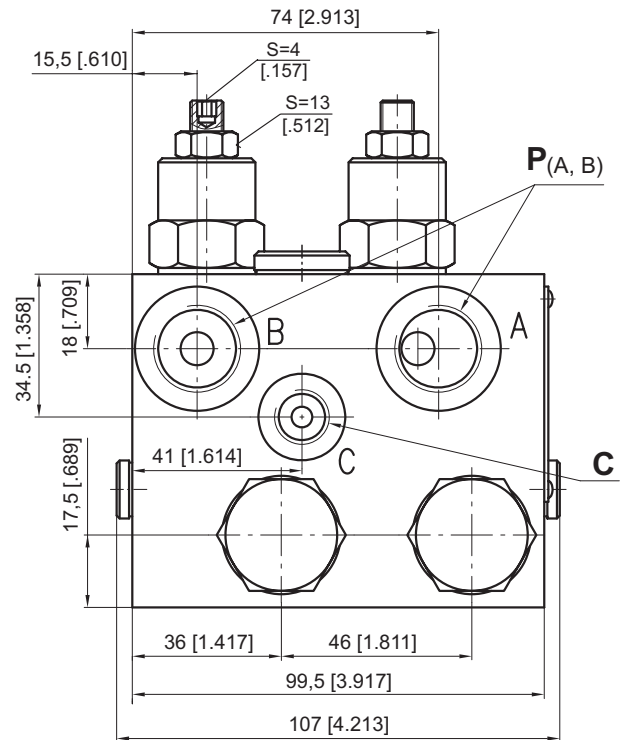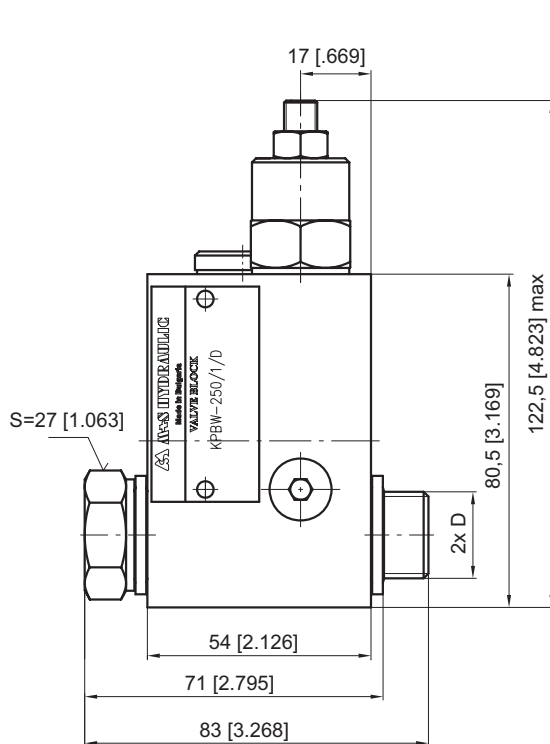


#### KPBW-...A

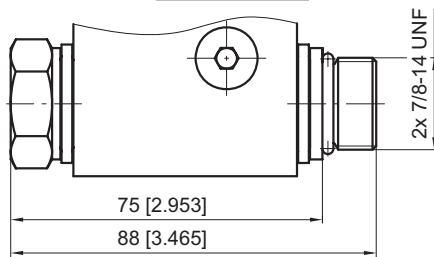

#### SINGLE VALVE KPBW-250/1/AE...

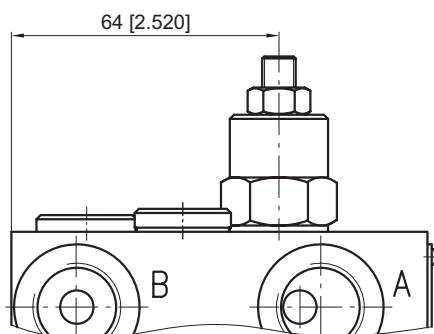

#### SINGLE VALVE KPBW-250/1/BE...

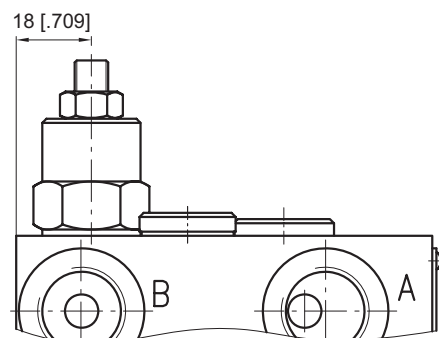


	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C	Thread Ports - D
-	G1/2 16 [0.63] depth	G1/4 12 [0.47] depth	G1/2 12 [0.47] length
M	M22x1,5 16 [0.63] depth	M14x1,5 12 [0.47] depth	M22x1,5 12 [0.47] length
A	7/8 - 14 UNF O-ring 16 [0.63] depth	7/16 - 20 UNF O-ring 12,7 [0.50] depth	7/8 - 14 UNF O-ring 13 [0.51] length




**Note :** KPBW Blocks assembly to RW or HW motors is done with two screws (thread D) included in the valve set. Tightening torque 8 daNm [710 lb-in].

## VALVES FOR MT HYDRAULIC MOTORS

### SINGLE VALVE KPBT-250/1/E...

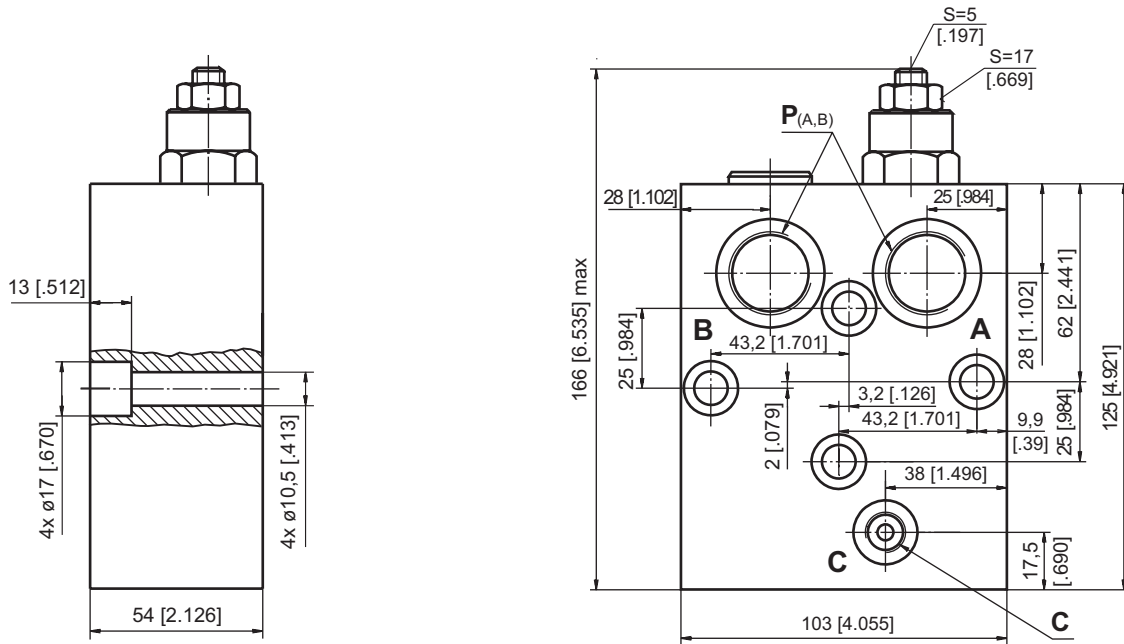

### DUAL VALVE KPBT-250/1/D...

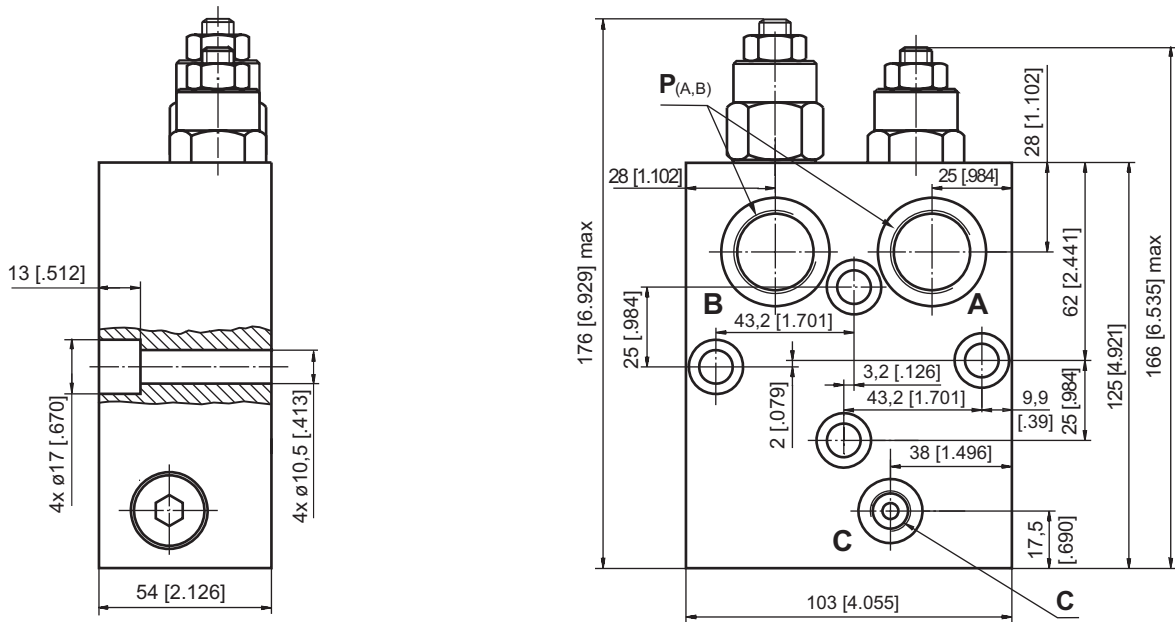



	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C
-	G3/4 17 [.67] depth	G1/4 14 [.55] depth
M	M27x2 17 [.67] depth	M14x1,5 14 [.55] depth
A	1 1/16-12 UN O-ring 17 [.67] depth	7/16 - 20 UNF O-ring 12,7 [.50] depth




**Note :** KPBT Blocks are installed directly on MT Motors with four screws M10x50 - 8.8 DIN 912. Tightening torque 3,5 daNm [310 lb-in].

## VALVES FOR MV HYDRAULIC MOTORS


### DUAL VALVE KPBV-250/1/D...

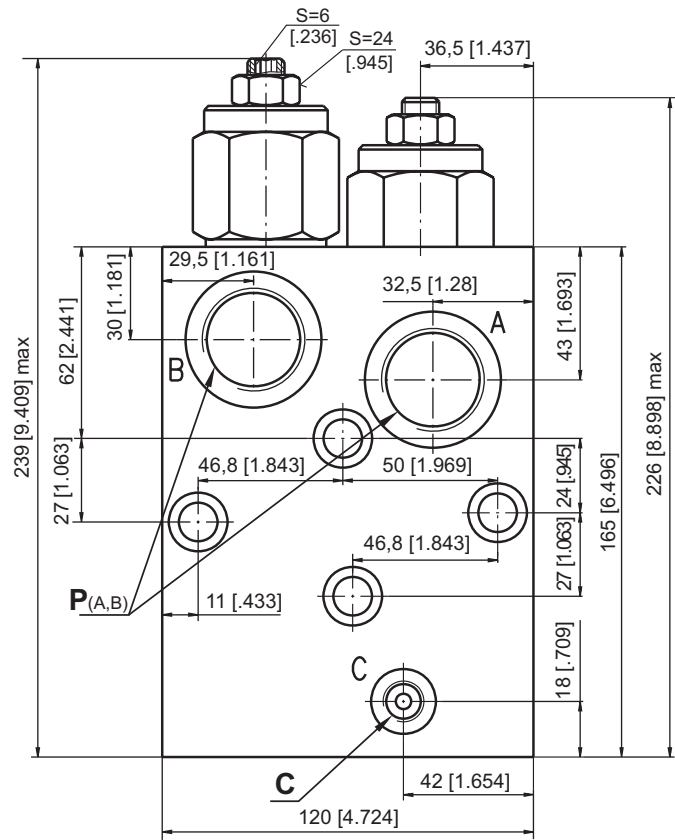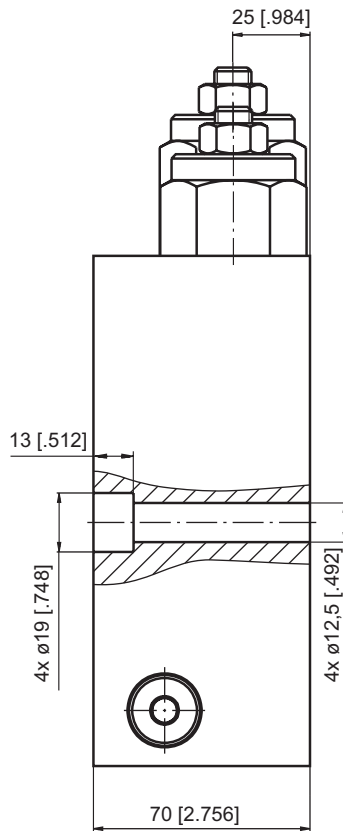

### SINGLE VALVE KPBV-250/1/AE...

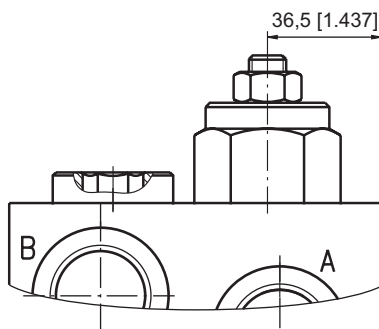

### SINGLE VALVE KPBV-250/1/BE...

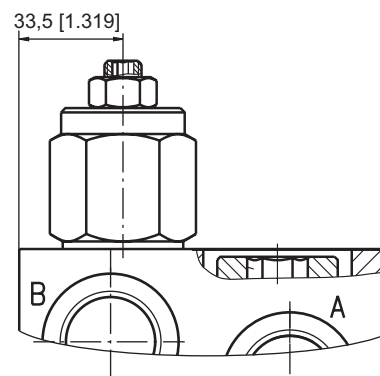

	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C
-	G 1 20 [0.79] depth	G1/4 14 [0.55] depth
M	M33x2 20 [0.79] depth	M14x1,5 14 [0.55] depth
A	1 5/16 - 12 UN O-ring 20 [0.79] depth	7/16 - 20 UNF O-ring 12,7 [0.50] depth




**Note :** KPBV Blocks are installed directly on MV Motors with four screws M12x70 - 8.8 DIN 912. Tightening torque 6,5 daNm [575 lb-in].




**SPECIFICATION DATA**


Parameters	Type	
	KPWR	KPWS
Flow Rate , l/min [GPM]	60	[15.85]
Rated Pressure , bar [PSI]	250	[3625]
Weight , kg	0,850	0,670
[lb]	[1.874]	[1.477]



**VALVE FOR MP, MR, MH HYDRAULIC MOTORS  
KPWR**

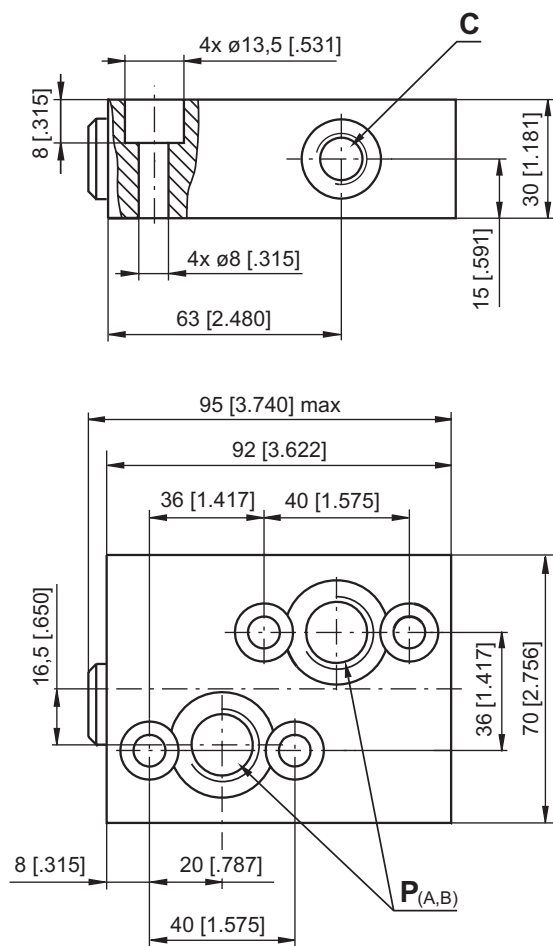

**VALVE FOR MS HYDRAULIC MOTORS  
KPWS**

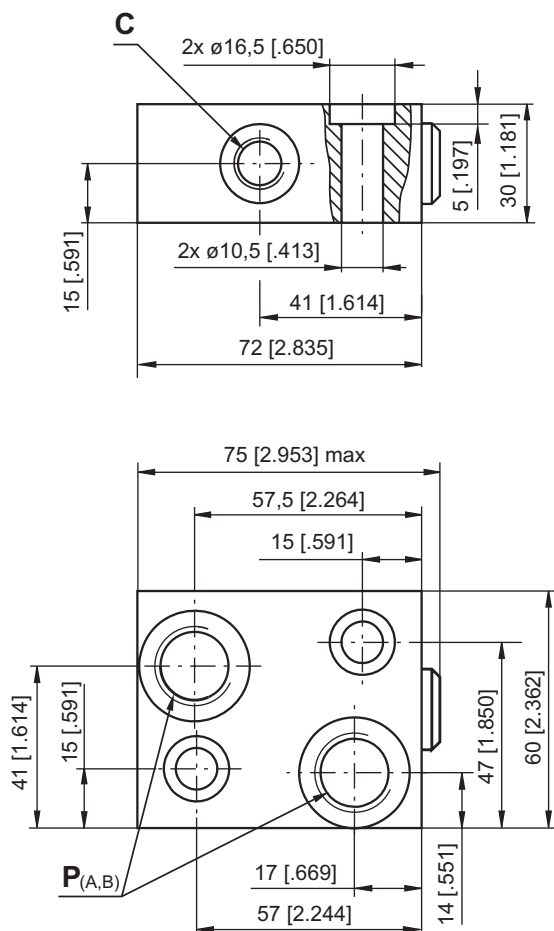

	Thread Ports - P <sub>(A,B)</sub>	Thread Port - C
-	G1/2 17 [.67] depth	G1/4 14 [.55] depth
M	M22x1,5 17 [.67] depth	M14x1,5 14 [.55] depth
A	7/8 - 14 UNF O-ring 17 [.67] depth	7/16 - 20 UNF O-ring 12,7 [.50] depth



**Note : KPWR** Blocks are installed directly on MP, MR and MH Motors with four screws M8x35 - 8.8 DIN 912 or 5/16-18UNC, 1.5 long ANSI B 18.3 . Tightening torque 1,8 daNm [160 lb-in].

**KPWS** Blocks are installed directly on MS Motors with two screws M10x35 - 8.8 DIN 912 or 3/8-16UNC, 1.5 long ANSI B 18.3 . Tightening torque 3,5 daNm [336 lb-in].




## SWITCH VALVE (continued)

### SPECIFICATION DATA


Parameters	Type	
	KPWT	KPWV
Flow Rate , l/min	100	200
Rated Pressure , bar	250	
Weight , kg	1,800	3,150

#### VALVE FOR MT HYDRAULIC MOTORS KPWT

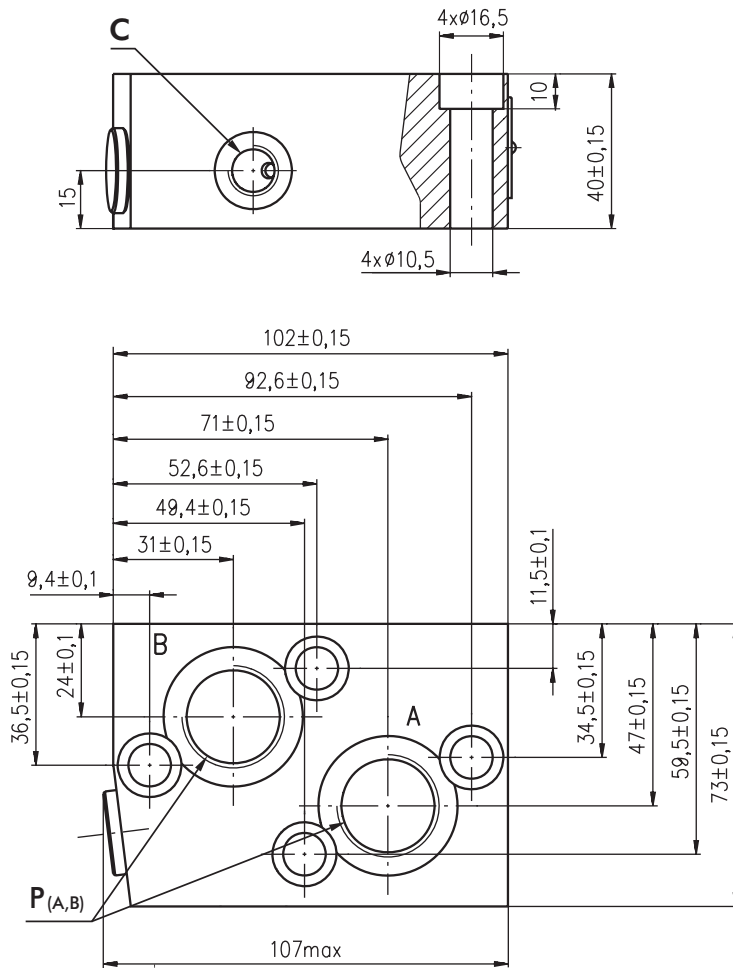

**P<sub>(A, B)</sub>** : G3/4 (M27x2), 17 mm depth  
**C** : G1/4 (M14x1,5), 14 mm depth


#### VALVE FOR MV HYDRAULIC MOTORS KPWV

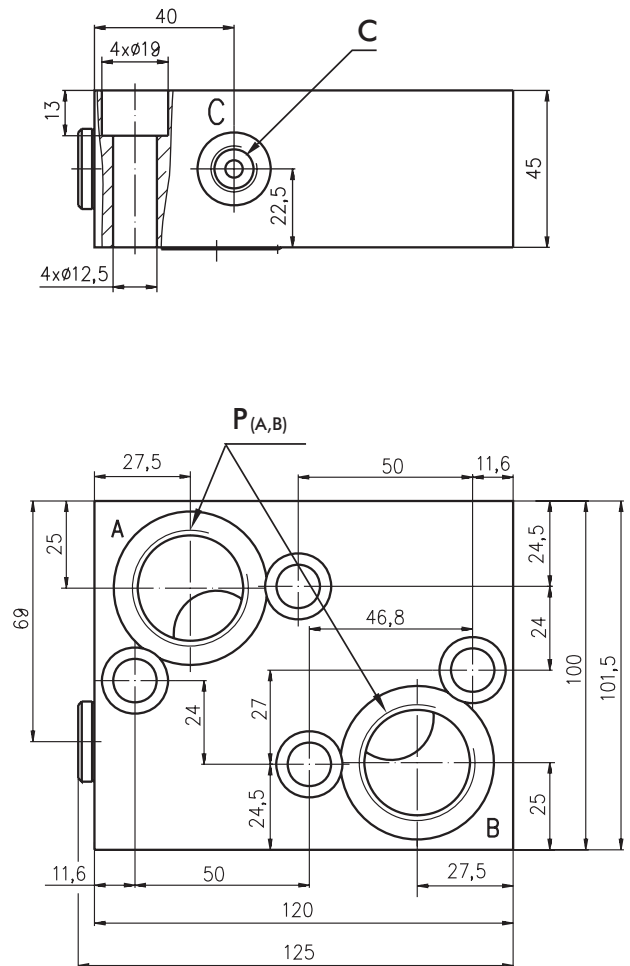


**P<sub>(A, B)</sub>** : G1-A (M33x2), 20 mm depth  
**C** : G1/4 (M14x1,5), 14 mm depth

**Note :** KPWT Blocks are installed directly on MT Motors with four screws M10x40 - 8.8 DIN 912.  
Tightening torque  $3,5^{+0,3}$  daNm.  
KPWV Blocks are installed directly on MV Motors with four screws M12x45 - 8.8 DIN 912.  
Tightening torque  $6,5^{+0,5}$  daNm.


**CROSSOVER RELIEF VALVES**



Single Crossover  
Relief Valve  
type KPE ...



Single Crossover  
Relief Valve  
type KPE ...



Dual Crossover  
Relief Valve  
type KPD ...


**SPECIFICATION DATA**

Parameters	Type			
	KPER	KPDR	KPES	KPDS
Flow Rate , lpm [GPM]	60 [15.85]			
Pressure Range* , bar [PSI]	30 ÷ 100; 50 ÷ 210; 80 ÷ 300 [435÷1450]; [725÷3050]; [1160÷4350]			
Weight , kg [lb]	1,55 [3.42]		1,50 [3.31]	

\*Pressure Settings are at flow rate of 5 lpm [1.32 GPM]  
and viscosity 32 mm<sup>2</sup>/s [150 SUS] (50 °C [122° F]).


**Rated Pressure**

- A → 100 bar [1450 PSI]
- B → 210 bar [3050 PSI]
- C → 250 bar [3625 PSI]

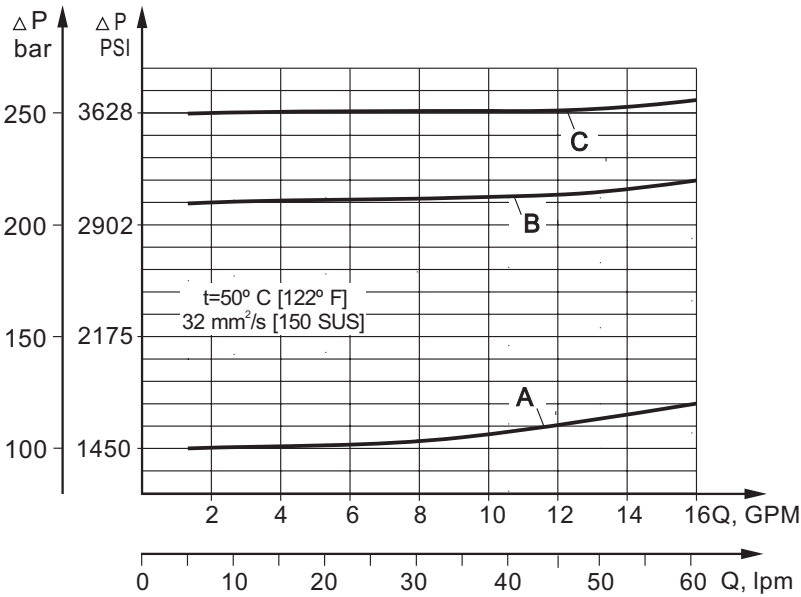


**VALVES FOR MP, MR, MH  
HYDRAULIC MOTORS**

**DUAL VALVE KPDR**

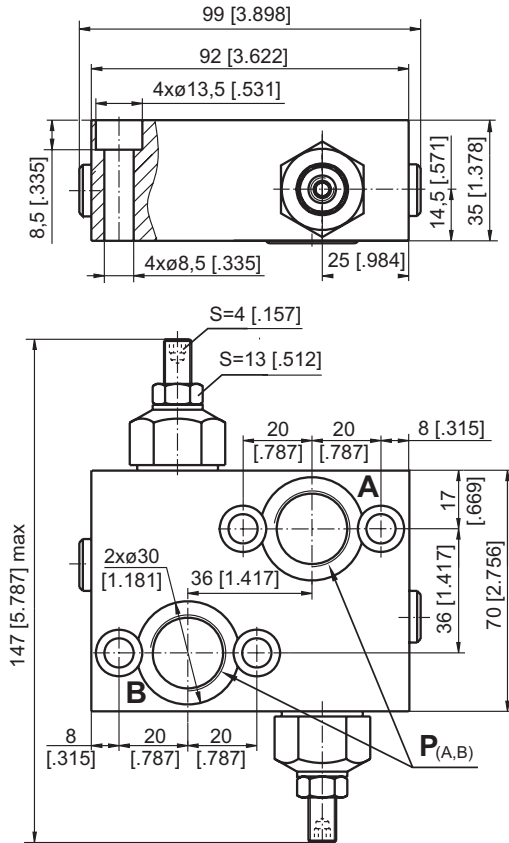


**VALVES FOR MS  
HYDRAULIC MOTORS**


**DUAL VALVE KPDS**

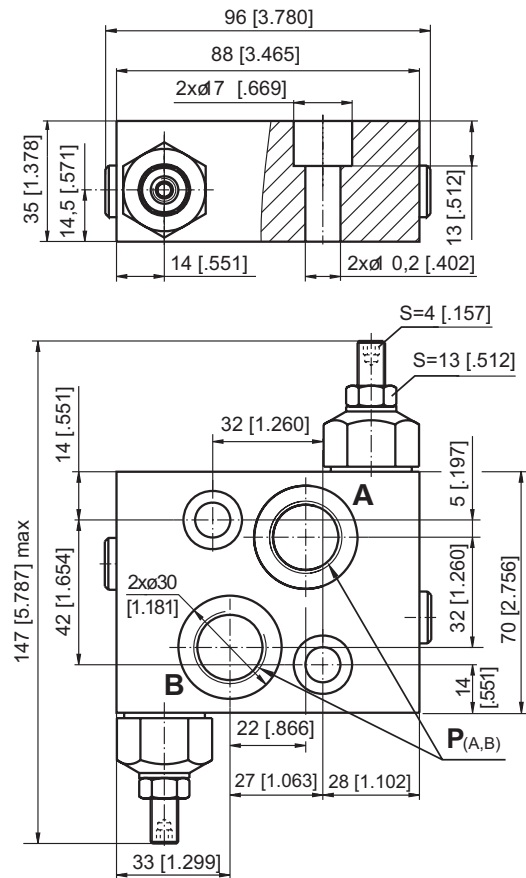

**SINGLE VALVE KPER**

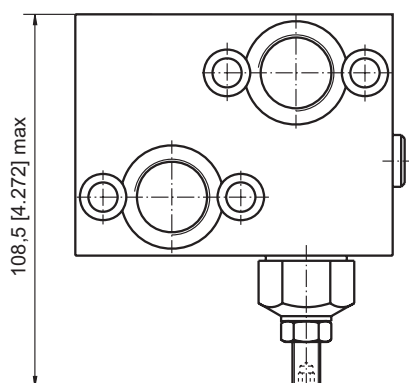

**SINGLE VALVE KPES**

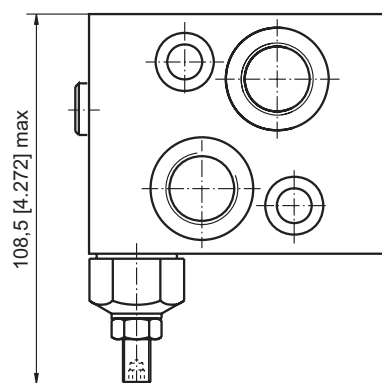


mm [in]

	Thread Ports - P <sub>(A,B)</sub>
-	G1/2 20 [.79] depth
M	M22x1,5 20 [.79] depth
A	7/8 - 14 UNF O-ring 20 [.79] depth


**Note :** **KPDR** and **KPER** Blocks are installed directly on MP, MR and MH Motors with four screws M8x35 - 8.8 DIN 912 or 5/16-18 UNC, 1.5 long ANSI B 18.3 . Tightening torque 1,8 daNm [160 lb-in].

**KPDS** and **KPES** Blocks are installed directly on MS Motors with two screws M10x35 - 8.8 DIN 912 or 3/8-16 UNC, 1.5 long ANSI B 18.3 . Tightening torque 3,5 daNm [310 lb-in].


## VALVES FOR RW and HW HYDRAULIC MOTORS



Single Crossover  
Relief Valve  
type KPEAW ...



Single Crossover  
Relief Valve  
type KPEBW ...



Dual Crossover  
Relief Valve  
type KPDW ...


### SPECIFICATION DATA

Parameters	Type	
	KPE...W	KPDW
Flow Rate , lpm [GPM]	60 [15.85]	
Pressure Range* , bar [PSI]	5 ÷ 40; 30 ÷ 100; 80 ÷ 250 [75÷580]; [435÷1450]; [1160÷3625]	
Weight , kg [lb]	1,80 [3.97]	2,90 [6.39]

\*Pressure Settings are at flow rate of 5 lpm [1.32 GPM]  
and viscosity 32 mm<sup>2</sup>/s [150 SUS] (50 °C [122° F]).



### Rated Pressure

A → 100 bar [1450 PSI]  
B → 210 bar [3050 PSI]  
C → 250 bar [3625 PSI]

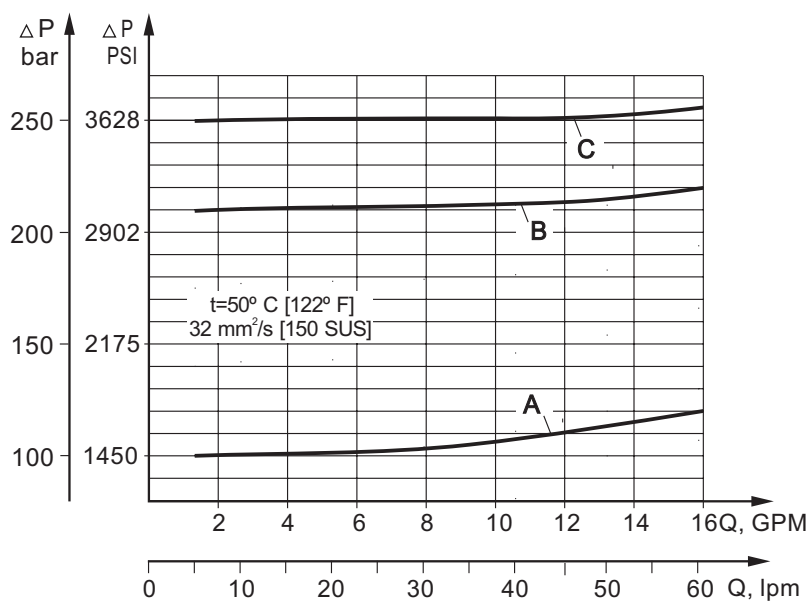


## VALVES FOR RW and HW HYDRAULIC MOTORS


### DUAL VALVE KPDW...

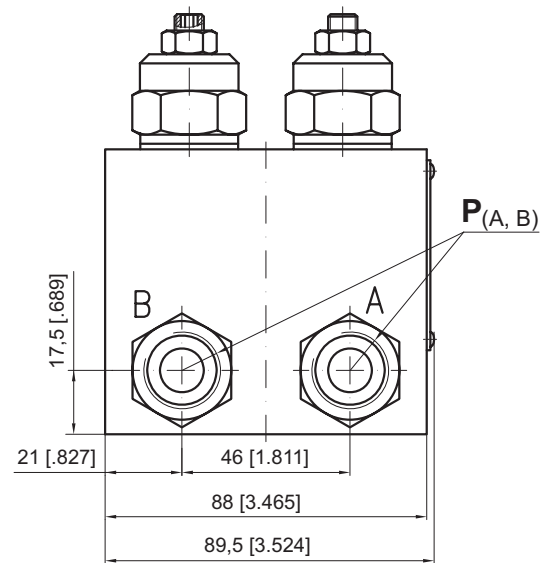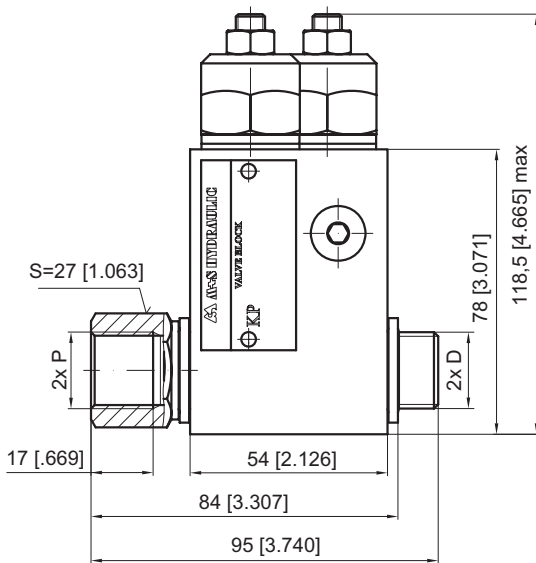


### KPDW-...A

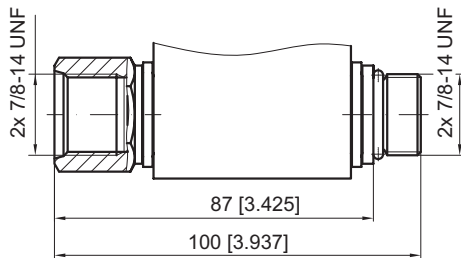

### SINGLE VALVE KPEAW...

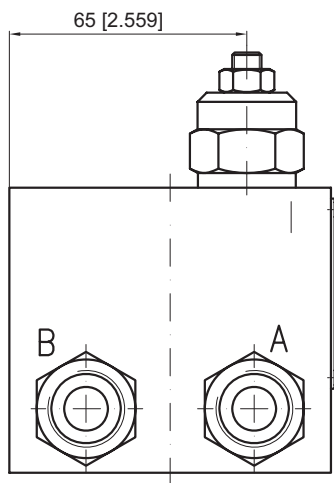


### SINGLE VALVE KPEBW...

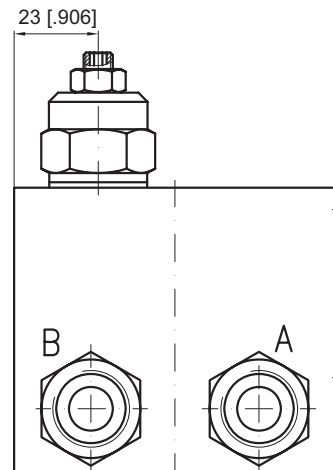


	Thread Ports - P <sub>(A,B)</sub>	Thread Ports - D
-	G1/2 16 [.63] depth	G1/2 12 [.47] length
M	M22x1,5 16 [.63] depth	M22x1,5 12 [.47] length
A	7/8 - 14 UNF O-ring 16 [.63] depth	7/8 - 14 UNF O-ring 13 [.51] length

**Note :** KPDW and KPE..W Blocks assembly to RW or HW motors is done with two screws (thread D) included in the valve set. Tightening torque 8 daNm [710 lb-in].


## VALVES FOR MT HYDRAULIC MOTORS



Single Crossover  
Relief Valve  
type KPEAT ...



Single Crossover  
Relief Valve  
type KPEBT ...



Dual Crossover  
Relief Valve  
type KPDT ...


## SPECIFICATION DATA

Parameters	Type	
	KPE...T	KPDT
Flow Rate , lpm [GPM]	120 [32]	
Pressure Range* , bar [PSI]	80÷210 [1160÷3050]	
Weight , kg [lb]	5,10 [11.24]	5,54 [12.21]



\*Pressure Settings are at flow rate of 5 lpm [1.32 GPM]  
and viscosity 32 mm<sup>2</sup>/s [150 SUS] (50 °C [122° F]).

## Rated Pressure



- A → 50 bar [725 PSI]
- B → 100 bar [1450 PSI]
- C → 150 bar [2175 PSI]
- D → 210 bar [3045 PSI]

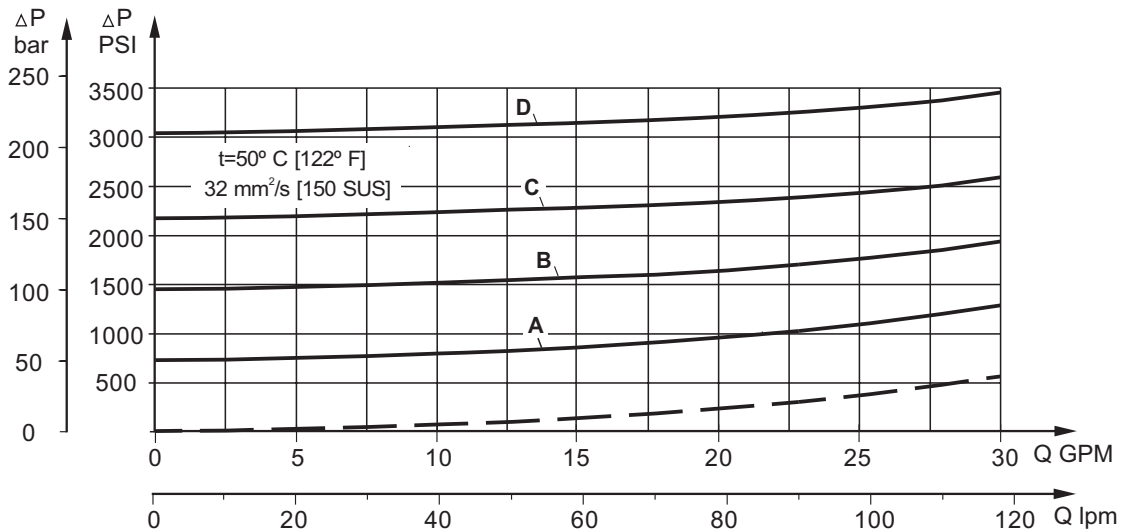

## DUAL VALVE KPDT...

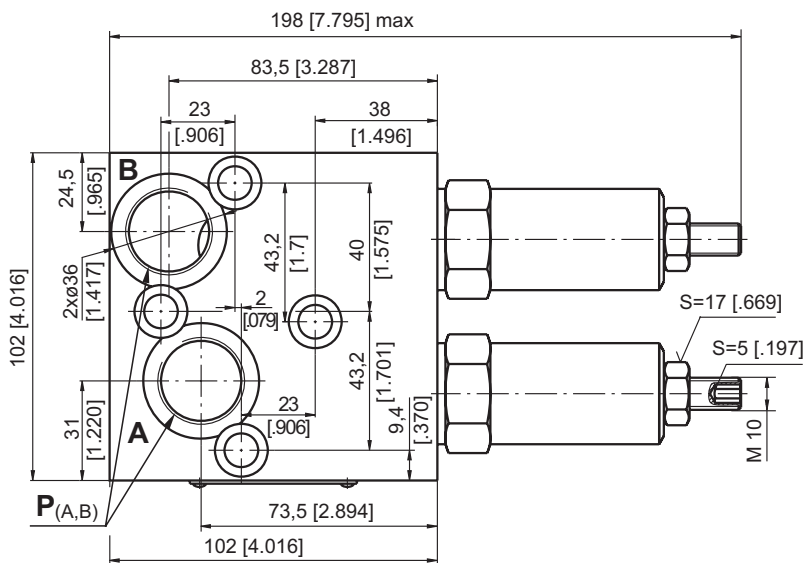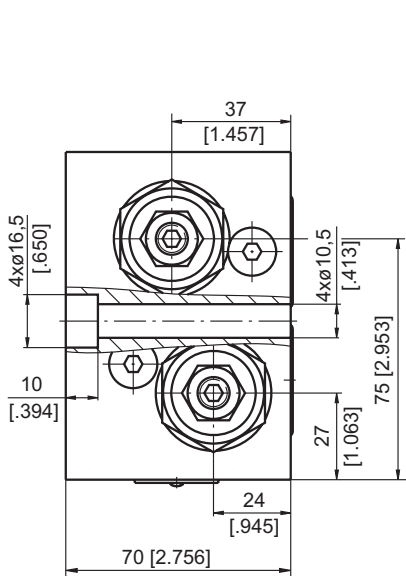

## SINGLE VALVE KPEAT...

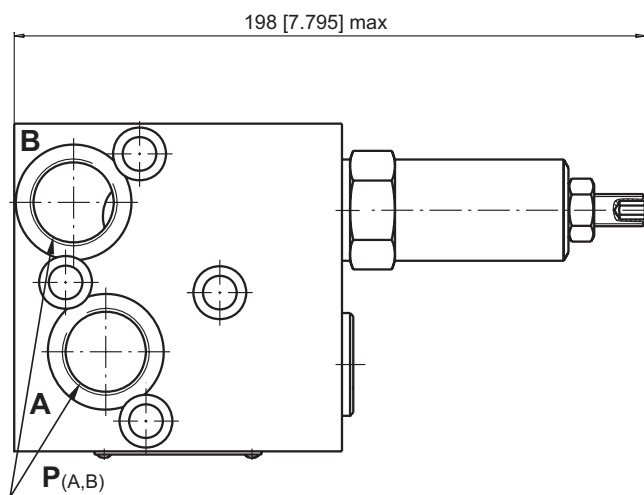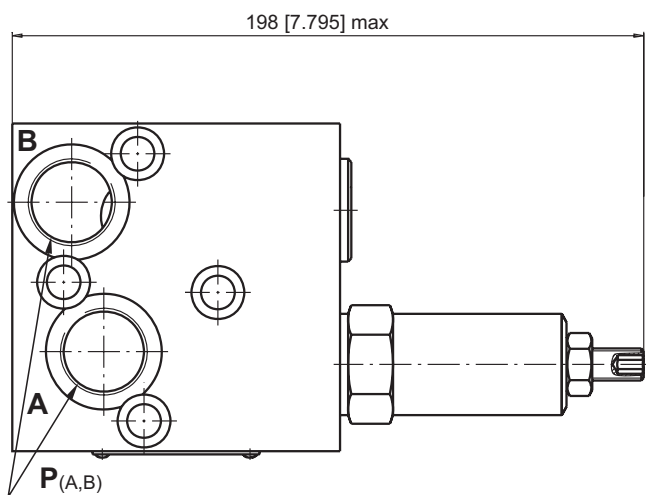


	<b>Thread Ports - P<sub>(A,B)</sub></b>
-	G3/4 20 [.79] depth
M	M27x2 20 [.79] depth
A	1 <sup>1</sup> / <sub>16</sub> -12 UN O-ring 20 [.79] depth


**Note :** KPDT and KPE...T Blocks are installed directly on MT Motors with four screws M10x70 - 8.8 DIN 912. Tightening torque 3,5 daNm [310 lb-in].




## VALVES FOR MV HYDRAULIC MOTORS



Single Crossover  
Relief Valve  
type KPEAV ...



Single Crossover  
Relief Valve  
type KPEBV ...




Dual Crossover  
Relief Valve  
type KPDV ...

### SPECIFICATION DATA


Parameters	Type		
	KPEAV	KPEBV	KPDV
Flow Rate , lpm [GPM]	200 [53]		
Pressure Range* , bar	10÷100; 20÷250		
[PSI]	[145÷1450]; [290÷3625]		
Weight , kg	4,90	7,10	8,00
[lb]	[10.8]	[15.65]	[17.64]

\*Pressure Settings are at flow rate of 5 lpm [1.3 GPM] and viscosity 32 mm<sup>2</sup>/s [150 SUS] (50 °C [122° F]).


### Rated Pressure

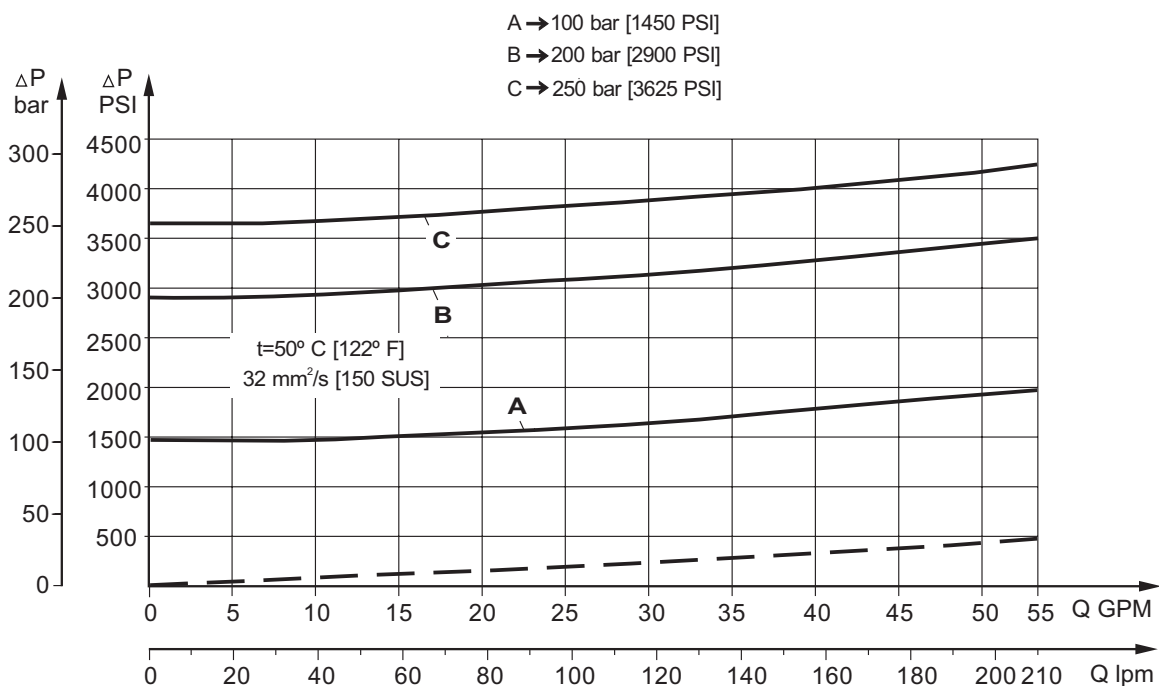


**DUAL VALVE KPDV**

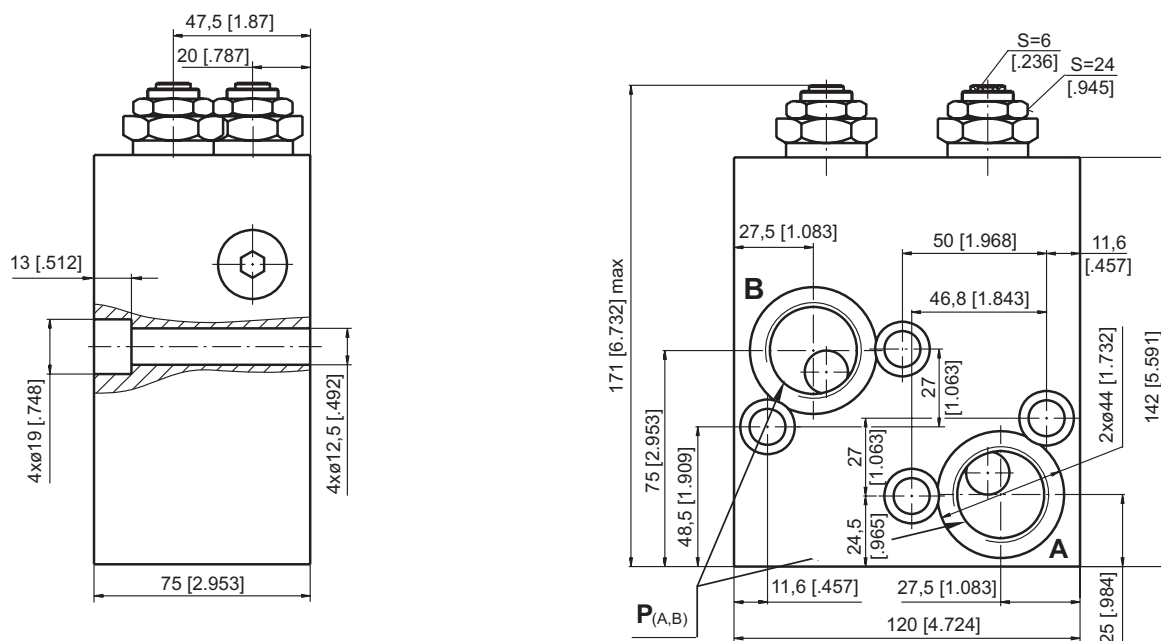

**SINGLE VALVE KPEAV**

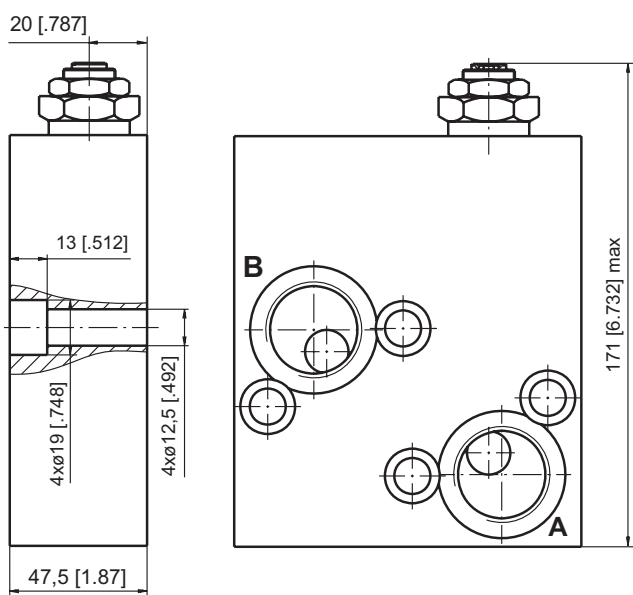

**SINGLE VALVE KPEBV**

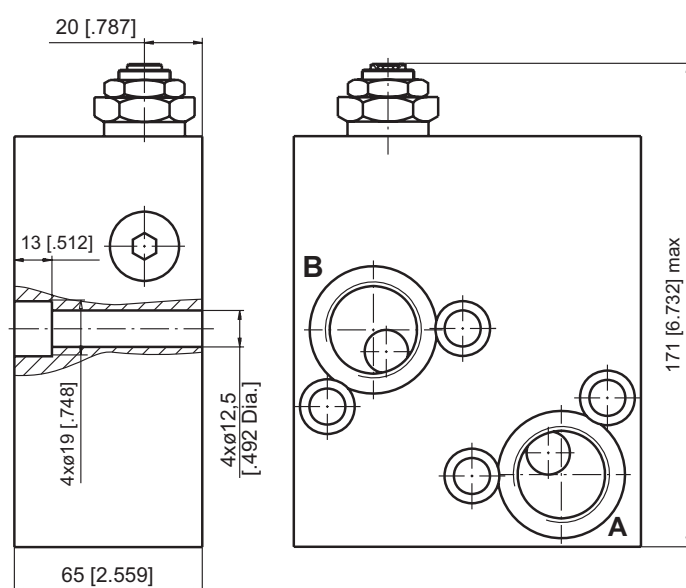

	Thread Ports - P <sub>(A,B)</sub>
-	G1-A 20 [.79] depth
M	M33x2 20 [.79] depth
A	1 5/16 -12 UN O-ring 20 [.79] depth

**Note :** KPDV Blocks are installed directly on MV Motors with four screws M12x75 - 8.8 DIN 912.  
**KPEAV** Blocks are installed directly on MV Motors with four screws M12x50 - 8.8 DIN 912.  
**KPEBV** Blocks are installed directly on MV Motors with four screws M12x65 - 8.8 DIN 912.  
 Tightening torque 7,5 daNm [665 lb-in].

## ORDER CODE - OVERCENTER VALVES WITH BRAKE CONTROL

1	2	3	4	5	6	7
K P B	-	/	/			

**Pos.1 - Housing Type**

- |          |  |
|----------|--|
| <b>R</b> | - Valve block for MP, MR and MH Motors |
| <b>S</b> | - Valve block for MS Motors            |
| <b>W</b> | - Valve block for RW and HW Motors     |
| <b>T</b> | - Valve block for MT Motors            |
| <b>V</b> | - Valve block for MV Motors            |

**Pos.2 - Pressure Range, PSI [bar]**

- |            |   |
|------------|---|
| <b>250</b> | - 1015÷3625 [70÷250], Std Setting 250 bar@5 lpm |
|------------|---|

**Pos.3 - Pilot Ratio**

- |          |          |
|----------|----------|
| <b>1</b> | - 4,25:1 |
|----------|----------|

**Pos.4 - Number of Valves**

- |           |  |
|-----------|--|
| <b>D</b>  | - Two Valves - Dual  |
| <b>E</b>  | - One Valve - Single (for <b>R</b> and <b>S</b> only)                      |
| <b>AE</b> | - One Valve on line A - Single (for <b>T</b> , <b>V</b> and <b>W</b> only) |
| <b>BE</b> | - One Valve on line B - Single (for <b>T</b> , <b>V</b> and <b>W</b> only) |

**Pos.5 - Threaded Ports**

- |          |  |
|----------|--|
| omit     | - BSPP thread - ISO 228                        |
| <b>M</b> | - Metric thread - ISO 262                      |
| <b>A</b> | - Unified inch screw threads ANSI B 1.1 - 1982 |

**Pos.6 - Option [Paint]\*\***

- |           |                             |
|-----------|-----------------------------|
| omit      | - no Paint                  |
| <b>P</b>  | - Painted                   |
| <b>PC</b> | - Corrosion Protected Paint |

**Pos.7 - Design Series**

- |      |                     |
|------|---------------------|
| omit | - Factory specified |
|------|---------------------|

**Notes:** \* Color at customer's request.

## ORDER CODE - SWITCH VALVES

1	2	3	4
K P W			

**Pos.1 - Housing Type**

- |          |  |
|----------|--|
| <b>R</b> | - Valve block for MP, MR and MH Motors |
| <b>S</b> | - Valve block for MS Motors            |
| <b>T</b> | - Valve block for MT Motors            |
| <b>V</b> | - Valve block for MV Motors            |

**Pos.2 - Threaded Ports**

- |          |  |
|----------|--|
| omit     | - BSPP thread - ISO 228                        |
| <b>M</b> | - Metric thread - ISO 262                      |
| <b>A</b> | - Unified inch screw threads ANSI B 1.1 - 1982 |

**Pos.3 - Option [Paint]\*\***

- |           |                             |
|-----------|-----------------------------|
| omit      | - no Paint                  |
| <b>P</b>  | - Painted                   |
| <b>PC</b> | - Corrosion Protected Paint |

**Pos.4 - Design Series**

- |      |                     |
|------|---------------------|
| omit | - Factory specified |
|------|---------------------|

**Notes:** \* Color at customer's request.

## ORDER CODE - CROSSOVER RELIEF VALVE

1	2	3	4	5	6
K P			/		

**Pos.1 - Number of Valves**

- |           |  |
|-----------|--|
| <b>D</b>  | - Two Valves - Dual  |
| <b>E</b>  | - One Valve - Single (for <b>R</b> and <b>S</b> only)                      |
| <b>EA</b> | - One Valve on line A - Single (for <b>T</b> , <b>V</b> and <b>W</b> only) |
| <b>EB</b> | - One Valve on line B - Single (for <b>T</b> , <b>V</b> and <b>W</b> only) |

**Pos.2 - Housing Type**

- |          |  |
|----------|--|
| <b>R</b> | - Valve block for MP, MR and MH Motors |
| <b>S</b> | - Valve block for MS Motors            |
| <b>W</b> | - Valve block for RW and HW Motors     |
| <b>T</b> | - Valve block for MT Motors            |
| <b>V</b> | - Valve block for MV Motors            |

**Pos.3 - Pressure Range, bar [PSI]**

- |             |   |
|-------------|---|
| <b>100</b>  | - 30÷100 [435÷1450], Std Setting 100 bar@5 lpm  |
| <b>210</b>  | - 50÷210 [725÷3050], Std Setting 210 bar@5 lpm  |
| <b>250</b>  | - 20÷250 [290÷3625], Std Setting 250 bar@5 lpm  |
| <b>300*</b> | - 80÷300 [1160÷4350], Std Setting 250 bar@5 lpm |

**Pos.4 - Threaded Ports**

- |          |  |
|----------|--|
| omit     | - BSPP thread - ISO 228                        |
| <b>M</b> | - Metric thread - ISO 262                      |
| <b>A</b> | - Unified inch screw threads ANSI B 1.1 - 1982 |

**Pos.5 - Option [Paint] \*\***

- |           |                             |
|-----------|-----------------------------|
| omit      | - no Paint                  |
| <b>P</b>  | - Painted                   |
| <b>PC</b> | - Corrosion Protected Paint |

**Pos.6 - Design Series**

- |      |                     |
|------|---------------------|
| omit | - Factory specified |
|------|---------------------|

**Notes:** \* Useful for types **R** and **S** only.

\*\* Color at customer's request.

The Valve Blocks are mangano phosphatized as standard.

## MOTOR-BRAKE SPECIAL FEATURES

Special Feature Description	Order Code	Motor type				
		B/MR	MT/B	MTM/B	SW	TW
Low Leakage	LL	○	-	○	-	-
Low Speed Valving	LSV	○	-	○	-	-
Free Running	FR	-	-	○	-	-
Reverse Rotation	R	○	○	○	-	-
Paint*	P	○	○	○	○	○
Corrosion Protected Paint*	PC	○	○	○	○	○
Check Valves		S	S	-	S	S

\* color at customer's request.

○ Optional  
 - Not applicable  
 S Standard

# APPLICATION CALCULATION

## VEHICLE DRIVE CALCULATIONS

### 1. Motor speed: $n$ , RPM

$$n = \frac{2,65 \times v_{km} \times i}{R_m} \quad n = \frac{168 \times v_{mi} \times i}{R_{in}}$$

$v_{km}$  - vehicle speed, km/h;

$v_{mi}$  - vehicle speed, mil/h;

$R_m$  - wheel rolling radius, m;

$R_{in}$  - wheel rolling radius, in;

$i$  - gear ratio between motor and wheels.

If no gearbox, use  $i=1$ .

### 2. Rolling resistance: $RR$ , daN [lbs]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

$G$  - total weight loaded on vehicle, daN [lbs];

$\rho$  - rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	$\rho$
Concrete- faultless	0.010
Concrete- good	0.015
Concrete- bad	0.020
Asphalt- faultless	0.012
Asphalt- good	0.017
Asphalt- bad	0.022
Macadam- faultless	0.015
Macadam- good	0.022
Macadam- bad	0.037
Snow- 5 cm	0.025
Snow- 10 cm	0.037
Polluted covering- smooth	0.025
Polluted covering- sandy	0.040
Mud	0.037÷0.150
Sand- Gravel	0.060÷0.150
Sand- loose	0.160÷0.300

### 3. Grade resistance: $GR$ , daN [lbs]

$$GR = G \times (\sin \alpha + \rho \times \cos \alpha)$$

$\alpha$  - gradient negotiation angle (Table 2)

Table 2

Grade %	$\alpha$ Degrees	Grade %	$\alpha$ Degrees
1%	0° 35'	12%	6° 5'
2%	1° 9'	15%	8° 31'
5%	2° 51'	20%	11° 19'
6%	3° 26'	25%	14° 3'
8%	4° 35'	32%	18°
10%	5° 43'	60%	31°

### 4. Accelerate force: $FA$ , daN [lbs]

Force  $FA$  necessary for acceleration from 0 to maximum speed  $v$  and time  $t$  can be calculated with a formula:

$$FA = \frac{v_{km} \times G}{3,6 \times t}, [\text{daN}] \quad FA = \frac{v_{mi} \times G}{22 \times t}, [\text{lbs}];$$

$FA$  - accelerate force, daN [lbs];

$t$  - time, [s].

### 5. Tractive effort: $DP$ , daN [lbs]

Tractive effort  $DP$  is the additional force of trailer. This value will be established as follows:

-acc.to constructor's assessment;

-as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

### 6. Total tractive effort: $TE$ , daN [lbs]

Total tractive effort  $TE$  is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

$RR$  - force acquired to overcome the rolling resistance;

$GR$  - force acquired to slope upwards;

$FA$  - force acquired to accelerate (acceleration force);

$DP$  - additional tractive effort (trailer).

### 7. Motor Torque moment: $M$ , daNm [lb-in]

Necessary torque moment for every hydraulic motor:

$$M = \frac{TE \times R_m [R_{in}]}{N \times i \times \eta_m}$$

$N$  - motor numbers;

$\eta_m$  - mechanical gear efficiency (if it is available).

### 8. Cohesion between tire and road covering: $M_w$ , daNm [lb-in]

$$M_w = \frac{G_w \times f \times R_m [R_{in}]}{i \times \eta_m}$$

To avoid wheel slipping, it should be observed the following condition  $M_w > M$

$f$  - frictional factor;

$G_w$  - total weight over the wheels, daN [lbs].

Table 3

Surface	Frictional factor $f$
Steel on steel	0.15 ÷ 0.20
Rubber tire on polluted surface	0.5 ÷ 0.7
Rubber tire on asphalt	0.8 ÷ 1.0
Rubber tire on concrete	0.8 ÷ 1.0
Rubber tire on grass	0.4


### 9.Radial motor loading: $P_{rad}$ , daN [lbs]

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft  $P_{rad}$  is a sum of motion force and weight force acting on one wheel.

$G_w$  - Weight held by wheel;

$P_{rad}$  - Total radial loading of motor shaft;

$M/R$ - Motion force.





$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

## DRAINAGE SPACE AND DRAINAGE PRESSURE

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

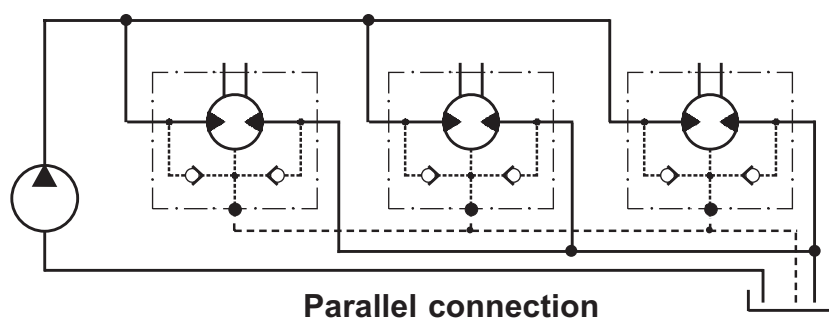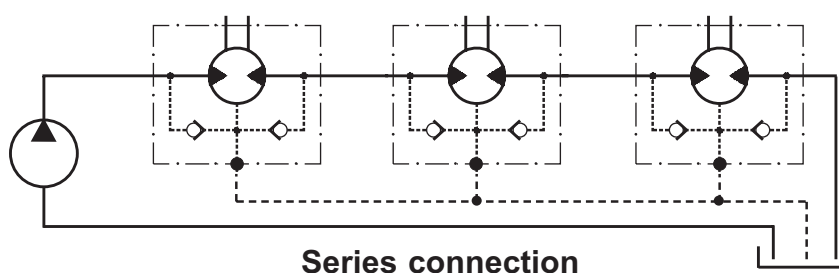

# WARRANTY

M+S Hydraulic warrants, what its products, supplied directly to original equipment manufacturer, authorized distributor or other customer, will be free of defects in material or workmanship at the time of shipment from M+S Hydraulic and will conform to the products technical documentation (drawings and specifications) under sale agreement with Buyer.

This warranty will apply only to defects appearing within applicable Warranty period, mentioned below. If Buyer notify M+S Hydraulic within the Warranty period about any such defects, M+S , at its sole option will replace or repair the defective products or their parts found by M+S Hydraulic to be defective in material or workmanship.

THE FOREGOING LIMITED WARRANTY IS AVAILABLE ONLY IF "M+S HYDRAULIC" IS PROMPTLY NOTIFIED IN WRITING OF THE ALLEGED DEFECT AND DOES NOT COVER FAILURE TO FUNCTION CAUSED BY DAMAGE TO THE PRODUCT, IMPROPER INSTALLATION, UNREASONABLE USE OR ABUSE OF THE PRODUCT, FAILURE TO PROVIDE OR USE OF IMPROPER MAINTENANCE OR USUAL, DEGRADATION OF THE PRODUCT DUE TO PHYSICAL ENVIRONMENTS OF AN USUAL NATURE. THE FOREGOING REMEDIES ARE THE SOLE AND EXCLUSIVE REMEDIES AVAILABLE TO CUSTOMER. To facilitate the inspection, M+S Hydraulic may require return of the product/part, which Buyer claims to be defective.

M+S Hydraulic shall not be liable for labor costs or any other expenses incurred during the disassembling or reinstalling of the product/part.

In case the claimed products are returned to M+S Hydraulic in bad condition: dirty, disassembled, with damaged or missing parts during transportation, the warranty will be considered as not applicable and the products will not be liable to repair.

## Warranty periods

**New products:** The Warranty period is limited to 24 consecutive months (2 years) from the date of production of the product.

**Repaired products:** If the product is repaired in M+S Hydraulic during its warranty period, the warranty period of the repaired item shall continue for the balance of original Warranty period or for a period equal to 50% of the original new product Warranty period, whichever is later.

**Spare parts:** The Warranty period for Spare parts shall be 12 consecutive months (1 year) from the dispatch date of such parts from M+S Hydraulic.

**LIMITATION OF LIABILITY** M+S Hydraulic's liability for any claim of any kind , for any loss or damage arising out of, connected with or resulting from an order, or from the performance or branch thereof, or from the design, manufacture, sale delivery, operation or use of any of its products shall be limited to , at M+S 's sole option, replacement, repair of any defective product or the issuance of a credit to Customer against any future purchases. Cash refunds will not be made under any circumstances and Customer will not be entitled to recover any damages of any kind against M+S Hydraulic, including but not limited to incidental or consequential damages, whether direct or indirect, known or unknown, foreseen or unforeseen.